



GUIDE 2021
PRODUCTS AND SYSTEMS
VRF



Inspiring Solutions since 1989



This document is dedicated to those looking for VRF solutions for heating, air conditioning, air renewal and air purification.

Solutions able to increase the comfort level in the places where we live, work and spend our free time.

Complete year round systems, focused on substantial energy savings and less dependency on the fossil fuels used by traditional HVAC solutions, such as natural gas or oil.

INSPIRING SOLUTIONS

This Guide is printed every year and presents all Clivet's products with the aim of providing a basis for decisions and evaluations.

More detailed information, updated regularly, is available in the "SYSTEMS AND PRODUCTS" area at www.clivet.com, www.clivetlive.com and on Clivet Apps, where they can be downloaded free of charge.

To keep up to date with Clivet news, follow us on our social networks:





CLIVET. INSPIRING SOLUTIONS

OUTDOOR UNITS

INDOOR UNITS

HRV and PRIMARY AIR

CONTROL SYSTEMS

BRANCH JOINTS

ALWAYS READY FOR THE FUTURE

INSPIRING SOLUTIONS

In over 30 years of working on the design, manufacturing and distribution of air conditioning and handling systems, combining high efficiency with minimal environmental impact, Clivet has developed solutions to ensure sustainable comfort and the well-being of people and the environment.

Designing and developing year-round air conditioning solutions with innovative technologies are part of Clivet's DNA, which means the company has always been ready for the future.




COMFORT FOR THE PLANET & PEOPLE

OUR VALUES

IN THE RESIDENTIAL, COMMERCIAL AND INDUSTRIAL SECTORS

Increasing comfort, saving energy and providing customers with the best value for the entire life cycle of the system: these are the values that inspire our systems for the residential, services and industrial sectors.

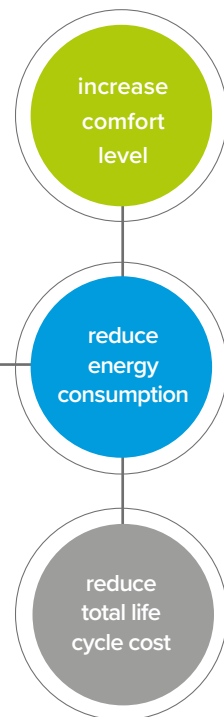

OUR NUMBERS

50.000 m²
OF PLANTS IN FELTRE,
BELLUNO - ITALY

35
AGENCIES
IN ITALY

640
EMPLOYEES IN ITALY
AND ABROAD

90
COUNTRIES WE
EXPORT TO

160
SERVICE CENTRES

7 BRANCHES:
GREAT BRITAIN,
GERMANY, INDIA,
RUSSIA, UNITED ARAB
EMIRATES,
CHINA, BALKANS

2016
STRATEGIC ALLIANCE
WITH MIDEA GROUP

2015
CLIVET LIVE IS BORN

2020
MIDEA GROUP #307 FORTUNE
GLOBAL 500
40.440 \$M
MIDEA TURNOVER

Why choose the VRF system



HIGH EFFICIENCY

Thanks to a full DC inverter range (compressors, fans) and electronic controls that allow only the power actually required by the individual zones to be supplied, the VRF system offers high efficiency and energy savings.



SYSTEM FLEXIBILITY AND MODULARITY

The VRF system is able to meet the demands of air conditioning from small to large buildings, thanks to a wide range of units and extended cooling lengths. The system architecture is designed to be totally modular, combining units and controls according to specific needs. The automatic unit addressing function, available as standard, greatly simplifies and speeds up the installation phase.



WIDE OPERATION RANGE AND HIGH RELIABILITY

The correct functioning of the system is ensured up to -25°C in heating and from -15°C to 52°C in cooling. Reliability is guaranteed by rigorous tests in the production phase and by multiple functions, including the rotation of the compressors for balancing the operating time and the backup in case of emergency in multi-module systems.



LOCAL OR REMOTE MULTI-ZONE CONTROL

The wide range of control systems makes it possible to take full advantage of the total independence of the terminals located in the different areas of the building, based on the specific requests. Commands are available for local management (individual units or centralized), or remotely (via cloud from a smartphone, tablet or PC).



OUTDOOR UNITS

WIDE RANGE

- ✓ Capacity from 8 to 45 kW for Mini VRF and from 25 to 270 kW for VRF, in order to cover the maximum number of applications

HIGH SEASONAL EFFICIENCIES

- ✓ Maximum efficiencies at most frequent load conditions

WIDE OPERATING RANGE

- ✓ With special attention to cooling and heating guaranteed at low temperatures, thanks to the full DC inverter range

INTELLIGENT DEFROSTING

- ✓ Saves energy by adjusting duration and frequency

NIGHT SILENT MODE

- ✓ Several silent modes increase quietness and internal comfort

ROTATION AND BACKUP FUNCTION

- ✓ In systems with several external modules, the different units are used in such a way as to balance the operating hours, extending the useful life of the entire system. Similarly, in the event of a failure of one of the modules, the system compensates for the malfunction by automatically activating the others, allowing continuity of service

AUTO ADDRESSING

- ✓ The outdoor unit is designed to assign addresses to system units automatically, simplifying installation

INDOOR UNITS



IDEAL FOR ANY ENVIRONMENT:

- ✓ Offices, Restaurants, Residential, Hotels, Commercial areas

HIGH PERFORMANCE

- ✓ High efficiency DC inverter fans and heat exchangers

STANDARD AIR FILTER

- ✓ G2 class washable filter designed for easy removal

AUTOMATIC RESTART

- ✓ Restart 3 minutes after power recovery with the latest operating settings

INTEGRATED ELECTRONIC EXPANSION VALVE

- ✓ Precise regulation of refrigerant in the heat exchanger

WIDE RANGE

- ✓ more than 100 models in 14 different types from 1,7 to 56 kW

7 FAN SPEEDS AVAILABLE

- ✓ All series are adjustable through 7 fan speeds to ensure maximum comfort

HRV AND PRIMARY AIR



WIDE RANGE AND MAXIMUM EFFICIENCY

- ✓ Several series of units complete the range to combine air conditioning with air renewal, in order to guarantee maximum healthiness of the environment with particular attention to energy efficiency

COMPLETE INTEGRATION

- ✓ All the units are fully integrated in the range of control systems, for maximum immediacy in managing the system

CONTROL SYSTEMS



LOCAL OR REMOTE CONTROLS

- ✓ A wide range of commands allows you to manage different zones locally or remotely independently depending on your specific needs

A CONTROL FOR EVERY APPLICATION

- ✓ Multiple solutions are available: wireless and wired remote controls, centralised touchscreen controls, interfaces for cloud control from smartphones, tablets or PCs, supervision systems for centralised management of multiple systems in different locations and BMS interfaces for integration of the VRF system with third party equipment

CLIVET-MIDEA PARTNERSHIP, THE WORLD'S BEST TECHNOLOGY

Thanks to the alliance with **Midea**, Clivet works closely with the **world's second largest producer of VRF** and the **world's number one exporter of air conditioning units**, which can boast:

- ✓ **Over 20 years** of evolution of the VRF System;
- ✓ **7 generations** of product technology;
- ✓ More than **400 patents** related to VRF;
- ✓ More than **420.000 outdoor units sold** in 2020;
- ✓ More than **980 million Euros in turnover** in 2020 for VRFs.
- ✓ **World's No.1 China-based VRF exporter** in 2018

Clivet can therefore offer the **widest range of capacities on the market** (from 7 kW/2.5 HP to 270 kW/96 HP) with Full DC inverter technology for energy saving and maximum flexibility of application thanks to the extended connectable piping (up to a maximum of 1000 m). These features provide significant benefits:

- ✓ **Reduction of time and costs.** Thanks to the simplified installation compared to traditional VRF systems, extra costs such as outdoor unit modules, additional piping, larger welds and longer installation times are eliminated;
- ✓ The considerable capacity range reduces the overall dimensions by up to 25%.




A Group Company of



Certifications and safety



Clivet products comply with applicable product directives, as required in all EU countries, in order to guarantee an appropriate level of safety.



In 2015, Clivet became a partner of CasaClima. As a result, Clivet is now part of a network of companies renowned for their technical expertise and constant focus on sustainable home management.



The wide range of Clivet products and complete systems comply with the requirements of the implementing measures for ErP (Energy related Products) Directives 2009/125/EC (Eco-design) and 2010/30/EU (Energy labelling), whose purpose is to reduce the energy consumption of products for heating, cooling, ventilation and hot water production, encouraging the user towards energy-efficient choices.

Directives 2009/125/EC and 2010/30/EU include the following Regulations: (EU) 206/2012, (EU) 626/2011; (EU) 811/2013, (EU) 812/2013, (EU) 813/2013, (EU) 814/2013; (EU) 1253/2014, (EU) 1254/2014; (EU) 2016/2281.



With the aim of providing Customer satisfaction, Clivet S.p.A. has supplemented and certified its Quality, Environment and Safety Management Systems, in accordance with the ISO 9001, ISO 14001 and ISO 45001 International Standards.




Clivet is committed in promoting the green building principles and has become a member of GBC Italia. This organization collaborates with USGBC, the U.S. nonprofit organization that promotes worldwide the LEED® system of independent certification.




Clivet participates in the EUROVENT "Liquid Chilling Packages and Heat Pumps", "Rooftops", "Air Handling Units" and "VRF" Certification programmes. The products concerned feature in the EUROVENT guide to certified products and on the website www.eurovent-certification.com. The programmes apply to water chillers up to 1500 kW, to rooftops up to 100 kW, to air handling units and to VRF up to 100 kW.

ALL TECHNOLOGIES FOR A COMPLETE PROPOSAL

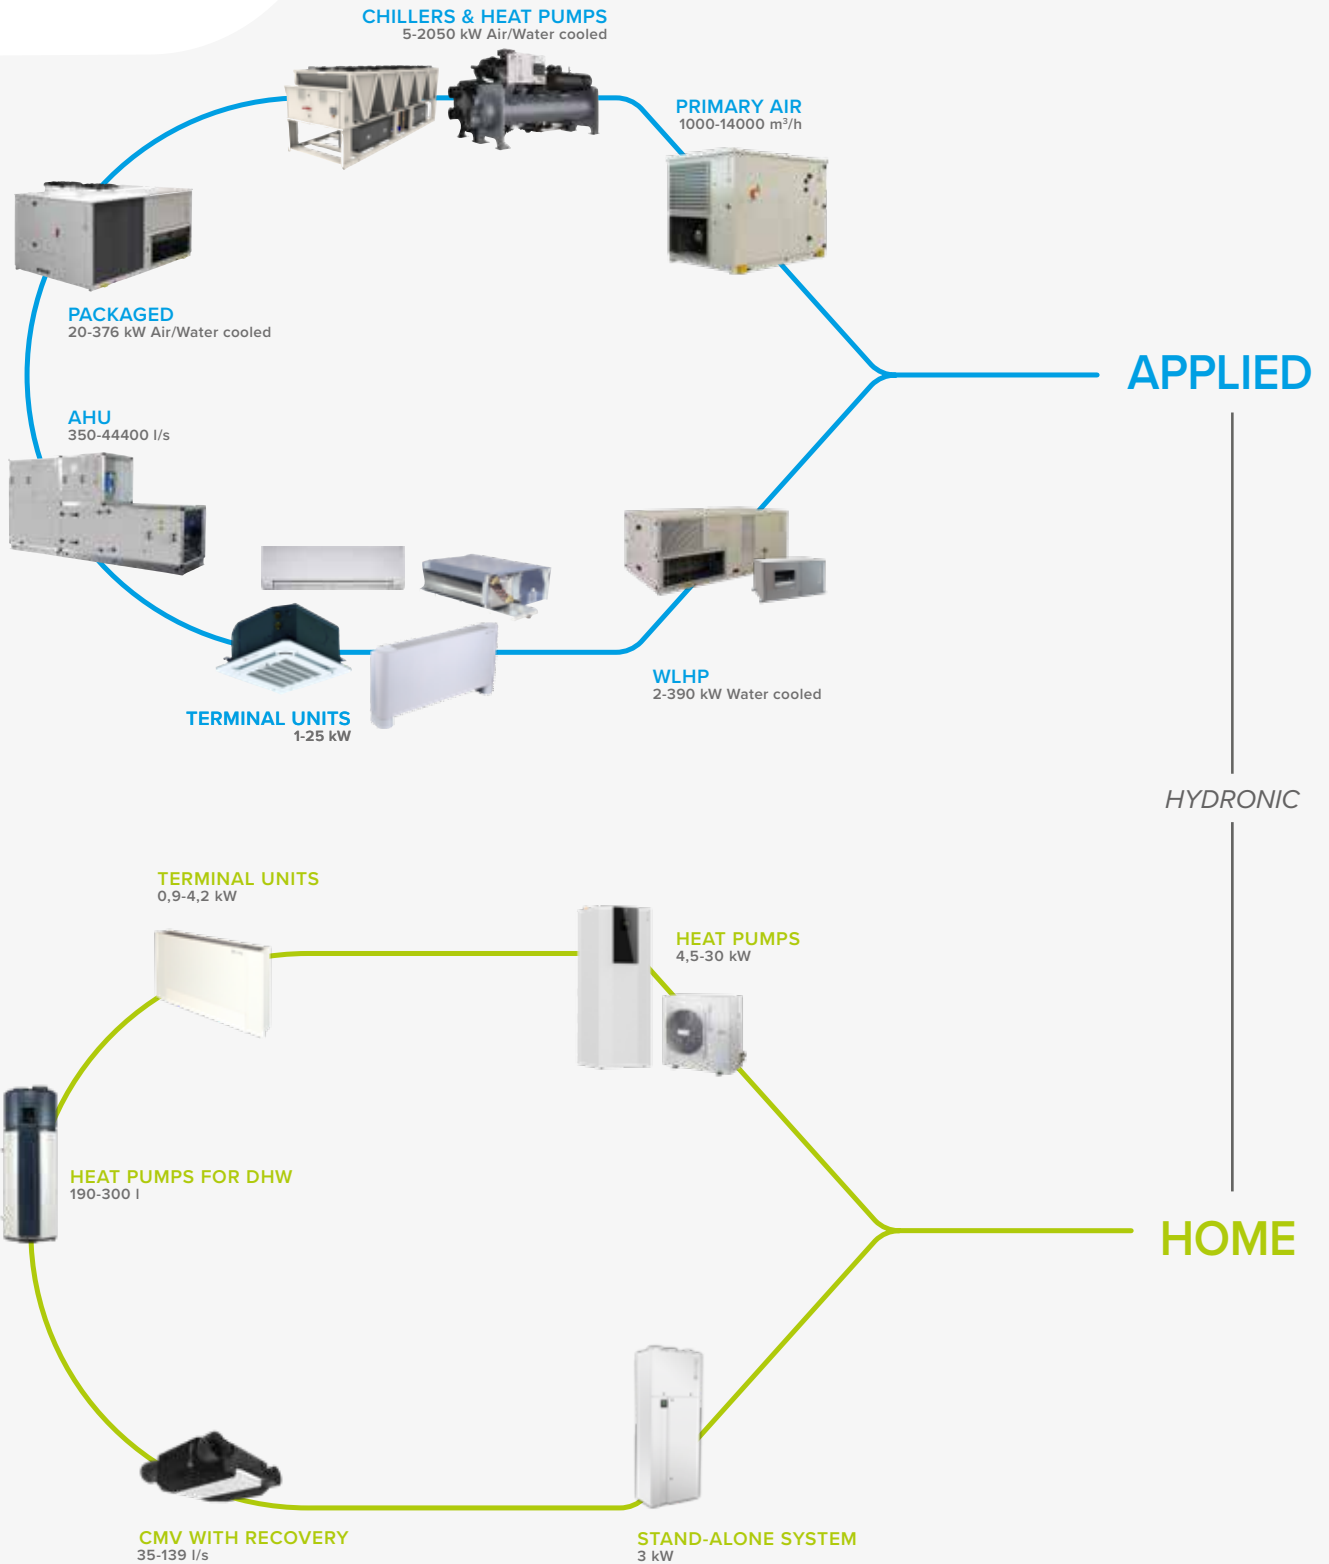


Heating, cooling, air renewal and domestic hot water production

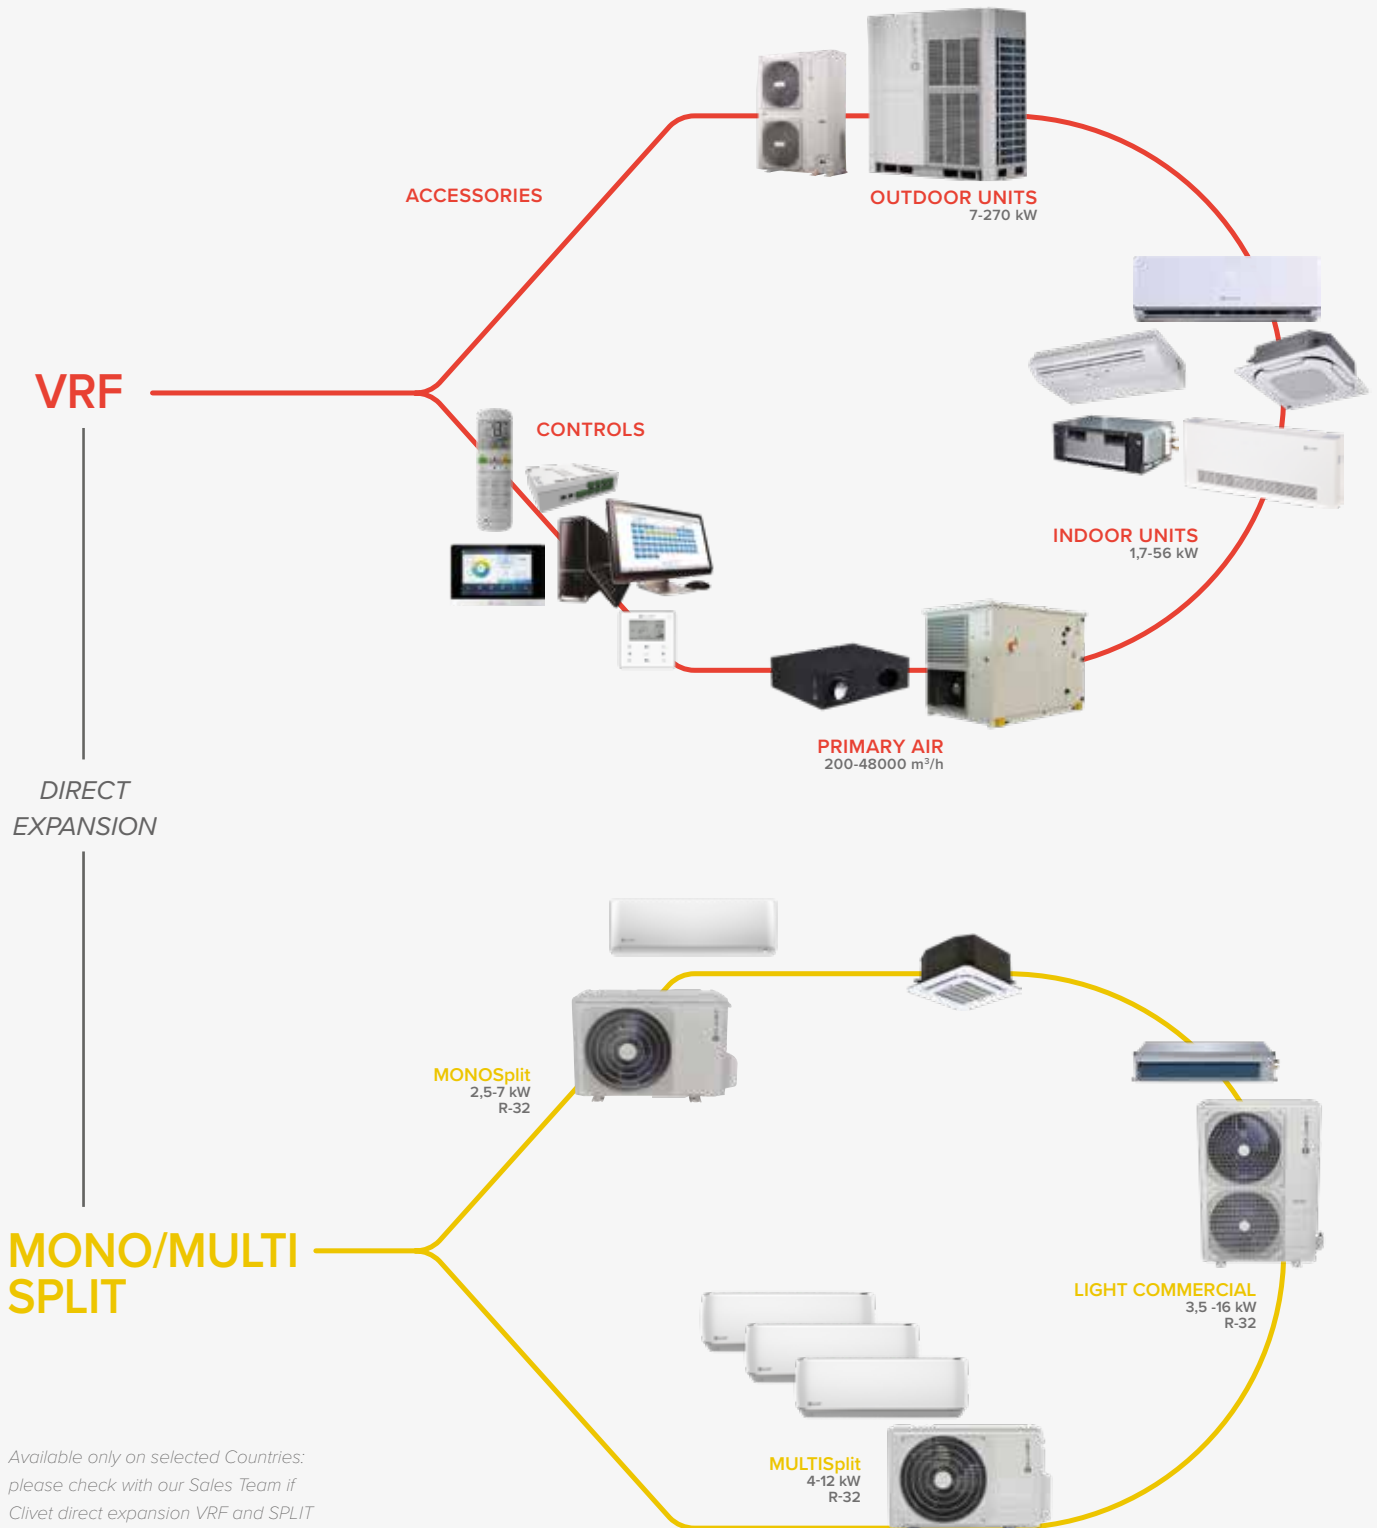

Available only on selected Countries:
please check with our Sales Team if
Clivet direct expansion VRF and SPLIT
Systems are available in your Country.



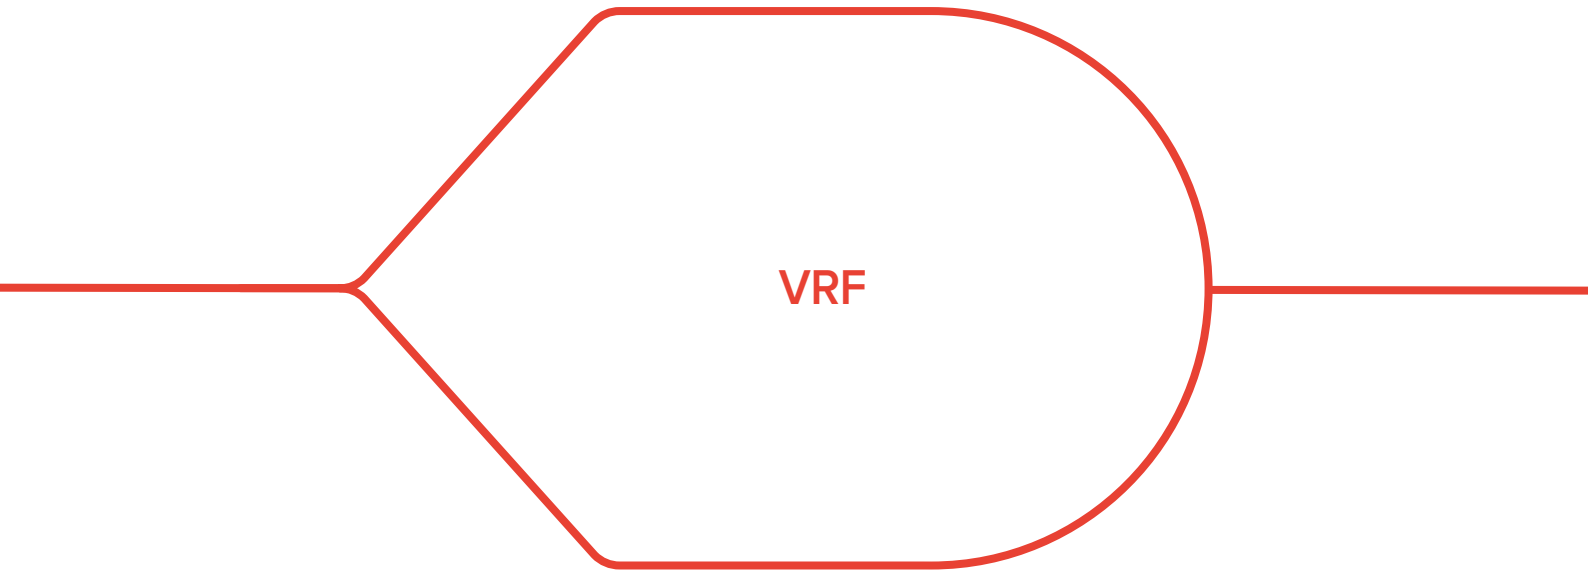







OUTDOOR Units - Product Lineup

HP

OUTDOOR UNITS

Source	Operation	Name	Series	Supply	Combin	3	4	4,5	5	6	6,5	7	8	10	12	14	16	18	20	22	24	26
	Heat Pump	Mini VRF 	MSAN-XMi	Single-phase (230/1/50)	1	●	●	●	●	●												
					Three-phase (400/3/50)	1				●	●	●	●	●	●				●	●		
	Heat Pump	VRF MV6 	MV6-XMi	Three-phase (400/3/50)	1									●	●	●	●	●	●	●	●	●
 Air						2÷3																
	Heat Pump	VRF MV6i 	MV6i-XMi	Three-phase (400/3/50)	1									●	●	●	●	●	●	●	●	●
	Heat Recovery	VRF MV6R 	MV6R-XMi	Three-phase (400/3/50)	1									●	●	●	●	●				
						2÷3																●
	Water Heat Pump	VRF MW 	MW-XMi	Three-phase (400/3/50)	1									●	●	●						
						2÷3																●

OUTDOOR Units - Overview of functions

Mini VRF







Air



Heat pump

	Source	
	Type	
Configuration and operation	Combination of multiple modules	-
	Simultaneous heating and cooling operation	-
Efficiency and technology	Inverter compressor	✓
	EVI compressor (enhanced vapor injection)	-
	Cooling up to -15°C outdoor air temperature	✓ ¹
	Heating up to -25°C outdoor air temperature	-
	Energy management system - floating refrigerant temperature	-
	Energy management system - capacity output limitation for shortage of electricity	-
Comfort	Night silent mode	✓ ²
	Silent mode + Super silent mode	-
	Smart defrosting	✓
	Continuous heating operation (alternating defrosting)	-
Reliability	Rotation between modules	-
	Backup operation in case of failure	-
	Refrigerant-cooled PCB with double U circuit	-
	Refrigerant leak detection function	-
Installation and maintenance	Auto Addressing	✓
	Adjustable ESP fan motor	-
	Input/output contacts on outdoor unit	-
	Automatic refrigerant charging	-
	Auto snow-blowing and dust-clean function	-

VRF MV6	VRF MV6i	VRF MV6R	VRF MW
			
 Air	 Air	 Air	 Water
 Heat pump	 Heat pump	 Heat recovery	 Heat pump
✓	-	✓	✓
-	-	✓	-
✓	✓	✓	✓
✓	✓	✓	-
✓	✓	✓ ⁴	✓ ⁶
✓	✓	✓	✓ ⁶
✓	✓	✓	-
✓	✓	✓	-
40 %-100 %	40 %-100 %	✓	-
✓	✓	✓	-
✓	✓	✓	-
✓	✓	✓	✓ ⁷
-	-	✓ ⁵	✓ ⁷
✓	-	✓	✓
✓	✓ ³	✓	-
✓	✓	✓	-
-	-	✓ ⁴	-
✓	✓	✓	✓
✓	✓	✓	-
0Pa-40Pa	0Pa-40Pa	0Pa-80Pa	-
✓ I: mode switch O: alarm	✓ I: mode switch O: alarm	✓ I: off emergency O: alarm	-
✓	-	✓	-
✓	-	✓	-


1. sizes 80M-260T
 2. sizes 400T-450T
 3. for units with 2 compressors
 4. in combination with single MS box MS01

5. in multiple modules configuration
 6. operating range independent of external conditions
 7. defrosting not necessary for water-source units

MINI VRF

MSAN-XMi 80M÷450T



OUTDOOR UNITS

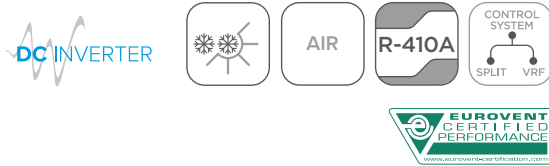

Compact design heat pump outdoor units


High efficiency

HIGH EER AND COP VALUES

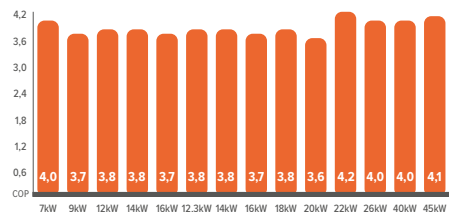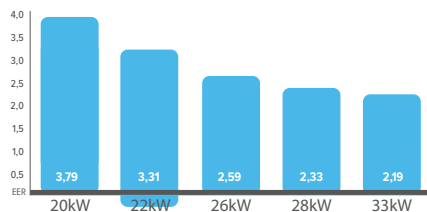

ALL DC INVERTER COMPRESSORS

The DC inverter compressor adopts innovative design and numerous high performance key parts which can reduce power consumption by 25%.



Compressor (Twin Rotary) structure

- Highly Efficient DC Motor:
 - Creative motor core design
 - High density neodymium magnet
 - Concentrated type stator
 - Wider operating frequency range

2. Better balance and Extremely Low Vibration:


- Twin eccentric cams
- 2 balance weights

3. Highly Stable Moving Parts:

- Optimal material matching rollers and vanes
- Optimize compressor drive technology
- Highly robust bearings
- Compact structure

HIGH EFFICIENCY HEAT EXCHANGER

Newly designed window type fins enlarge the heat exchange area and decrease air resistance, enhance heat exchange performance and save more energy. Hydrophilic fins and internally threaded copper pipes optimize heat exchange efficiency.



NEW GRILL DESIGN

Optimally designed fan shape and newly designed grill ensure both safety and air volume.




Newly designed grill



Powerful Large Propeller

ALL DC FAN MOTORS

Fan speed is controlled according to the system pressure and system load, minimizing energy consumption.

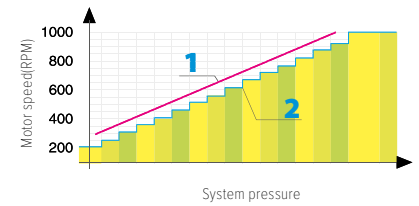

1. DC inverter stepless adjustment
2. AC inverter multistep adjustment

Wide application range

WIDE CAPACITY RANGE

The outdoor units' capacity range from 7,2 kW to 45 kW which is ideal for small offices, villas, apartment and shops, making it perfect for commercial and residential application.




WIDE RANGE OF INDOOR UNITS

Clivet provides 14 types and more than 100 models of VRF indoor units to meet varied customer requirements in a wide range of locations including shopping malls, hospitals, office buildings, hotels and airports.




WIDE OPERATION RANGE

Mini VRF Series operates stably under extreme conditions, ranging from -15°C to +46°C (200T/260T sizes)



LONG PIPING LENGTH

The Mini VRF provides a total piping length possibility of 250 m, a maximum height difference between outdoor and indoor units of 30 m. The height difference between indoor units can be up to 8 m. These generous allowances facilitate an extensive array of system designs.



- (1) Longest actual piping length
- (2) Level difference between indoor units and outdoor units
- (3) Level difference between indoor units

Permitted value


			80M	105M	120M	140M	160M	120T	140T	160T	180T	200T	224T	260T	400T	450T	
Piping length	Total piping length	Actual length	m	100	100	100	100	100	100	100	100	120	120	120	250	250	
	Longest piping	Actual length	m	45	45	60	60	60	60	60	60	60	60	60	60	100	100
		Equivalent length	m	50	50	70	70	70	70	70	70	70	70	70	70	120	120
Height difference	Longest length after first branch		m	20	20	20	20	20	20	20	20	20	20	20	40	40	
	Height difference between indoor and outdoor units	Outdoor unit up	m	30	30	30	30	30	30	30	30	30	30	30	30	30	30
		Outdoor unit down	m	20	20	20	20	20	20	20	20	20	20	20	20	20	20
	Height difference between indoor units		m	8	8	8	8	8	8	8	8	8	8	8	8	8	

Easy installation and service

EASY INSTALLATION

Easy installation: No special area is required for outdoor units.
Easy transportation: All outdoor units can be transported by elevator, which greatly simplifies installation and reduces time and labor.

The Mini VRF system's indoor and outdoor units are almost as easy to install as residential airconditioning systems, making them ideal for small offices and shops.

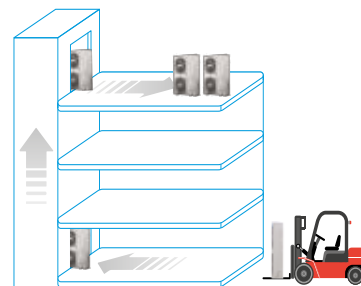

SPACE SAVING DESIGN



The Mini VRF units are slimmer and more compact, resulting in significant savings in installation space.


In some large residential and light commercial areas, such as villas, restaurants, usually it need more than one indoor unit, which in turn requires multiple outdoor units.

AUTO ADDRESSING

Outdoor unit can distribute addresses for indoor units automatically.
Wireless and wired controllers can query and modify each indoor unit's address.



FOUR-WAY PIPING CONNECTION




A four-direction space is available for connecting pipes and wiring in various installation sites.

HEADER CONNECTION AVAILABLE THROUGH BRANCH BOX

Easier and safer installation thanks to a branch box that simplifies piping work and the adoption of screw connection.
Both left and right pipe flare connections from outdoor unit to branch box are dedicated, which greatly simplifies field installation.



Branch Box FQT4-01

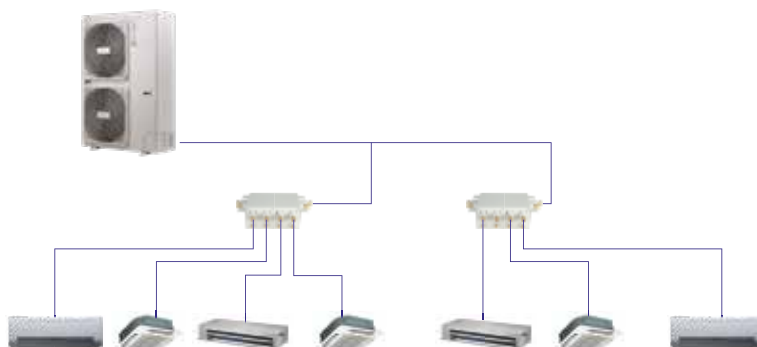

*compatible up to size 180T. For the whole Mini VRF series it is however possible to use the manifolds 4 or 8 connections DXFQT4-01 / DXFQT8-01.



Mini VRF

Size	MSAN-XMi	80M	105M	120M	140M	160M	
Capacity	HP	3	4	4,5	5	6	
Cooling ⁽¹⁾	Capacity	kW	7,2	9,0	12,3	14,0	15,5
	Power input	kW	1,85	2,54	3,25	3,85	4,39
	EER	-	3,90	3,55	3,78	3,64	3,53
	SEER	-	5,30	5,60	5,60	5,90	6,00
	η _{s,c}	%	-	-	221	233	237
Operating temperature range (DB)		°C	-15 ~ 43	-15 ~ 43	-15 ~ 43	-15 ~ 43	-15 ~ 43
Heating ⁽²⁾	Capacity	kW	7,2	9,0	13,2	15,4	17,0
	Power input	kW	1,79	2,43	3,47	4,05	4,58
	COP	-	4,02	3,71	3,80	3,80	3,71
	SCOP	-	3,90	3,80	4,05	4,00	3,70
	η _{s,h}	%	-	-	159	157	145
Operating temperature range (DB)		°C	-15 ~ 27	-15 ~ 27	-15 ~ 27	-15 ~ 27	-15 ~ 27
Connectable indoor units	Total Capacity Index ⁽³⁾	-	45~130 %	45~130 %	45~130 %	45~130 %	45~130 %
	Max quantity	-	4	5	6	6	7
Compressor	Type ⁽⁴⁾	-	ROT	ROT	ROT	ROT	ROT
	Quantity	-	1	1	1	1	1
Refrigerant	Factory charge	kg	2,95	2,95	3,3	3,9	3,9
	CO ₂ equivalence	tonne	6,16	6,16	6,89	8,14	8,14
Pipe connections	Liquid pipe	mm	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52
	Gas pipe	mm	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 19,1
Dimensions (Width x Height x Depth)		mm	1075x966x396	1075x966x396	900x1327x400	900x1327x400	900x1327x400
Weight		kg	75,5	75,5	95	95	100
Fan number		-	1	1	2	2	2
Air flow rate		m ³ /h	5 500	5 500	6 000	6 000	6 000
Sound pressure level ⁽⁵⁾		dB(A)	56	57	57	57	57
Sound power level ⁽⁵⁾		dB(A)	67	68	72	73	73
Power supply		V/Ph/Hz	230/1/50				

OUTDOOR UNITS



Mini VRF

Size	MSAN-XMi	120T	140T	160T	180T	200T	224T	260T	400T	450T	
Capacity	HP	4,5	5	6	6,5	7	8	10	14	16	
Cooling ⁽¹⁾	Capacity	kW	12,3	14	15,5	17,5	20	22,4	26	40	45
	Power input	kW	3,25	3,85	4,39	5,47	6,35	6,81	8,13	15,09	13,55
	EER	-	3,78	3,64	3,53	3,20	3,15	3,29	3,20	2,65	3,32
	SEER	-	5,60	5,90	6,00	5,50	5,80	5,90	5,70	5,70	5,55
	η _{s,c}	%	221	233	237	217	229	233	225	225	219
Operating temperature range (DB)		°C	-15 ~ 43	-15 ~ 43	-15 ~ 43	-15 ~ 43	-15 ~ 46	-15 ~ 46	-15 ~ 46	-5 ~ 48	-5 ~ 48
Heating ⁽²⁾	Capacity	kW	13,2	15,4	17	19	22	24,5	28,5	40	45
	Power input	kW	3,47	4,05	4,58	5,00	6,20	5,90	7,22	10,00	11,11
	COP	-	3,80	3,80	3,71	3,80	3,55	4,15	3,95	4,00	4,05
	SCOP	-	4,05	4,00	3,70	4,10	3,75	3,90	4,00	3,75	3,70
	η _{s,h}	%	159	157	145	161	147	153	157	147	145
Operating temperature range (DB)		°C	-15 ~ 27	-15 ~ 27	-15 ~ 27	-15 ~ 27	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	45~130 %	45~130 %	45~130 %	45~130 %	50~130 %	50~130 %	50~130 %	50~130 %	50~130 %
	Max quantity	-	6	6	7	9	10	11	12	14	15
Compressor	Type ⁽⁴⁾	-	ROT	ROT	ROT	ROT	ROT	ROT	ROT	ROT	
	Quantity	-	1	1	1	1	1	1	1	2	2
Refrigerant	Factory charge	kg	3,3	3,9	3,9	4,5	4,8	6,2	6,2	9	12
	CO ₂ equivalence	tonne	6,89	8,14	8,14	9,4	10,02	12,95	12,95	18,79	25,06
Pipe connections	Liquid pipe	mm	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52	Ø 9,52	Ø 12,7	Ø 12,7
	Gas pipe	mm	Ø 15,9	Ø 15,9	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 22,2	Ø 22,2	Ø 25,4
Dimensions (Width x Height x Depth)		mm	900x1327x400	900x1327x400	900x1327x400	900x1327x400	1120x1558x528	1120x1558x528	1120x1558x528	1360x1650x540	1460x1650x540
Weight		kg	95	95	102	107	137	146,5	147	240	275
Fan number		-	2	2	2	2	2	2	2	2	
Air flow rate		m ³ /h	6 000	6 000	6 000	6 800	10 999	10 494	10 494	16 575	16 575
Sound pressure level ⁽⁵⁾		dB(A)	57	57	57	59	59	59	60	62	62
Sound power level ⁽⁵⁾		dB(A)	72	73	73	74	76	76	77	82	83
Power supply		V/Ph/Hz	400/3/50+N								

EER and COP according EN 14511 regulation, SEER and SCOP according EN14825 regulation

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoortemperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(4) ROT = rotary compressor

(5) Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1m above the floor.

VRF MV6

MV6-XMi 252T÷2700T

OUTDOOR UNITS



Very high efficiency heat pump outdoor units



3 Unique Innovations

EVI (ENHANCED VAPOR INJECTION) COMPRESSOR

Thanks to the vapor injection DC inverter compressor, the MV6 series can run heating mode stably down to -25°C , furthermore strongly increasing the heating capacity especially at low ambient temperature. Compressor is designed to run at 7% modulation minimum, highly improving system efficiency at part load operation.




Vapor injection DC inverter compressor

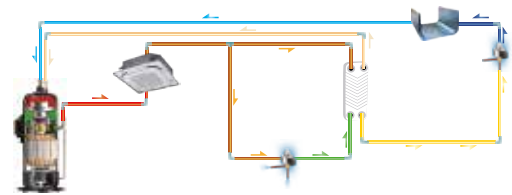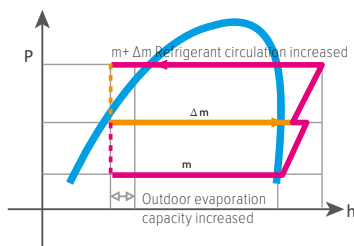

EMS (ENERGY MANAGEMENT SYSTEM)


Floating refrigerant temperature for balancing comfort and efficiency

The evaporating temperature (in cooling) and condensing temperature (in heating) are automatically adjusted according to both indoor and outdoor temperature to maximize the comfort and energy efficiency.

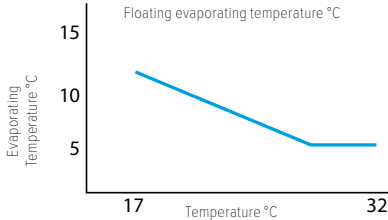

Capacity output limitation for shortage of electricity

With the integration of EMS, for projects with limited electricity supply, MV6 can be set to output 40-100% capacity.

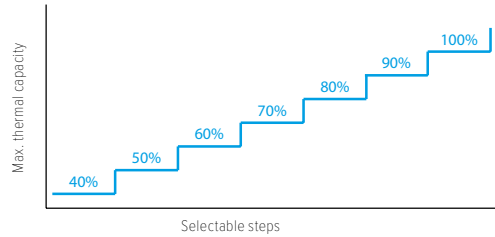

MR. DOCTOR



Force cooling /heating commissioning: force cooling or force heating operation can check the system comprehensively and quickly.



Self-diagnosis: all new diagnosis software to monitor all operating parameters and detailed information.



Automatic data backup: automatic data backup of last 30 minute's operation record.




Auxiliary PCB for quick access: placed on side column of the unit, it provides easy access to LED display and main settings without removing the front panel.

High Efficiency

PHE (PLATE HEAT EXCHANGER) SUBCOOLING

Plate Heat Exchanger as a secondary intercooler boosts up refrigerant subcooling and improves 10% energy efficiency.

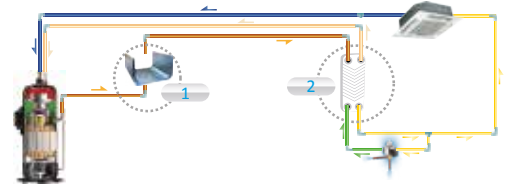

HIGH EFFICIENCY G-TYPE HEAT EXCHANGER

24-32HP units use high efficiency 3-rows G-type heat exchanger which heat exchange area is 1,5 times than 22HP unit. The 24-32HP units also use super big size fan which diameter is up to 750mm.





3-rows G-type heat exchanger



Super big size fan

HIGH EER AND COP VALUES

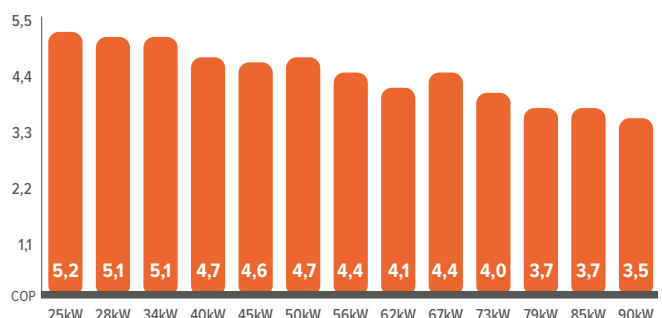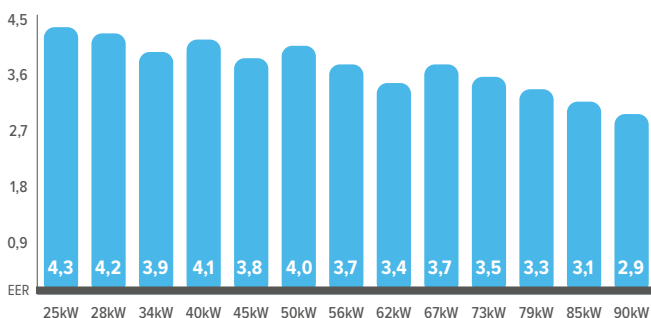


Wide Application Range


WIDE CAPACITY RANGE

The whole lineup of VRF MV6 is from 8HP to 96HP in 2HP increasement with the world's largest single refrigerant system capacity up to 96HP.

OUTDOOR UNITS

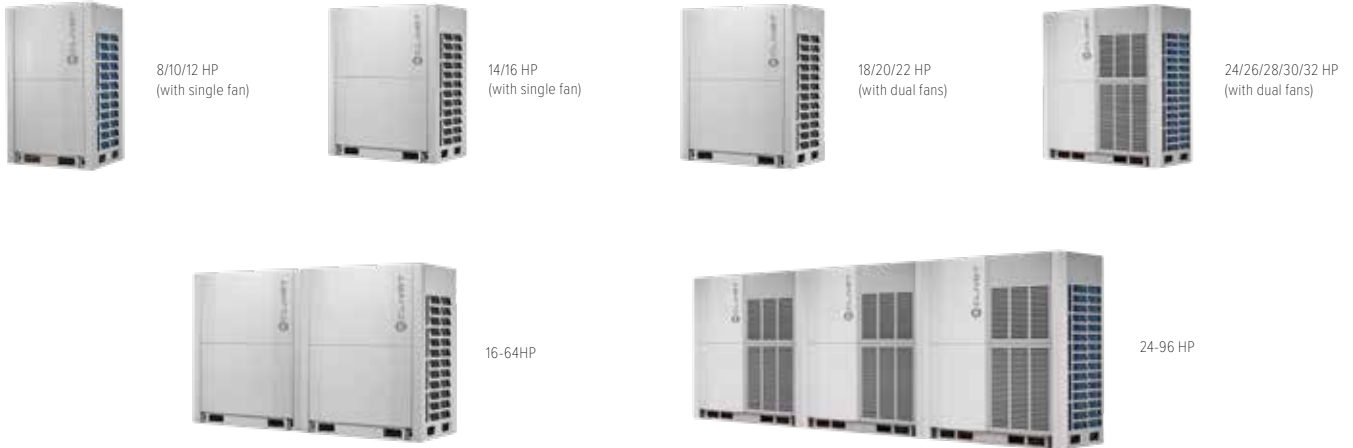

LONG PIPING CAPABILITY



- (1) Longest actual piping length
- (2) Level difference between indoor units and outdoor units
- (3) Level difference between indoor units


Piping length

	Capability
Total piping length	1000 m
Longest length - actual (equivalent)	175 m (200 m)
Longest length after first branch	90 m*
Largest height difference between indoor and outdoor units - ODU up (down)	90 m (110 m)
Largest height difference between indoor units	30 m

* The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please refer to technical manual for further information.

WIDE OPERATION RANGE

VRF MV6 can operate in a wide ambient temperature range. It can operate stably from -15°C up to 48°C in cooling mode and from -25°C to 24°C in heating mode.




High Reliability

PRECISE OIL CONTROL TECHNOLOGY

Four stages of oil control technology ensure all outdoor compressor oil is always kept at a safe level, eliminating any compressor oil shortage problems.

- (1) Compressor internal oil separation.
- (2) High-efficiency centrifugal oil separator (with separation efficiency of up to 99%) ensures that oil is separated from the discharge gas and returned to the compressors in a timely fashion.
- (3) Oil balance pipes between compressors ensure even oil distribution to keep compressors running normally.
- (4) Auto oil return program monitors the running time and system status to ensure reliable oil return.

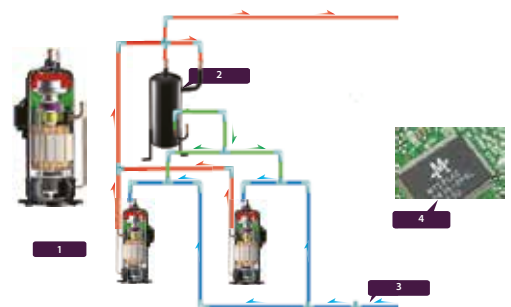


DUTY CYCLING

Duty cycling equalizes the running time of the outdoor units in a multiple-unit system and of the compressors in each unit, significantly extending compressor lifespan.



BACKUP OPERATION

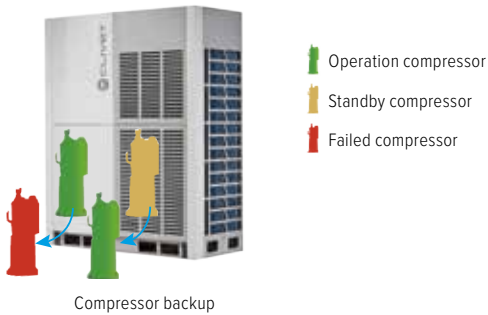

In one unit with two compressors, if one compressor is failed, the other compressor can be backup instead of the failed one to maintain up to 4 days interim capacity, allowing time for maintenance or repair while comfort remains guaranteed.

In a multi-unit system, if one module fails, the other modules provide backup so that the system can continue operating.

ANTI-CORROSION PROTECTION

Outdoor units are given anti-corrosion treatment for non-extreme conditions as standard and can also be customized with heavy anti-corrosion treatment on main components for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life. The integrity of the anti-corrosion treatment is ensured by subjecting major components and parts to salt mist testing, moisture and heating testing and light aging testing.


Please contact your local dealer for further information about customization price and availability.

- Fan motor
- Painted sheet metal
- Screws / Bolts / Gaskets
- Heat exchanger aluminum foil
- Heat exchanger copper pipe
- Electric Control Box Case



REFRIGERANT COOLING PCB

The MV6 series uses refrigerant cooling technology to cool the electric control box. It decreases the average temperature of electrical control components by about 8 degrees, guaranteeing the stable and safe running of the control system.



AUTO SNOW-BLOWING FUNCTION

The innovatively designed auto snow-blowing function enables the outdoor unit to prevent the accumulation of snow by itself.



DUST-CLEAN FUNCTION


The innovatively designed dust-clean function enables the outdoor unit to prevent the dust by itself.



Enhanced Comfort


NIGHT SILENT MODE

The night silent mode feature includes various scheduling options that can be used to reduce noise levels when low noise operation is required: only during night hours or continuously, and with different noise reductions levels limiting only maximum fan speed or compressor speed also.

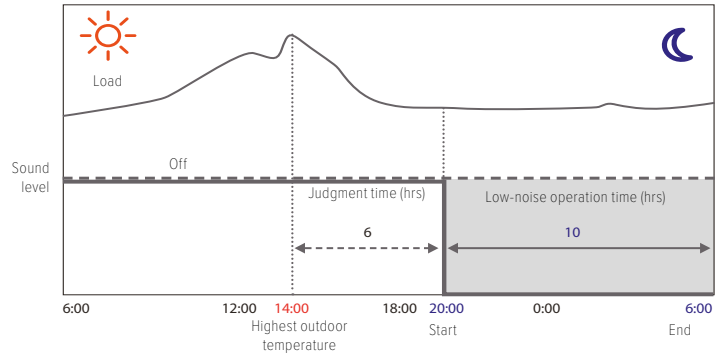


ENHANCED HEATING CAPACITY

Thanks to the vapour injection DC Inverter compressors, heating capacity can achieve 100% output when the ambient temperature is down to -5°C and 90% output when ambient temperature is down to -15°C .

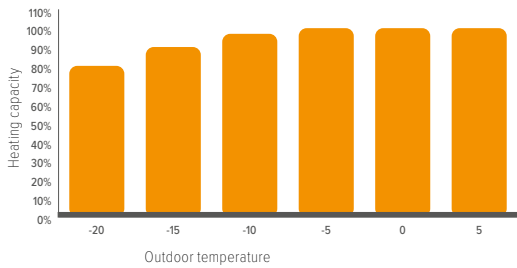

INTELLIGENT DEFROSTING TECHNOLOGY

The intelligent defrosting program calculates the time required for defrosting according to the actual system status, eliminating heat losses from unnecessary defrosting. A specialized defrosting valve reduces time required for defrosting to as little as four minutes.

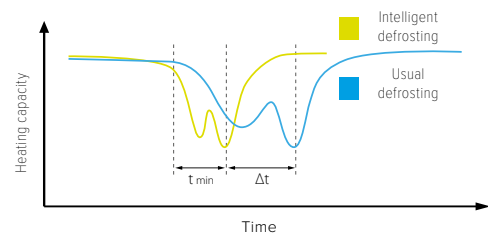

MULTIPLE PRIORITY MODE SETTINGS AVAILABLE

Operating mode priority can be set among different modes (automatic, cooling priority, VIP indoor unit, heating only, cooling only) to satisfy every specific user's need. Setting can be performed on outdoor unit directly or by centralized controller.


SMART INPUT/OUTPUT CONTACTS

Convenient connectors are available as standard on unit PCB, to realize some convenient operations on field with other building appliances depending on users' needs. Available contacts are heating/cooling switch as input and alarm as output.

Easy Installation and Service


AUTO ADDRESSING

Outdoor unit can distribute addresses to indoor units automatically. Remote and wired controllers can be used to query or modify each indoor unit's address.

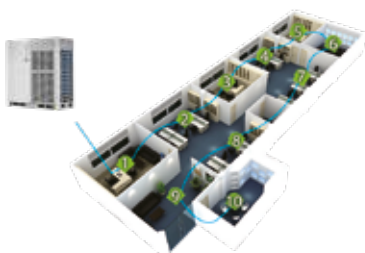

AUTOMATIC REFRIGERANT CHARGING FUNCTION

Automatic refrigerant charging function make the installation and service easier and more efficient, automatically collecting refrigerant from the tank and stopping the operation when exact refrigerant charge is done.

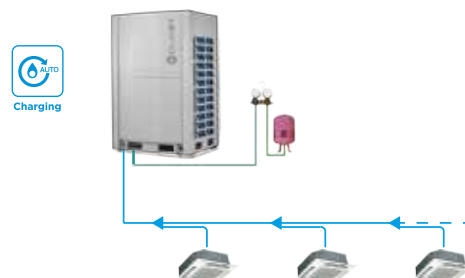



VRF MV6

Size		MV6-XMi	252T	280T	335T	400T	450T	500T	560T	615T
Capacity	HP		8	10	12	14	16	18	20	22
	Capacity	kW	25,2	28	33,5	40	45	50	56	61,5
Cooling ⁽¹⁾	Power input	kW	5,93	6,75	8,7	9,9	12,0	12,5	15,1	18,4
	EER	-	4,25	4,15	3,85	4,05	3,75	4,00	3,70	3,35
	SEER	-	7,70	7,54	7,28	6,22	5,98	6,85	6,54	6,35
	η _{s,c}	%	305	298,6	288,2	245,8	236,2	271	258,6	251
	Operating temperature range (DB)	°C	-15~48	-15~48	-15~48	-15~48	-15~48	-15~48	-15~48	-15~48
Heating ⁽²⁾	Capacity	kW	25,2	28	33,5	40	45	50	56	61,5
	Power input	kW	4,82	5,46	6,6	8,5	9,8	10,6	12,7	15,0
	COP	-	5,23	5,13	5,10	4,70	4,60	4,70	4,40	4,10
	SCOP	-	4,11	4,11	4,51	4,31	4,31	3,80	3,80	3,80
	η _{s,h}	%	161,4	161,4	177,4	169,4	169,4	149	149	149
Operating temperature range (DB)	°C	-25~24	-25~24	-25~24	-25~24	-25~24	-25~24	-25~24	-25~24	-25~24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	13	16	20	23	26	29	33	36
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	1	1	1	1	1	2	2	2
Refrigerant	Factory charge	kg	11	11	11	13	13	17	17	17
	CO ₂ equivalence	tonne	22,97	22,97	22,97	27,14	27,14	35,5	35,5	35,5
Pipe connections	Liquid pipe	mm	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 19,1	Ø 19,1	Ø 19,1
	Gas pipe	mm	Ø 25,4	Ø 25,4	Ø 28,6	Ø 31,8	Ø 31,8	Ø 31,8	Ø 31,8	Ø 31,8
Fan motors	Quantity	-	1	1	1	1	1	2	2	2
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	mm	990x1635x790	990x1635x790	990x1635x790	1340x1635x850	1340x1635x850	1340x1635x825	1340x1635x825	1340x1635x825	1340x1635x825
Weight	kg	227	227	227	277	277	348	348	348	348
Air flow rate	m ³ /h	11 000	11 000	11 000	13 000	13 000	17 000	17 000	17 000	17 000
Sound pressure level ⁽⁴⁾	dB(A)	58	58	60	62	65	65	66	66	66
Sound power level ⁽⁴⁾	dB(A)	78	78	81	85	88	88	88	88	88
Power supply	V/Ph/Hz						380-415/3/50+N			

OUTDOOR UNITS



VRF MV6

Size		MV6-XMi	670T	730T	785T	850T	900T
Capacity	HP		24	26	28	30	32
	Capacity	kW	67	73	78,5	85	90
Cooling ⁽¹⁾	Power input	kW	18,1	20,9	24,2	27,4	31,0
	EER	-	3,70	3,49	3,25	3,10	2,90
	SEER	-	7,00	6,51	6,22	6,10	5,90
	η _{s,c}	%	277	257,4	245,8	241	233
	Operating temperature range (DB)	°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	67	73	78,5	85	90
	Power input	kW	15,33	18,11	21,16	22,91	25,7
	COP	-	4,37	4,03	3,71	3,71	3,50
	SCOP	-	3,86	3,86	3,86	3,84	3,84
	η _{s,h}	%	151,4	151,4	151,4	150,6	150,6
Operating temperature range (DB)	°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	39	43	46	50	53
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	2	2	2	2	2
Refrigerant	Factory charge	kg	22	22	22	25	25
	CO ₂ equivalence	tonne	45,94	45,94	45,94	52,2	52,2
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2
	Gas pipe	mm	Ø 31,8	Ø 31,8	Ø 31,8	Ø 38,1	Ø 38,1
Fan motors	Quantity	-	2	2	2	2	2
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	
Weight	kg	430	430	430	475	475	
Air flow rate	m ³ /h	25 000	25 000	25 000	24 000	24 000	
Sound pressure level ⁽⁴⁾	dB(A)	67	68	68	68	68	
Sound power level ⁽⁴⁾	dB(A)	89	90	90	90	90	
Power supply	V/Ph/Hz				380-415/3/50+N		

EER and COP according EN 14511 regulation, SEER and SCOP according EN14825 regulation

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(4) Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1,3 m above the floor.

(2) Indoortemperature 20°CDB/15°CWB; Outdoortemperature 7°CDB/6°CWB. Interconnecting piping length is 7,5 m, level difference is zero.



VRF MV6

Size		MV6-XMi	950T	1015T	1065T	1120T	1175T	1230T	1285T	1345T
Capacity		HP	34	36	38	40	42	44	46	48
Combination		HP	12+22	14+22	16+22	12+28	20+22	22+22	22+24	22+26
Cooling ⁽¹⁾	Capacity	kW	95,0	101,5	106,5	112,0	117,5	123,0	128,5	134,5
	Power input	kW	27,1	28,1	30,4	32,9	33,5	36,7	36,5	39,3
	EER	-	3,51	3,59	3,51	3,41	3,51	3,35	3,52	3,43
	Operating temperature range (DB)	°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	95,0	101,5	106,5	112,0	117,5	123,0	128,5	134,5
	Power input	kW	21,6	23,5	24,8	27,7	33,5	36,7	30,43	33,21
	COP	-	4,40	4,32	4,30	4,04	4,24	4,10	4,22	4,05
	Operating temperature range (DB)	°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	56	59	63	63	64	64	64	64
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	3	3	3	3	4	4	4	4
Refrigerant	Factory charge	kg	28	30	30	33	34	34	39	39
	CO ₂ equivalence	tonne	58,46	62,64	62,64	68,9	70,99	70,99	81,43	81,43
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1
	Gas pipe	mm	Ø 31,8	Ø 38,1	Ø 38,1	Ø 38,1	Ø 38,1	Ø 38,1	Ø 38,1	Ø 38,1
Fan motors	Quantity	-	3	3	3	3	4	4	4	4
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	Unit 1	mm	990x1635x790	1340x1635x850	1340x1635x850	990x1635x790	1340x1635x825	1340x1635x825	1340x1635x825	1340x1635x825
	Unit 2	mm	1340x1635x825	1340x1635x825	1340x1635x825	1730x1830x850	1340x1635x825	1340x1635x825	1730x1830x850	1730x1830x850
Weight		kg	575	625	625	707	696	696	778	778
Air flow rate		m ³ /h	28 000	30 000	30 000	36 000	34 000	34 000	42 000	42 000
Sound pressure level ⁽⁴⁾		dB(A)	69	69	69	69	70	70	70	70
Sound power level ⁽⁴⁾		dB(A)	91	91	91	91	92	92	92	92
Power supply		V/Ph/Hz	380-415/3/50+N							



VRF MV6

Size		MV6-XMi	1400T	1460T	1515T	1570T	1635T	1685T	1750T	1800T
Capacity		HP	50	52	54	56	58	60	62	64
Combination		HP	22+28	26+26	26+28	28+28	28+30	28+32	30+32	32+32
Cooling ⁽¹⁾	Capacity	kW	140,0	146,0	151,5	157,0	163,5	168,5	175,0	180,0
	Power input	kW	42,5	41,8	45,1	48,3	51,6	55,2	58,5	62,1
	EER	-	3,29	3,49	3,36	3,25	3,17	3,05	2,99	2,90
	Operating temperature range (DB)	°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	140,0	146,0	151,5	157,0	163,5	168,5	175,0	180,0
	Power input	kW	36,2	36,22	39,3	42,3	44,1	46,9	48,7	51,4
	COP	-	3,87	4,03	3,86	3,71	3,70	3,59	3,59	3,50
	Operating temperature range (DB)	°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	64	64	64	64	64	64	64	64
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	4	4	4	4	4	4	4	4
Refrigerant	Factory charge	kg	39	44	44	44	47	47	50	50
	CO ₂ equivalence	tonne	81,43	91,87	91,87	91,87	98,14	98,14	104,4	104,4
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1
	Gas pipe	mm	Ø 38,1	Ø 38,1	Ø 38,1	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3
Fan motors	Quantity	-	4	4	4	4	4	4	4	4
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	Unit 1	mm	1340x1635x825	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
	Unit 2	mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
Weight		kg	778	860	860	860	905	905	950	950
Air flow rate		m ³ /h	42 000	50 000	50 000	50 000	49 000	49 000	48 000	48 000
Sound pressure level ⁽⁴⁾		dB(A)	70	70	70	70	70	70	70	70
Sound power level ⁽⁴⁾		dB(A)	92	92	92	92	92	92	92	92
Power supply		V/Ph/Hz	380-415/3/50+N							

EER and COP according EN 14511 regulation

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(4) Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1,3 m above the floor.



VRF MV6

Size		MVG-XMi	1850T	1915T	1965T	2020T	2075T	2130T	2185T	2245T
Capacity		HP	66	68	70	72	74	76	78	80
Combination		HP	12+22+32	14+22+32	16+22+32	12+28+32	20+22+32	22+22+32	22+24+32	22+26+32
Cooling ⁽¹⁾	Capacity	kW	185,0	191,5	196,5	202,0	207,5	213,0	218,5	224,5
	Power input	kW	58,1	59,3	61,4	63,9	64,5	67,8	67,5	70,3
	EER	-	3,18	3,23	3,20	3,16	3,22	3,14	3,24	3,19
	Operating temperature range (DB)	°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	185,0	191,5	196,5	202,0	207,5	213,0	218,5	224,5
	Power input	kW	47,3	49,2	50,5	53,4	53,4	55,7	56,13	58,91
	COP	-	3,91	3,89	3,89	3,78	3,88	3,82	3,89	3,81
	Operating temperature range (DB)	°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	64	64	64	64	64	64	64	64
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	5	5	5	5	6	6	6	6
Refrigerant	Factory charge	kg	53	55	55	58	59	59	64	64
	CO ₂ equivalence	tonne	110,66	114,84	114,84	121,1	123,19	123,19	133,63	133,63
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2
	Gas pipe	mm	Ø 41,3	Ø 44,5	Ø 44,5	Ø 44,5	Ø 44,5	Ø 44,5	Ø 44,5	Ø 44,5
Fan motors	Quantity	-	5	5	5	5	6	6	6	6
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	Unit 1	mm	990x1635x790	1340x1635x850	1340x1635x850	990x1635x790	1340x1635x825	1340x1635x825	1340x1635x825	1340x1635x825
	Unit 2	mm	1340x1635x825	1340x1635x825	1340x1635x825	1730x1830x850	1340x1635x825	1340x1635x825	1730x1830x850	1730x1830x850
	Unit 3	mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
Weight	kg	1050	1100	1100	1132	1171	1171	1253	1253	
Air flow rate	m ³ /h	52 000	54 000	54 000	60 000	58 000	58 000	66 000	66 000	
Sound pressure level ⁽⁴⁾	dB(A)	71	71	71	71	72	72	72	72	
Sound power level ⁽⁴⁾	dB(A)	93	93	93	93	94	94	94	94	
Power supply	V/Ph/Hz	380-415/3/50+N								



VRF MV6

Size		MVG-XMi	2300T	2360T	2415T	2470T	2535T	2585T	2650T	2700T
Capacity		HP	82	84	86	88	90	92	94	96
Combination		HP	22+28+32	26+26+32	26+28+32	28+28+32	28+30+32	28+32+32	30+32+32	32+32+32
Cooling ⁽¹⁾	Capacity	kW	230,0	236,0	241,5	247,0	253,5	258,5	265,0	270,0
	Power input	kW	73,5	72,8	76,1	79,3	82,6	86,2	89,5	93,1
	EER	-	3,13	3,24	3,17	3,11	3,07	3,00	2,96	2,90
	Operating temperature range (DB)	°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	230,0	236,0	241,5	247,0	253,5	258,5	265,0	270,0
	Power input	kW	61,9	61,92	65,0	68,0	69,8	72,6	74,4	77,1
	COP	-	3,72	3,81	3,72	3,63	3,63	3,56	3,56	3,50
	Operating temperature range (DB)	°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	64	64	64	64	64	64	64	64
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	6	6	6	6	6	6	6	6
Refrigerant	Factory charge	kg	64	69	69	69	72	72	75	75
	CO ₂ equivalence	tonne	133,63	144,07	144,07	144,07	150,34	150,34	156,6	156,6
Pipe connections	Liquid pipe	mm	Ø 22,2	Ø 25,4	Ø 25,4	Ø 25,4	Ø 25,4	Ø 25,4	Ø 25,4	Ø 25,4
	Gas pipe	mm	Ø 44,5	Ø 50,8	Ø 50,8	Ø 50,8	Ø 50,8	Ø 50,8	Ø 50,8	Ø 50,8
Fan motors	Quantity	-	6	6	6	6	6	6	6	6
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)	Unit 1	mm	1340x1635x825	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
	Unit 2	mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
	Unit 3	mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
Weight	kg	1253	1335	1335	1335	1380	1380	1425	1425	
Air flow rate	m ³ /h	66 000	74 000	74 000	74 000	73 000	73 000	72 000	72 000	
Sound pressure level ⁽⁴⁾	dB(A)	72	72	72	72	72	72	72	72	
Sound power level ⁽⁴⁾	dB(A)	94	94	94	94	94	94	94	94	
Power supply	V/Ph/Hz	380-415/3/50+N								

EER and COP according EN 14511 regulation

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.


(4) Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1,3 m above the floor.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

VRF MV6i

MV6i-XMi 252T÷900T

OUTDOOR UNITS

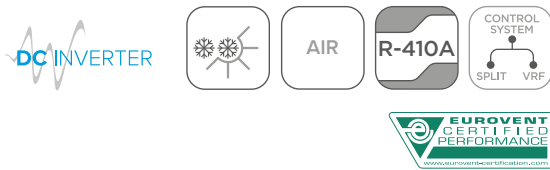

High efficiency heat pump outdoor units



3 Unique Innovations

EVI (ENHANCED VAPOR INJECTION) COMPRESSOR

Thanks to the vapor injection DC inverter compressor, the MV6i series can run heating mode stably down to -25°C , furthermore strongly increasing the heating capacity especially at low ambient temperature. Compressor is designed to run at 7% modulation minimum, highly improving system efficiency at part load operation.




Vapor injection
DC inverter compressor

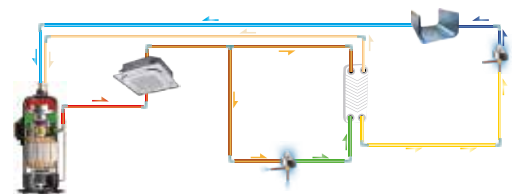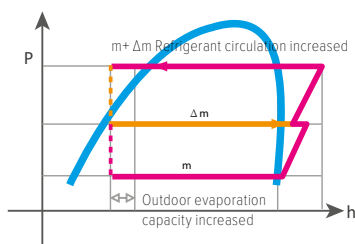

EMS (ENERGY MANAGEMENT SYSTEM)


Floating refrigerant temperature for balancing comfort and efficiency

The evaporating temperature (in cooling) and condensing temperature (in heating) are automatically adjusted according to both indoor and outdoor temperature to maximize the comfort and energy efficiency.

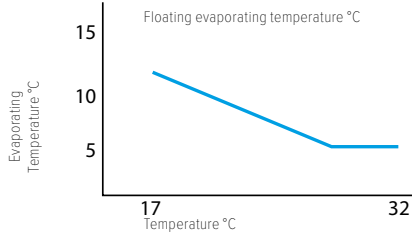

Capacity output limitation for shortage of electricity

With the integration of EMS, for projects with limited electricity supply, MV6 can be set to output 40-100% capacity.

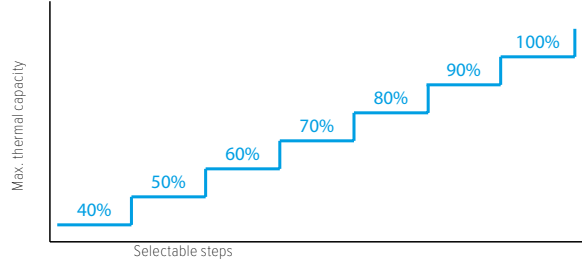

MR. DOCTOR



Force cooling /heating commissioning: force cooling or force heating operation can check the system comprehensively and quickly.




Self-diagnosis: all new diagnosis software to monitor all operating parameters and detailed information.

High Efficiency

PHE (PLATE HEAT EXCHANGER) SUBCOOLING

Plate Heat Exchanger as a secondary intercooler boosts up refrigerant subcooling and improves 10% energy efficiency.

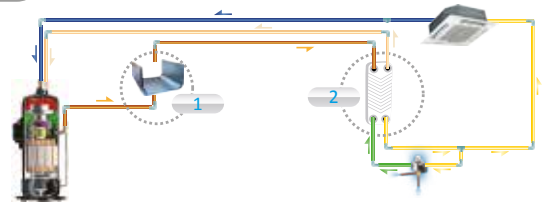

HIGH EFFICIENCY G-TYPE HEAT EXCHANGER

24-32HP units use high efficiency 3-rows G-type heat exchanger which heat exchange area is 1,5 times than 22HP unit. The 24-32HP units also use super big size fan which diameter is up to 750mm.





3-rows G-type heat exchanger



Super big size fan

HIGH EER AND COP VALUES

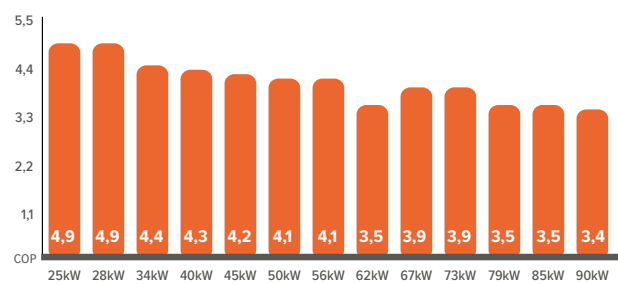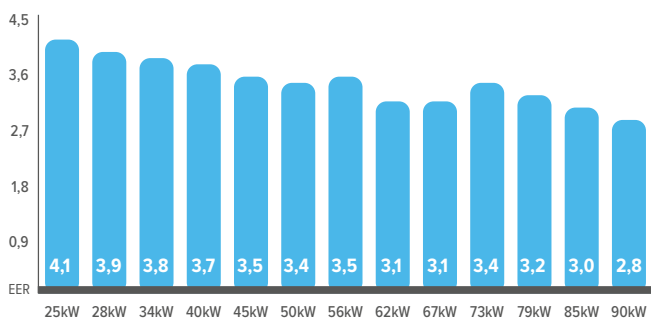

Wide Application Range

WIDE CAPACITY RANGE

VRF MV6i series has been designed for single module installation, with a capacity ranging from 8 HP to 32 HP.



8/10/12 HP
(with single fan)



14/16/18 HP
(with single fan)




20/22 HP
(with dual fans)



24/26/28/30/32 HP
(with dual fans)

OUTDOOR UNITS

LONG PIPING CAPABILITY



- (1) Longest actual piping length
- (2) Level difference between indoor units and outdoor units
- (3) Level difference between indoor units

Piping length


	Capability
Total piping length	1000 m
Longest length - actual (equivalent)	175 m (200 m)
Longest length after first branch	90 m*
Largest height difference between indoor and outdoor units - ODU up (down)	90 m (110 m)
Largest height difference between indoor units	30 m

* The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please refer to technical manual for further information.

WIDE OPERATION RANGE

VRF MV6i can operate in a wide ambient temperature range.

It can operate stably from -15°C up to 48°C in cooling mode and from -25°C to 24°C in heating mode.




High Reliability

PRECISE OIL CONTROL TECHNOLOGY

Four stages of oil control technology ensure all outdoor compressor oil is always kept at a safe level, eliminating any compressor oil shortage problems.

- (1) Compressor internal oil separation.
- (2) High-efficiency centrifugal oil separator (with separation efficiency of up to 99%) ensures that oil is separated from the discharge gas and returned to the compressors in a timely fashion.
- (3) Oil balance pipes between compressors ensure even oil distribution to keep compressors running normally.
- (4) Auto oil return program monitors the running time and system status to ensure reliable oil return.

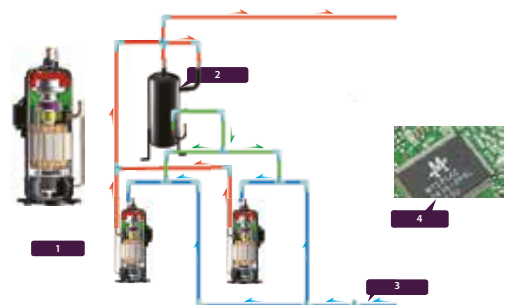

BACKUP OPERATION



- Operation compressor
- Standby compressor
- Failed compressor

In one unit with two compressors, if one compressor is failed, the other compressor can be backup instead of the failed one to maintain up to 4 days interim capacity, allowing time for maintenance or repair while comfort remains guaranteed.

ANTI-CORROSION PROTECTION

Outdoor units are given anti-corrosion treatment for non-extreme conditions as standard and can also be customized with heavy anti-corrosion treatment on main components for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life. The integrity of the anti-corrosion treatment is ensured by subjecting major components and parts to salt mist testing, moisture and heating testing and light aging testing.


Please contact your local dealer for further information about customization price and availability.

- Fan motor
- Painted sheet metal
- Screws / Bolts / Gaskets
- Heat exchanger aluminum foil
- Heat exchanger copper pipe
- Electric Control Box Case



REFRIGERANT COOLING PCB


The MV6i series uses refrigerant cooling technology to cool the electric control box. It decreases the average temperature of electrical control components by about 8 degrees, guaranteeing the stable and safe running of the control system.



Enhanced Comfort


NIGHT MODE

The night silent mode feature includes various scheduling options that can be used to reduce noise levels when low noise operation is required: only during night hours or continuously, and with different noise reductions levels limiting only maximum fan speed or compressor speed also.

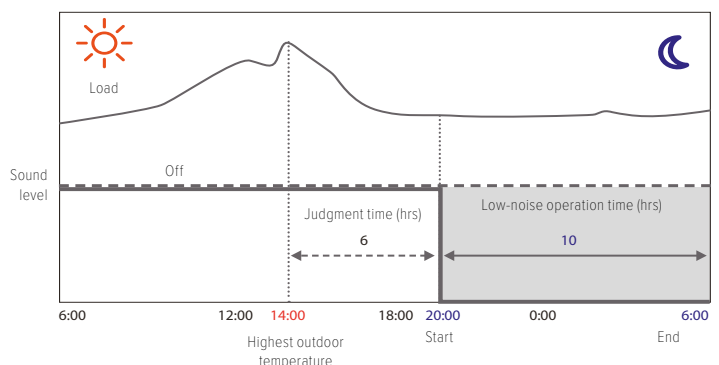


ENHANCED HEATING CAPACITY

Thanks to the vapour injection DC Inverter compressors, heating capacity can achieve 100% output when the ambient temperature is down to -5°C and 90% output when ambient temperature is down to -15°C .

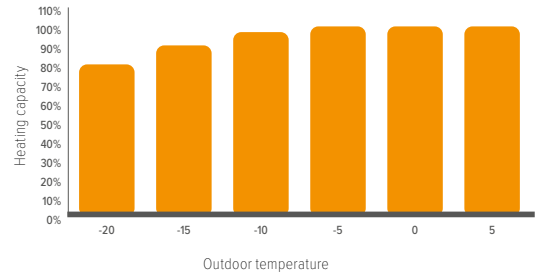

INTELLIGENT DEFROSTING TECHNOLOGY

The intelligent defrosting program calculates the time required for defrosting according to the actual system status, eliminating heat losses from unnecessary defrosting. A specialized defrosting valve reduces time required for defrosting to as little as four minutes.

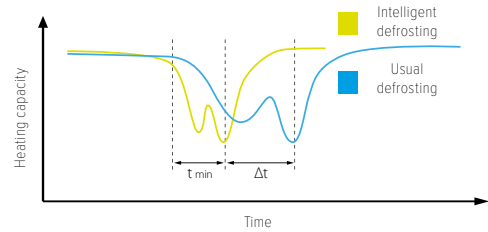

MULTIPLE PRIORITY MODE SETTINGS AVAILABLE

Operating mode priority can be set among different modes (automatic, cooling priority, VIP indoor unit, heating only, cooling only) to satisfy every specific user's need. Setting can be performed on outdoor unit directly or by centralized controller.

SMART INPUT/OUTPUT CONTACTS

Convenient connectors are available as standard on unit PCB, to realize some convenient operations on field with other building appliances depending on users' needs. Available contacts are heating/cooling switch as input and alarm as output.

Easy Installation and Service

AUTO ADDRESSING

Outdoor unit can distribute addresses to indoor units automatically. Remote and wired controllers can be used to query or modify each indoor unit's address.





VRF MV6i

Size		MV6i-XMi	252T	280T	335T	400T	450T	500T	560T	615T
Capacity	HP		8	10	12	14	16	18	20	22
	Capacity	kW	25,2	28,0	33,5	40,0	45,0	50,0	56,0	61,5
	Power input	kW	6,19	7,14	8,9	11,0	12,9	14,7	16,0	20,2
	EER	-	4,07	3,92	3,75	3,65	3,50	3,40	3,50	3,05
	SEER	-	7,60	7,45	7,20	6,10	5,90	6,80	6,45	6,25
	ηs,c	%	301	295	285	241	233	269	255	247
Operating temperature range (DB)		°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	25,2	28,0	33,5	40,0	45,0	50,0	56,0	61,5
	Power input	kW	5,1	5,77	7,6	9,3	10,7	12,2	13,8	17,6
	COP	-	4,94	4,85	4,40	4,30	4,20	4,10	4,05	3,50
	SCOP	-	4,00	4,00	4,41	4,20	4,20	3,65	3,65	3,65
	ηs,h	%	157	157	173,4	165	165	143	143	143
	Operating temperature range (DB)		°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	13	16	20	23	26	29	33	36
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	1	1	1	1	1	1	2	2
Refrigerant	Factory charge	kg	11	11	11	13	13	13	17	17
	CO ₂ equivalence	tonne	22,97	22,97	22,97	27,14	27,14	27,14	35,5	35,5
Pipe connections	Liquid pipe	mm	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 19,1	Ø 19,1	Ø 19,1
	Gas pipe	mm	Ø 25,4	Ø 25,4	Ø 28,6	Ø 31,8	Ø 31,8	Ø 31,8	Ø 31,8	Ø 31,8
Fan motors	Quantity	-	1	1	1	1	1	1	2	2
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)		mm	990x1635x790	990x1635x790	990x1635x790	1340x1635x850	1340x1635x850	1340x1635x850	1340x1635x825	1340x1635x825
Weight		kg	227	227	227	277	277	295	344	344
Air flow rate		m ³ /h	11 000	11 000	11 000	13 000	13 000	13 000	17 000	17 000
Sound pressure level ⁽⁴⁾		dB(A)	58	58	60	62	65	65	66	66
Sound power level ⁽⁴⁾		dB(A)	78	78	81	85	88	88	88	88
Power supply		V/Ph/Hz	380-415/3/50+N							

OUTDOOR UNITS



VRF MV6i

Size		MV6i-XMi	670T	730T	785T	850T	900T
Capacity	HP		24	26	28	30	32
	Capacity	kW	67,0	73,0	78,5	85,0	90,0
	Power input	kW	21,6	21,6	24,9	28,3	32,1
	EER	-	3,10	3,40	3,15	3,00	2,80
	SEER	-	6,84	6,49	6,20	6,05	5,87
	ηs,c	%	270,6	256,6	245	239	231,8
Operating temperature range (DB)		°C	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
Heating ⁽²⁾	Capacity	kW	67,0	73,0	78,5	85,0	90,0
	Power input	kW	17,27	18,58	22,49	24,3	26,5
	COP	-	3,88	3,93	3,49	3,50	3,40
	SCOP	-	3,70	3,70	3,70	3,75	3,75
	ηs,h	%	145	145	145	147	147
	Operating temperature range (DB)		°C	-25 ~ 24	-25 ~ 24	-25 ~ 24	-25 ~ 24
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	39	43	46	50	53
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	2	2	2	2	2
Refrigerant	Factory charge	kg	22	22	22	25	25
	CO ₂ equivalence	tonne	45,94	45,94	45,94	52,2	52,2
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 22,2	Ø 22,2	Ø 22,2	Ø 22,2
	Gas pipe	mm	Ø 31,8	Ø 31,8	Ø 31,8	Ø 38,1	Ø 38,1
Fan motors	Quantity	-	2	2	2	2	2
	Static pressure	Pa	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40	0 ~ 40
Dimensions (Width x Height x Depth)		mm	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850	1730x1830x850
Weight		kg	407	429	429	475	475
Air flow rate		m ³ /h	25 000	25 000	25 000	24 000	24 000
Sound pressure level ⁽⁴⁾		dB(A)	67	68	68	68	68
Sound power level ⁽⁴⁾		dB(A)	89	90	90	90	90
Power supply		V/Ph/Hz	380-415/3/50+N				

EER and COP according EN 14511 regulation, SEER and SCOP according EN14825 regulation

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1,3 m above the floor.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

VRF MV6R

MV6R-XMi 252T÷1500T

NEW

OUTDOOR UNITS




Heat recovery outdoor units

High efficiency

HEAT RECOVERY TECHNOLOGY



MV6R heat recovery outdoor units can perform both cooling and heating operation simultaneously and independently within the same system, ensuring the maximum operating flexibility for the users. Heat recovery is achieved by diverting exhaust heat from indoor units in cooling mode to areas requiring heating, minimizing the heat exchange with outside environment. As a result, power input and electricity costs are minimized, ensuring the best energy efficiency. In addition, inverter technology allows to adapt precisely to variable capacity loads.

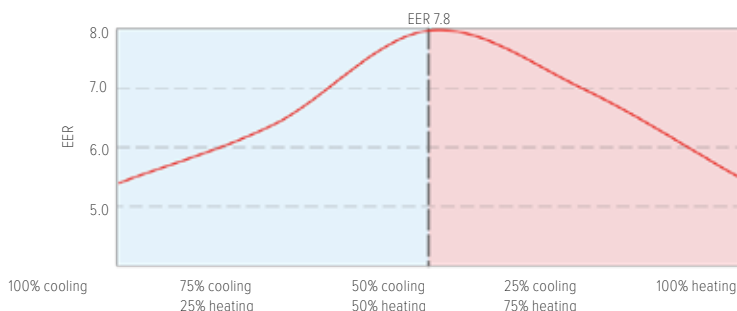

EER in simultaneous cooling and heating mode are based on the following condition:
Outdoor temperature 7°C DB/6°C WB, indoor temperature 27°C DB/19°C WB for cooling, indoor temperature 20°C DB for heating.

EVI (ENHANCED VAPOR INJECTION) COMPRESSOR


Thanks to the vapor injection DC inverter compressor, the MV6R series can run heating mode stably down to -25°C, furthermore strongly increasing the heating capacity especially at low ambient temperature. Compressor is designed to run at 7% modulation minimum, highly improving system efficiency at part load operation.

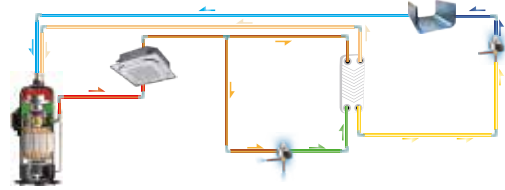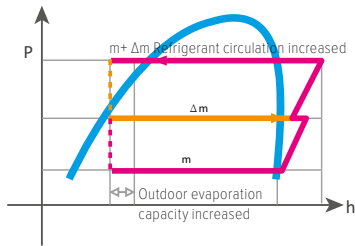

EMS (ENERGY MANAGEMENT SYSTEM)


Floating refrigerant temperature for balancing comfort and efficiency

The evaporating temperature (in cooling) and condensing temperature (in heating) are automatically adjusted according to both indoor and outdoor temperature to maximize the comfort and energy efficiency, increasing the seasonal efficiency by 30%.

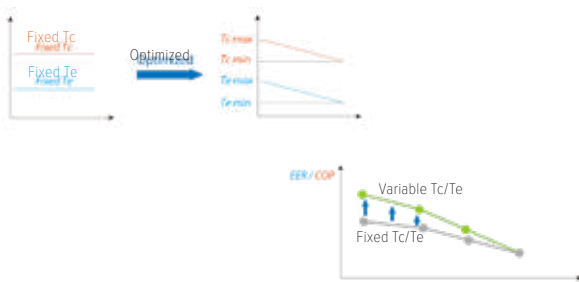

Capacity output limitation for shortage of electricity

With the integration of EMS, for projects with limited electricity supply, MV6R can be set to output 40-100% capacity.

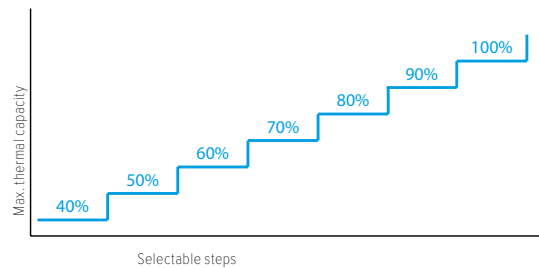

MR. DOCTOR



Force cooling /heating commissioning: force cooling or force heating operation can check the system comprehensively and quickly.



Self-diagnosis: all new diagnosis software to monitor all operating parameters and detailed information.




Automatic data backup: automatic data backup of last 30 minute's operation record.



Auxiliary PCB for quick access: placed on side column of the unit, it provides easy access to LED display and main settings without removing the front panel.


INDEPENDENT CONTROL OF HEAT EXCHANGERS AND COMPRESSORS

Both in cooling and heating mode, the outdoor heat exchanger and compressor are independently controlled to improve performances. So, in a multiple-unit system, when the compressor of an outdoor unit does not operate due to a lower thermal load, its heat exchanger is kept active to maximize heat exchange surface and efficiency.

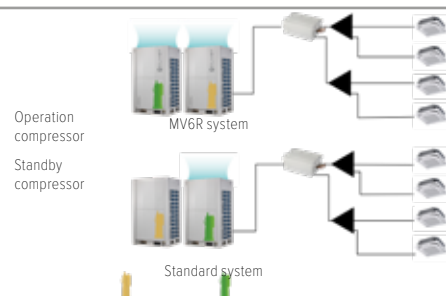



PHE (PLATE HEAT EXCHANGER) SUBCOOLING

Plate Heat Exchanger as a secondary intercooler boosts up refrigerant subcooling and improves 10% energy efficiency.

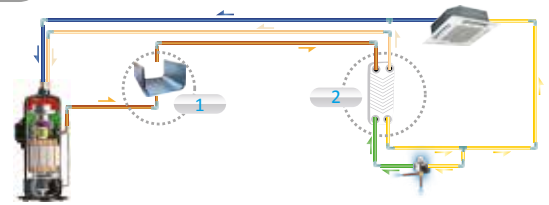

HIGH EER AND COP VALUES

OUTDOOR UNITS

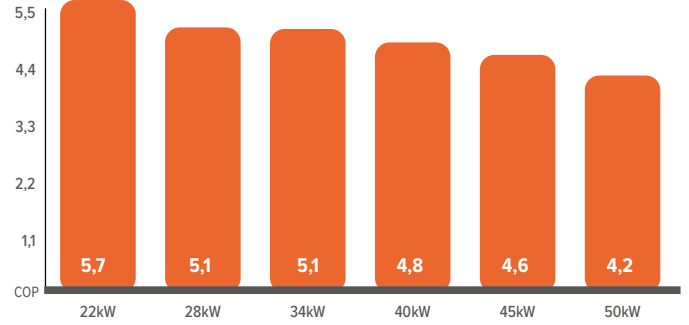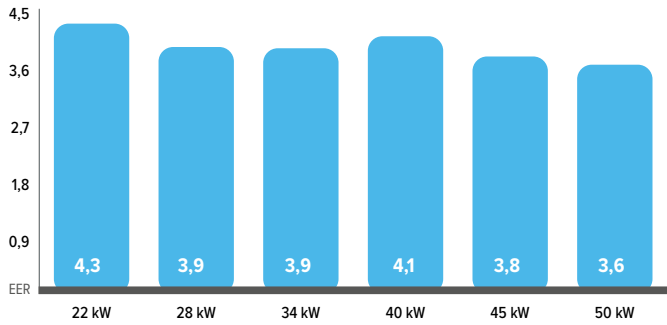

Wide Application range

WIDE CAPACITY RANGE

VRF MV6R series capacity is up to 18HP with a single unit and up to a maximum of 54HP for a single system with a combination of 3 modules, covering all possible applications and building dimensions.



8/10/12 HP
(with single fan)



14/16/18 HP
(with dual fan)




20-36 HP



38-54 HP

LONG PIPING CAPABILITY



Piping length

Piping length	Capability
Total piping length	1000 m
Longest length between outdoor and indoor units - actual (equivalent)	175 m (200 m)
Longest length after first branch	90 m*
Longest length between MS box and IDU	40 m
Largest height difference between outdoor and indoor units - ODU above (below)	110 m (110 m)
Largest height difference between indoor units	30 m

*The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please refer to technical manual for further information.


- (1) Longest length between outdoor and indoor units
- (2) Level difference between indoor units and outdoor units
- (3) Level difference between indoor units

WIDE OPERATION RANGE

VRF MV6R can operate in a wide ambient temperature range.

It can operate stably from -15°C up to 52°C in cooling mode and from -25°C to 19°C in heating mode.

Simultaneous heating and cooling operation is guaranteed from -15°C to 27°C in main cooling and from -15°C to 19°C in main heating.*



*Cooling mode down to -15°C available in combination with single MS box MS01. Wet-bulb temperatures in cooling mode, dry-bulb in heating mode.

High Reliability

DUTY CYCLING

Duty cycling equalizes the running time of the outdoor units in a multiple-unit system and of the compressors in each unit, significantly extending compressor lifespan.




PRECISE OIL CONTROL TECHNOLOGY

Three stages of oil control technology ensure all outdoor compressor oil is always kept at a safe level, eliminating any compressor oil shortage problems.

- (1) Compressor internal oil separation.
- (2) High-efficiency centrifugal oil separator (with separation efficiency of up to 99%) ensures that oil is separated from the discharge gas and returned to the compressors in a timely fashion.
- (3) Auto oil return program monitors the running time and system status to ensure reliable oil return.



BACKUP OPERATION

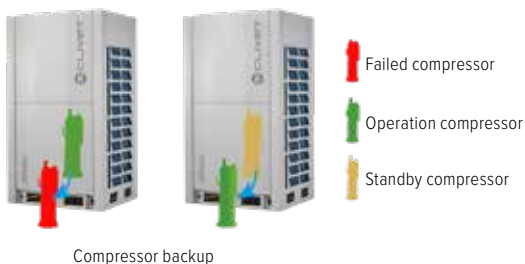

In a multiple-unit system, if one module fails, the other modules provide backup so that the system can continue operating, maintaining up to 4 days interim capacity and allowing time for maintenance or repair while comfort remains guaranteed.

ANTI-CORROSION PROTECTION

Outdoor units are given anti-corrosion treatment for non-extreme conditions as standard and can also be customized with heavy anticorrosion treatment on main components for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life. The integrity of the anti-corrosion treatment is ensured by subjecting major components and parts to salt mist testing, moisture and heating testing and light aging testing.


Please contact your local dealer for further information about customization price and availability.

- Fan motor
- Painted sheet metal
- Screws / Bolts / Gaskets
- Heat exchanger aluminum foil
- Heat exchanger copper pipe
- Electric Control Box Case



REFRIGERANT COOLING PCB

The MV6R series uses refrigerant cooling technology to cool the electric control box. It decreases the average temperature of electrical control components by about 8 degrees, guaranteeing the stable and safe running of the control system.



AUTO SNOW-BLOWING FUNCTION

The innovatively designed auto snow-blowing function enables the outdoor unit to prevent the accumulation of snow by itself.



DUST-CLEAN FUNCTION


The innovatively designed dust-clean function enables the outdoor unit to prevent the dust by itself.



Enhanced Comfort


NIGHT SILENT MODE

The night silent mode feature includes various scheduling options that can be used to reduce noise levels when low noise operation is required: only during night hours or continuously, and with different noise reductions levels limiting only maximum fan speed or compressor speed also.

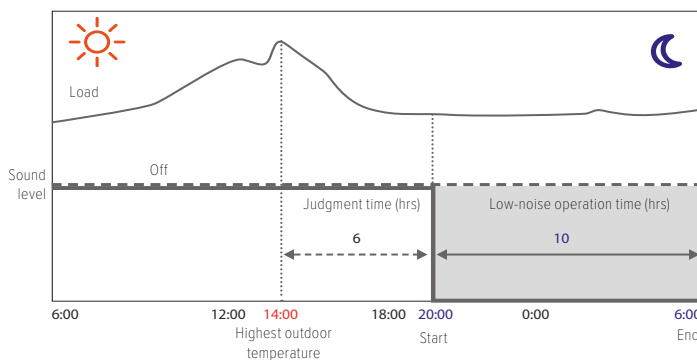


ENHANCED HEATING CAPACITY

Thanks to the vapour injection DC Inverter compressor, heating capacity can achieve 100% output when the ambient temperature is down to -5°C and 90% output when ambient temperature is down to -15°C .

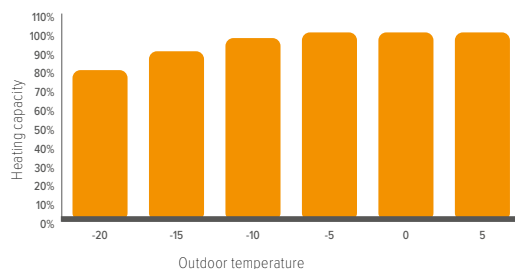

CONTINUOUS HEATING DURING DEFROST

As an alternative to the traditional defrost technology performed reverting the refrigerant cycle, in a multiple-units MV6R system it is possible to keep heating by defrosting alternatively and independently the heat exchangers of different units. Thus, it is possible to supply continuously heating without stopping for defrost operations.

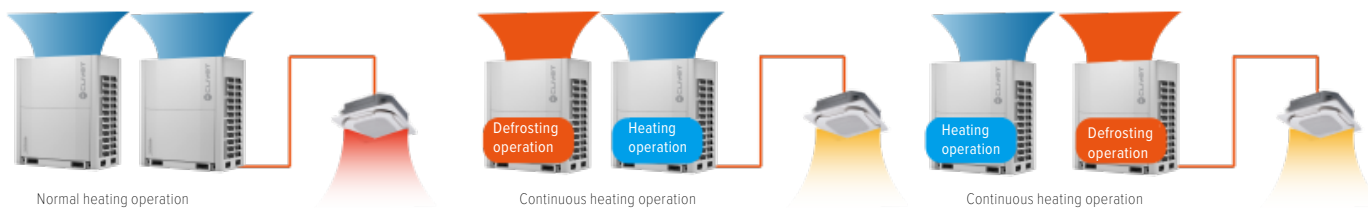

Easy Installation and Service


AUTO ADDRESSING

Outdoor unit can distribute addresses to indoor units automatically. Remote and wired controllers can be used to query or modify each indoor unit's address.



AUTOMATIC REFRIGERANT CHARGING AND RECYCLING FUNCTION


Automatic refrigerant charging function make the installation and service easier and more efficient, automatically collecting refrigerant from the tank and stopping the operation when exact refrigerant charge is done. Automatic refrigerant recycling allows to recover and accumulate the refrigerant inside the outdoor unit or on indoor units side automatically when required before repairing, strongly simplifying the technical intervention.

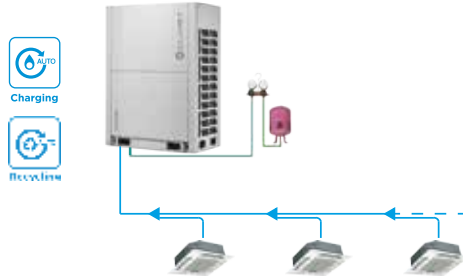

Suitable for any application

MAXIMUM APPLICATION FLEXIBILITY

In addition to simultaneously heating and cooling different spaces via different indoor units belonging to the same system, MV6R series can manage fresh air processing units (A), beside high temperature hydronic modules to supply hot water up to 80°C (B), or air handling units through specific kits (C). According to the different combinations of units connected, the system can manage up to 200% of outdoor units' capacity.*

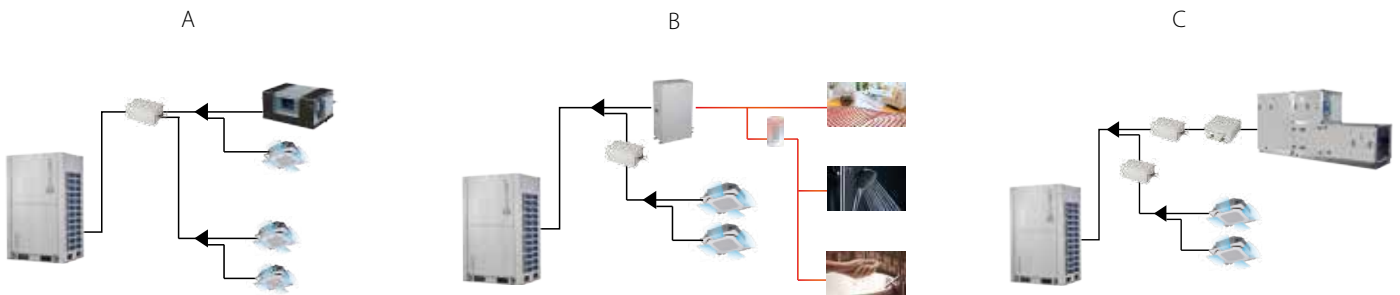

*Please refer to technical manual for further information about total capacity index as function of specific units connected.


FAN ESP UP TO 80 PA

Fan motor can be set to provide an external static pressure up to 80 Pa, facilitating the installation of the unit in technical rooms or in areas where the proper airflow cannot be ensured, by installing ducts and directing the air towards the outside.



REFRIGERANT LEAK DETECTION FUNCTION

Refrigerant leakage detectors can be managed through specific input/output contacts to automatically stop the system operation and to display the malfunction on remote controllers or via possible luminous signal and activating also specific exhaust fans if needed.*

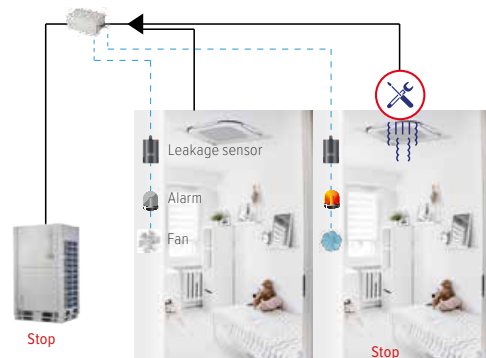

*Function available in combination with single MS box MS01. Refrigerant leakage detectors and possible alarm lights or exhaust fans to be supplied by 3rd party



OUTDOOR UNITS

VRF MV6R

Size		MV6R-XMi	252T	280T	335T	400T	450T	500T
Capacity		HP	8	10	12	14	16	18
Cooling ⁽¹⁾	Capacity	kW	22,4	28,0	33,5	40,0	45,0	50,0
	Power input	kW	5,25	7,18	8,64	9,83	12,00	13,81
	EER	-	4,27	3,90	3,88	4,07	3,75	3,62
	SEER	-	7,72	7,56	7,30	6,70	6,67	6,88
	ηs,c	%	305,8	299,4	289	265	263,8	272,2
	Operating temperature range (DB) ⁽⁵⁾	°C	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52
Heating ⁽²⁾	Capacity	kW	22,4	28,0	33,5	40,0	45,0	50,0
	Power input	kW	3,96	5,46	6,57	8,26	9,78	11,90
	COP	-	5,66	5,13	5,10	4,84	4,60	4,20
	SCOP	-	4,18	4,25	4,60	4,35	4,33	4,20
	ηs,h	%	164,2	167	181	171	170,2	165
	Operating temperature range (DB)	°C	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27
	Operating temperature range DHW (DB) ⁽⁶⁾	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %
	Max quantity	-	64	64	64	64	64	64
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	1	1	1	1	1	1
Refrigerant	Factory charge	kg	8	8	8	10	10	10
	CO ₂ equivalence	tonne	16,70	16,70	16,70	20,88	20,88	20,88
Pipe connections	Liquid pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9
	Low pressure gas pipe	mm	Ø 25,4	Ø 25,4	Ø 25,4	Ø 28,6	Ø 28,6	Ø 28,6
	High pressure gas pipe	mm	Ø 19,1	Ø 19,1	Ø 19,1	Ø 22,2	Ø 22,2	Ø 22,2
Fan motor	Quantity	-	1	1	1	2	2	2
	Static pressure	Pa	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80
Dimensions (Width x Height x Depth)	mm	990×1635×790	990×1635×790	990×1635×790	1340×1635×825	1340×1635×825	1340×1635×825	1340×1635×825
Weight	kg	232	232	232	300	300	300	
Air flow rate	m ³ /h	9 000	9 500	10 000	14 000	14 900	15 800	
Sound pressure level ⁽⁴⁾	dB(A)	58	58	60	61	64	65	
Sound power level ⁽⁴⁾	dB(A)	78	78	81	81	88	88	
Power supply	V/Ph/Hz	380-415/3/50+N						

EER and COP according EN 14511 regulation, SEER and SCOP according EN14825 regulation

- (1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.
- (2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity. Please refer to technical manual for further information about total capacity index as function of specific units connected.

(4) Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1,3 m above the floor.

(5) -15 °C to -5 °C operation available in combination with MS box MS01

(6) DHW available in combination with high temperature hydro module HWM-2-XMi 140



VRF MV6R

Size	MV6R-XMi	560T	615T	680T	735T	785T	835T	900T	950T	1000T	
Capacity	HP	20	22	24	26	28	30	32	34	36	
Combination	HP	10x2	10+12	10+14	12+14	12+16	12+18	16x2	16+18	18x2	
Cooling ⁽¹⁾	Capacity	kW	56,0	61,5	68,0	73,5	78,5	83,5	90,0	95,0	100,0
	Power input	kW	14,36	15,82	17,01	18,46	20,64	22,45	24,00	25,81	28,72
	EER	-	3,90	3,89	4,00	3,98	3,80	3,72	3,75	3,68	3,48
	Operating temperature range (DB) ⁽⁵⁾	°C	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52
Heating ⁽²⁾	Capacity	kW	56,0	61,5	68,0	73,5	78,5	83,5	90,0	95,0	100,0
	Power input	kW	10,92	12,03	13,72	14,83	16,35	18,47	19,57	21,69	21,83
	COP	-	5,13	5,11	4,96	4,96	4,80	4,52	4,60	4,38	4,58
	Operating temperature range (DB)	°C	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27
	Operating temperature range DHW (DB) ⁽⁶⁾	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	
	Max quantity	-	64	64	64	64	64	64	64	64	
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	
	Quantity	-	2	2	2	2	2	2	2	2	
Refrigerant	Factory charge	kg	16	16	18	18	18	18	20	20	20
	CO ₂ equivalence	tonne	33,41	33,41	37,58	37,58	37,58	37,58	41,76	41,76	41,76
Piping connections	Liquid pipe	mm	Ø 15,9	Ø 15,9	Ø 15,9	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1
	Low pressure gas pipe	mm	Ø 28,6	Ø 28,6	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9
	High pressure gas pipe	mm	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6
Fan motor	Quantity	-	2	2	3	3	3	3	4	4	
	Static pressure	Pa	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80
Dimensions (Width x Height x Depth)	Unit 1	mm	990×1635 ×790	990×1635 ×790	990×1635 ×790	990×1635× 790	990×1635 ×790	990×1635 ×790	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825
	Unit 2	mm	990×1635 ×790	990×1635 ×790	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825
Weight	kg	464	464	532	532	532	532	600	600	600	
Air flow rate	m ³ /h	19 000	19 500	23 500	24 000	24 900	25 800	29 800	30 700	31 600	
Sound pressure level ⁽⁴⁾	dB(A)	61	62	63	64	65	66	67	68	68	
Sound power level ⁽⁴⁾	dB(A)	81	83	83	84	89	89	91	91	91	
Power supply	V/Ph/Hz	380-415/3/50+N									

OUTDOOR UNITS

EEER and COP according EN 14511 regulation

- (1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.
 (2) Indoortemperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity. Please refer to technical manual for further information about total capacity index as function of specific units connected.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1,3 m above the floor.

(5) -15 °C to -5 °C operation available in combination with MS box MS01

(6) DHW available in combination with high temperature hydro module HWM-2-XMi 140



VRF MV6R

Size	MV6R-XMi	1070T	1120T	1185T	1235T	1300T	1350T	1400T	1450T	1500T	
Capacity	HP	38	40	42	44	46	48	50	52	54	
Combination	HP	12x2+14	12x2+16	12+14+16	12+16x2	14+16x2	16x3	16x2+18	16+18x2	18x3	
Cooling ⁽¹⁾	Capacity	kW	107,0	112,0	118,5	123,5	130,0	135,0	140,0	145,0	150,0
	Power input	kW	27,10	29,27	30,46	32,64	33,83	36,00	37,81	39,62	41,44
	EER	-	3,95	3,83	3,89	3,78	3,84	3,75	3,70	3,66	3,62
	Operating temperature range (DB) ⁽⁵⁾	°C	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52	-15 ~ 52
Heating ⁽²⁾	Capacity	kW	107,0	112,0	118,5	123,5	130,0	135,0	140,0	145,0	150,0
	Power input	kW	21,40	22,92	24,62	26,13	27,83	29,35	31,47	33,59	35,71
	COP	-	5,00	4,89	4,81	4,73	4,67	4,60	4,45	4,32	4,20
	Operating temperature range (DB)	°C	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27	-25 ~ 27
	Operating temperature range DHW (DB) ⁽⁶⁾	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	50 ~ 200 %	
	Max quantity	-	64	64	64	64	64	64	64	64	
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	
	Quantity	-	3	3	3	3	3	3	3	3	
Refrigerant	Factory charge	kg	26	26	28	28	30	30	30	30	
	CO ₂ equivalence	tonne	54,29	54,29	58,46	58,46	62,64	62,64	62,64	62,64	
Piping connections	Liquid pipe	mm	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	
	Low pressure gas pipe	mm	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	Ø 41,3	
	High pressure gas pipe	mm	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	Ø 34,9	
Fan motor	Quantity	-	4	4	5	5	6	6	6	6	
	Static pressure	Pa	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	0 ~ 80	
Dimensions (Width x Height x Depth)	Unit 1	mm	990×1635 ×790	990×1635 ×790	990×1635 ×790	990×1635 ×790	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	
	Unit 2	mm	990×1635 ×790	990×1635 ×790	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	
	Unit 3	mm	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	1340×1635 ×825	
Weight	kg	764	764	832	832	900	900	900	900	900	
Air flow rate	m ³ /h	34 000	34 900	38 900	39 800	43 800	44 700	45 600	46 500	47 400	
Sound pressure level ⁽⁴⁾	dB(A)	65	67	67	68	68	69	69	69	70	
Sound power level ⁽⁴⁾	dB(A)	86	89	89	91	91	93	93	93	93	
Power supply	V/Ph/Hz	380-415/3/50+N									

EER and COP according EN 14511 regulation

- (1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Interconnecting piping length is 7,5 m, level difference is zero.
 (2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Interconnecting piping length is 7,5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity. Please refer to technical manual for further information about total capacity index as function of specific units connected.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1,3 m above the floor.

(5) -15 °C to -5 °C operation available in combination with MS box MS01

(6) DHW available in combination with high temperature hydro module HWM-2-XMi 140

MS box for VRF MV6R

Heat recovery and simultaneous heating and cooling within the same system are possible thanks to specific MS box located between outdoor units and indoor units, which separate gas-phase and liquid-phase refrigerant diverting it towards different spaces requiring heating or cooling.

MS box are available in various versions, with single branch or multiple branches.

SINGLE MS BOX

- Cooling mode operation extended down to -15 °C
- 3rd party refrigerant leakage sensors management and possible leakage insulation through specific shut-off valve
- Up to 8 indoor units connectable with a total capacity up to 32 kW (running in the same operating mode)
- Compact and light to install
- No drain piping needed
- Extreme control precision through a 3200 step electric ball valve
- Silent operation



MS01N1-D

OUTDOOR UNITS

MULTIPLE MS BOX

- 4, 6, 8, 10 and 12 branches versions available
- Up to 5 indoor units connectable for each branch (running in the same operating mode), for a total of 47 indoor units maximum per MS box for the 12 branches version
- Up to 16 kW for each branch, or 28 kW by connecting 2 branches



MS04N1-D

MS06N1-D

MS08N1-D

MS10N1-D

MS12N1-D

Technical data

MS Box for VRF MV6R



MS BOX		MS	01N1-D	04N1-D	06N1-D	08N1-D	10N1-D	12N1-D	
Size									
Number of branches		-	1	4	6	8	10	12	
Max. number of indoor units per branch ⁽¹⁾		-	8	5	5	5	5	5	
Max. total number of indoor units per MS box ⁽¹⁾		-	8	20	30	40	47	47	
Max. capacity per branch ⁽²⁾		kW	32	16	16	16	16	16	
Max. total capacity of indoor units per MS box		kW	32	49	63	85	85	85	
Pipe connections	Connections to outdoor units	Liquid pipe	mm	Ø 9,53 / Ø 12,7	Ø 9,53 / Ø 12,7 / Ø 15,9 / Ø 19,1	Ø 9,53 / Ø 12,7 / Ø 15,9 / Ø 19,1	Ø 12,7 / Ø 15,9 / Ø 19,1 / Ø 22,2	Ø 12,7 / Ø 15,9 / Ø 19,1 / Ø 22,2	Ø 12,7 / Ø 15,9 / Ø 19,1 / Ø 22,2
		Low pressure gas pipe	mm	Ø 15,9 / Ø 19,1 / Ø 22,2	Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 22,2 / Ø 28,6 / Ø 34,9	Ø 22,2 / Ø 28,6 / Ø 34,9	Ø 22,2 / Ø 28,6 / Ø 34,9
	Connections to indoor units	High pressure gas pipe	mm	Ø 12,7 / Ø 15,9 / Ø 19,1	Ø 15,9 / Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 15,9 / Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 19,1 / Ø 22,2 / Ø 28,6	Ø 19,1 / Ø 22,2 / Ø 28,6
		Liquid pipe	mm	Ø 6,35 / Ø 9,53	Ø 6,35 / Ø 9,53	Ø 6,35 / Ø 9,53	Ø 6,35 / Ø 9,53	Ø 6,35 / Ø 9,53	Ø 6,35 / Ø 9,53
	Gas pipe	mm	Ø 12,7 / Ø 15,9	Ø 12,7 / Ø 15,9	Ø 12,7 / Ø 15,9	Ø 12,7 / Ø 15,9	Ø 12,7 / Ø 15,9	Ø 12,7 / Ø 15,9	
Dimensions (Width x Height x Depth)		mm	440×195×296	668×250×574	668×250×574	974×250×574	974×250×574	974×250×574	
Weight		kg	10,5	33	36	48	51	54	
Sound pressure level ⁽³⁾		dB(A)	40	44	45	47	47	47	
Sound power level ⁽³⁾		dB(A)	60	63	65	65	65	65	
Power supply		V/Ph/Hz	220-240/1/50						

(1) All indoor units connected to the same branch of MS box should operate the same mode.

(2) For 4 to 12 branches MS box models, 16 kW to 28 kW capacity indoor units can be connected by merging two branches to one through FQZHN-09A connection kit.

(3) Sound values are measured in a semi-anechoic room, at a position 1m below the MS box in mode switch condition.

It is recommended to avoid the installation of MS box in locations with low-noise requirements.

VRF MW

MW-XMi 252T÷1005T

OUTDOOR UNITS





Water-source heat pump

High efficiency

HIGH ENERGY SAVING

Designed for indoor installation, MW Series combines water system and refrigerant system perfectly. COP and EER are up to 6,07 and 5,25 respectively. Compared with air-cooled VRF, energy saving is higher. In addition, thanks to water constant temperature throughout the year, energy efficiency is kept always high.

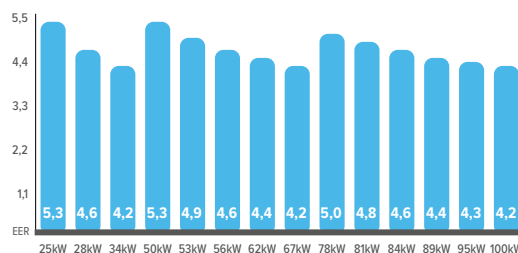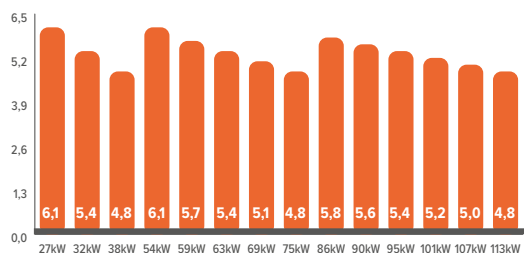


HIGH EFFICIENCY DOUBLE-PIPE HEAT EXCHANGER

With the innovatively designed double-pipe heat exchanger, the water quality required is low. The water side has large circulation area to avoid clogs, ensuring higher reliability and easier maintenance.



WATER SIDE HEAT RECOVERY POSSIBILITY


In modern large-scale buildings, the load between the internal and external areas can be different. It may occur in some situations that both cooling and heating are required. The MW Series not only can achieve meticulous system division in different areas but also can recover heat on water side, significantly improving energy efficiency.

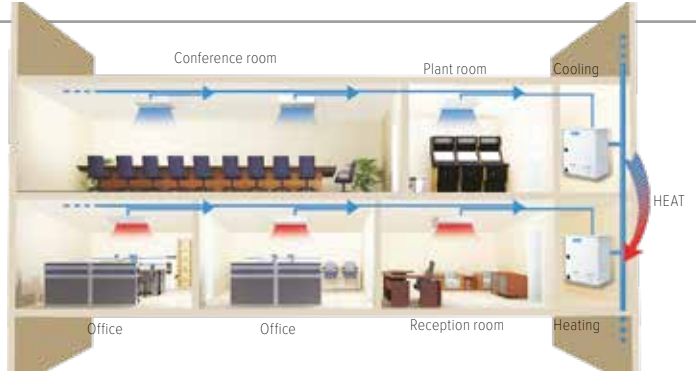

OUTDOOR UNITS

AUTO ADDRESSING

Outdoor unit can distribute addresses to indoor units automatically. Remote and wired controllers can be used to query or modify each indoor unit's address.

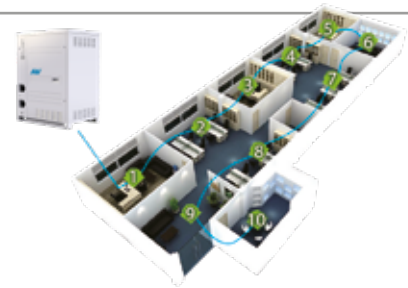

Wide Application Range

WIDE RANGE OF OUTDOOR UNITS

The Water Cooled MW Series capacity ranges from 8HP to 36HP, meeting all customer requirements from small to large buildings.




8/10/12 HP




Max 3 units combination

WIDE OPERATION TEMPERATURE RANGE

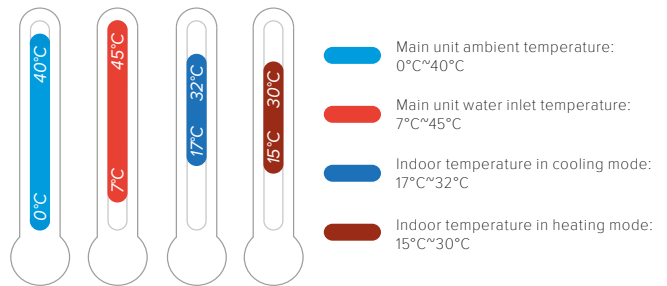

LONG PIPING LENGTH



Piping length

Piping length	Capability
Total piping length	300 m
Longest length - actual (equivalent)	120 m (150 m)
Longest length after first branch	90 m*
Largest height difference between indoor and outdoor units - ODU up (down)	50 m (40 m)
Largest height difference between indoor units	30 m

* The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please refer to technical manual for further information.

- (1) Longest actual piping length
- (2) Level difference between indoor units and outdoor units
- (3) Level difference between indoor units



VRF MW

Size	MW-XMi	252T	280T	335T	504T	532T	560T	615T	670T
Capacity	HP	8	10	12	16	18	20	22	24
Combination	HP	-	-	-	8x2	8+10	10x2	10+12	12x2
Cooling ⁽¹⁾	Capacity	kW	25,2	28	33,5	50,4	53,2	56	67
	Power input	kW	4,8	6,1	8,0	9,6	10,9	12,2	14,1
	EER	-	5,25	4,59	4,19	5,25	4,88	4,59	4,36
	Operating water temperature range (DB)	°C	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45
Heating ⁽²⁾	Capacity	kW	27	31,5	37,5	54	58,5	63	75
	Power input	kW	4,45	5,83	7,8	8,9	10,3	11,66	13,63
	COP	-	6,07	5,40	4,81	6,07	5,69	5,40	5,06
	Operating water temperature range (DB)	°C	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %
	Max quantity	-	13	16	19	23	29	33	36
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	-	1	1	1	2	2	2	2
Heat exchanger	Type ⁽⁴⁾	-	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch
	Rated water flow volume	m ³ /h	5,4	6	7,2	10,8	11,4	8	13,2
Refrigerant	Factory charge	kg	2	2	2	4	4	4	4
	CO ₂ equivalence	tonne	4,18	4,18	4,18	8,35	8,35	8,35	8,35
Pipe connections	Liquid pipe	mm	Ø 12,7	Ø 12,7	Ø 15,9	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9
	Gas pipe	mm	Ø 25,4	Ø 25,4	Ø 31,8	Ø 28,6	Ø 28,6	Ø 28,6	Ø 28,6
	Oil balance pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35
Dimensions (Width x Height x Depth)	Unit 1	mm	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550
	Unit 2	mm	-	-	-	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550
Weight	kg	146	146	147	292	292	292	293	294
Sound pressure level ⁽⁵⁾	dB(A)	51	52	52	53	53	53	54	54
Sound power level ⁽⁵⁾	dB(A)	72	74	74	75	75	75	76	76
Power supply	V/Ph/Hz	380-415/3/50+N							

EER and COP according EN 14511 regulation

(4) D-P HeatExch = Double-pipe heat exchanger

(1) Indoor temperature 27°C DB/19°C WB; Main unit ambient temperature 35°C DB/24°C WB; Water inlet temperature 30°C. Interconnecting piping length is 5 m, level difference is zero.

(5) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1 m above the floor.

(2) Indoor temperature 20°C DB/15°C WB; Main unit ambient temperature 7°C DB/6°C WB; Water inlet temperature 20°C. Interconnecting piping length is 5 m, level difference is zero.

(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity



VRF MW

Size	MW-XMi	784T	812T	840T	895T	950T	1005T	
Capacity	HP	26	28	30	32	34	36	
Combination	HP	8x2+10	8+10x2	10x3	10x2+12	10+12x2	12x3	
Cooling ⁽¹⁾	Capacity	kW	78,4	81,2	84	89,5	95	100,5
	Power input	kW	15,7	17,0	18,3	20,2	22,1	24,0
	EER	-	4,99	4,78	4,59	4,43	4,30	4,19
	Operating water temperature range (DB)	°C	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45
Heating ⁽²⁾	Capacity	kW	85,5	90	94,5	100,5	106,5	112,5
	Power input	kW	14,73	16,11	17,49	19,46	21,43	23,4
	COP	-	5,80	5,59	5,40	5,16	4,97	4,81
	Operating water temperature range (DB)	°C	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45	7 ~ 45
Connectable indoor units	Total Capacity Index ⁽³⁾	-	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	50 ~ 130 %	
	Max quantity	-	43	46	50	53	56	59
Compressor	Type	-	DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	
	Quantity	-	3	3	3	3	3	
Heat exchanger	Type ⁽⁴⁾	-	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch	D-P HeatExch	
	Rated water flow volume	m ³ /h	16,8	17,4	18	19,2	15,2	21,6
Refrigerant	Factory charge	kg	6	6	6	6	6	
	CO ₂ equivalence	tonne	12,53	12,53	12,53	12,53	12,53	12,53
Pipe connections	Liquid pipe	mm	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	Ø 19,1	
	Gas pipe	mm	Ø 31,8	Ø 31,8	Ø 31,8	Ø 31,8	Ø 38,1	
	Oil balance pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	
Dimensions (Width x Height x Depth)	Unit 1	mm	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	
	Unit 2	mm	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	
	Unit 3	mm	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	780x1 000x550	
Weight	kg	438	438	438	439	440	441	
Sound pressure level ⁽⁵⁾	dB(A)	55	55	56	57	57	58	
Sound power level ⁽⁵⁾	dB(A)	77	77	78	79	79	80	
Power supply	V/Ph/Hz	380-415/3/50+N						

EER and COP according EN 14511 regulation

(1) Indoor temperature 27°C DB/19°C WB; Main unit ambient temperature 35°C DB/24°C WB; Water inlet temperature 30°C. Interconnecting piping length is 5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Main unit ambient temperature 7°C DB/6°C WB; Water inlet temperature 20°C. Interconnecting piping length is 5 m, level difference is zero.














(3) Total Capacity Index = indoor unit total capacity/outdoor unit capacity

(4) D-P HeatExch = Double-pipe heat exchanger

(5) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1 m above the floor.

INDOOR Units - Product Lineup

INDOOR UNITS

Name	Series	kW							
		1,7/1,8	2,2	2,8	3,6	4,5	5,2	5,6	
Cassette	1-way cassette		Q1DN-2-XMi	D18	D22	D28	D36	D45	D56
	2-way cassette		Q2DN-2-XMi		D22	D28	D36	D45	D56
	Compact 4-way cassette		Q4AN-2-XMi	D17	D22	D28	D36	D45	D52
	4-way cassette		Q4DN-2-XMi			D28	D36	D45	D56
Duct	Medium static pressure Duct		CNT2-2-XMi	D17	D22	D28	D36	D45	D56
	High static pressure Duct		CN-2-XMi						
	Fresh air processing unit		CNFA-2-XMi						
Wall mounted		GWMN-2-XMi	D17	D22	D28	D36	D45	D56	
Ceiling & floor		DDL2C-2-XMi				D36	D45	D56	
		DZGF3B-2-XMi		D22	D28	D36	D45	D56	
Floor standing		DZDF4-2-XMi		D22	D28	D36	D45	D56	
		DZDF5-2-XMi		D22	D28	D36	D45	D56	
High Temperature Hydro module		HWM-2-XMi							

● Unità DC
 ● High Temperature Hydro module

Fresh air processing units are not available for MINI VRF series. High Temperature Hydro module is available for VRF MV6R series only.

7,1	8,0	9,0	10,0	11,2	12,5	14,0	16,0	20,0	25,0	28,0	40,0	45,0	56,0
D71													
D71													
D71	D80	D90	D100	D112		D140							
D71	D80	D90		D112		D140							
D71	D80	D90		D112		D140	D160	D200	D250	D280	D400	D450	D560
					D125	D140							
D71	D80	D90											
D71	D80	D90		D112		D140							
D71	D80												
D71	D80												
D71	D80												

INDOOR Units - Functions at a glance



INDOOR UNITS


Name	Series	Auto restart function	Auto Addressing	Fresh Air	Auto Defrosting	Easy-cleaning Panel	
Cassette	1-way cassette 	Q1DN-2-XMi	✓	✓	✓ (D45-D71)	✓	✓
	2-way cassette 	Q2DN-2-XMi	✓	✓	✓	✓	✓
	Compact four-way cassette 	Q4AN-2-XMi	✓	✓	✓	✓	✓
	Four-way cassette 	Q4DN-2-XMi	✓	✓	✓	✓	✓
Duct	Medium static pressure Duct 	CNT2-2-XMi	✓	✓	✓	✓	-
	High static pressure Duct 	CN-2-XMi	✓	✓	✓	✓	-
	Fresh air processing unit 	CNFA-2-XMi	✓	✓	✓	✓	-
Wall mounted 	GWMN-2-XMi	✓	✓	-	✓	✓	
Ceiling & floor		DDLC-2-XMi	✓	✓	-	✓	✓
		DZGF3B-2-XMi	✓	✓	-	✓	-
Floor standing		DZDF4-2-XMi	✓	✓	-	✓	✓
		DZDF5-2-XMi	✓	✓	-	✓	✓

								
Follow Me	Anti cold air Function	Built-in Drain pump	LED Display	Built-in Filter	Independent Dehumidification	7 fan speeds	5 vertical flap positions + Auto Swing	Input on/off Output alarm
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	-	✓	✓	✓	-	✓
✓	✓	✓ (optional)	-	✓	✓	✓	-	✓
✓	✓	✓ (optional)	-	✓	✓	✓	-	✓
✓	✓	-	✓	✓	✓	✓	✓	✓
✓	✓	-	✓	✓	✓	✓	✓	✓
✓	✓	-	-	✓	✓	✓	-	✓
✓	✓	-	-	✓	✓	✓	-	✓
✓	✓	-	-	✓	✓	✓	-	✓

INDOOR UNITS

DC INDOOR UNITS

INDOOR UNITS



New generation indoor units for VRF systems

Wide application range

WIDE RANGE OF INDOOR UNITS

With 14 types and more than 100 models, Clivet VRF indoor units meet varied customer requirements in a wide range of locations including shopping malls, hospitals, office buildings, hotels and airports.



Comfort and Efficiency

HIGH EFFICIENCY DC FAN MOTOR

The power consumption of DC fan motor can be reduced greatly in comparison to corresponding AC type.




QUIET OPERATION

The low sound operation DC fan motor and optimized fan blades guarantee a smooth air discharge and provide a quiet living environment.




CONSTANT LEVEL OF INDOOR AIR TEMPERATURE

The DC Inverter fan motor adjusts of air flow based on thermal load instantly providing less temperature fluctuation and an improved living environment.

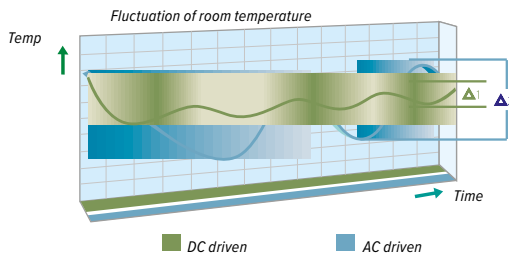


5-STEP SWING LOUVER

The air is comfortably spread upwards and downwards thanks to the 5-step swing louver that can be programmed via the controller.




7-SPEED FAN CONTROL

7 fan speeds of the indoor units provide control flexibility to meet the needs of different indoor conditions.

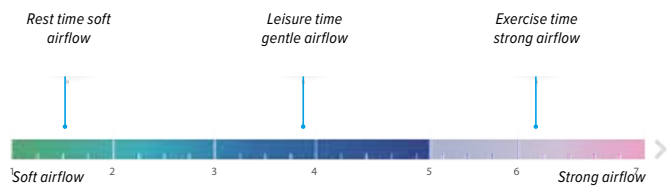


STATIC PRESSURE 20 STEPS CONTROL (DUCT UNIT)

Depending on the installation environment, medium static pressure duct can be precisely set among 10 different steps of static pressure/airflow rate combinations, and up to 20 steps for high static pressure duct via wired remote controller, providing comfortable environment suitable for any application.

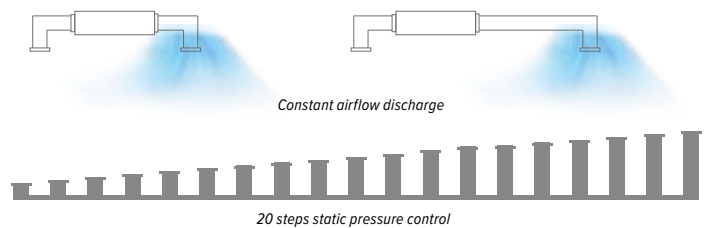

0,5 °C TEMPERATURE SETTING

Target temperature can be adjusted in 0.5°C or 1°C steps, increasing environmental comfort in combination with new generation controls.

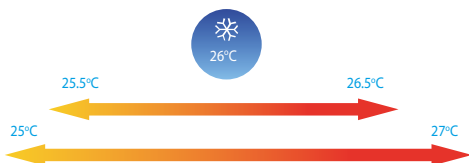

SMART INPUT/OUTPUT CONTACTS

Convenient connectors are available as standard in all indoor units, to realize some convenient operations on field with other building appliances depending on users' needs. Available contacts are on/off as input to indoor units and alarm as output.

1-WAY CASSETTE

Q1DN-2-XMi D18÷D71




ONLY 153 MM HIGH

The slim, compact design make the One-way Cassette ideal for interiors with limited ceiling space. Models 18 to 36 are just 153 mm high whilst models 45 to 71 are 189 mm high.



HIGH-LIFT DRAIN PUMP

A drain pump with a 750 mm pump head is fitted as standard.

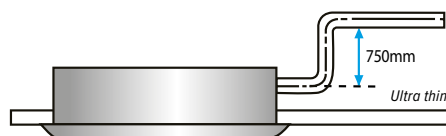

FRESH AIR INTAKE

A reserved outside air intake port allows outdoor air to be introduced directly into the unit for sizes from D45 to D71, negating the need for a separate ventilation system.



technical data

Q1DN-2-XMi D18÷D71



1-WAY CASSETTE

Size	Q1DN-2-XMi	D18	D22	D28	D36	D45	D56	D71	
Cooling ⁽¹⁾	Capacity	kW	1,8	2,2	2,8	3,6	4,5	5,6	7,1
	Power input	W	25	25	30	30	40	48	60
Heating ⁽²⁾	Capacity	kW	2,2	2,6	3,2	4,0	5,0	6,3	8,0
	Power input	W	25	25	30	30	40	48	60
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32
Main body	Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	1054x153x425	1054x153x425	1054x153x425	1054x153x425	1275x189x450	1275x189x450	1275x189x450
	Weight	kg	11,8	11,8	12,3	12,3	16,1	16,4	17,6
Panel	Dimensions (Width x Height x Depth)	mm	1180x25x465	1180x25x465	1180x25x465	1180x25x465	1350x25x505	1350x25x505	1350x25x505
	Weight	kg	3,5	3,5	3,5	3,5	4	4	4
Air flow rate ⁽³⁾		m ³ /h	380/355/330	380/355/330	460/440/410	460/440/410	693/662/638	792/763/728	933/873/815
			300/286	300/286	380/355	380/355	600/556	688/643	749/689
Sound pressure level ⁽³⁾⁽⁴⁾		dB(A)	30/28/27/26	30/28/27/26	37/36/35/34	38/37/35/34	39/37/36/35	41/39/38/37	43/41/40/39
			25/24/22	25/24/22	32/31/30	32/31/30	34/32/31	36/35/33	37/36/35
Sound power level ⁽³⁾⁽⁴⁾		dB(A)	44/42/41/40	44/42/41/40	51/50/49/48	52/51/49/48	53/51/50/49	55/53/52/51	57/55/54/53
			39/38/36	39/38/36	46/45/44	46/45/44	48/46/45	50/49/47	51/50/49
Power supply		V/Ph/Hz	220-240/1/50						

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D Wireless remote controller
WDC-86E/KD Compact wired controller
WDC-120G/WK Wired controller

MBQ1-02D Panel 1-way (sizes D18÷D36)
MBQ1-01D Panel 1-way (sizes D45÷D71)

2-WAY CASSETTE

Q2DN-2-XMi D22÷D71



LOW SOUND LEVEL


The Two-way Cassette's optimized, low resistance air outlets reduce noise levels to as low as 24 dB(A).

HIGH AIRFLOW

A high airflow rate ensures even airflow and temperature throughout the room, even in high ceiling installations.

HIGH-LIFT DRAIN PUMP

A drain pump with a 750 mm pump head is fitted as standard.



FRESH AIR INTAKE

A reserved outside air intake port allows outdoor air to be introduced directly into the unit, negating the need for a separate ventilation system.



technical data

Q2DN-2-XMi D22÷D71



2-WAY CASSETTE

Size	Q2DN-2-XMi	D22	D28	D36	D45	D56	D71	
Cooling ⁽¹⁾	Capacity	kW	2,2	2,8	3,6	4,5	5,6	7,1
	Power input	W	35	40	40	50	69	98
Heating ⁽²⁾	Capacity	kW	2,6	3,2	4	5	6,3	8
	Power input	W	35	40	40	50	69	98
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32
Main body	Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	1172x299x591	1172x299x591	1172x299x591	1172x299x591	1172x299x591	1172x299x591
	Weight	kg	33,5	33,5	33,5	35	35	35
Panel	Dimensions (Width x Height x Depth)	mm	1430x53x680	1430x53x680	1430x53x680	1430x53x680	1430x53x680	1430x53x680
	Weight	kg	10,5	10,5	10,5	10,5	10,5	10,5
Air flow rate ⁽³⁾	m ³ /h		654/612/571	654/612/571	725/679/641	850/792/731	980/925/855	1200/1115/1068
			530/488	530/488	591/554	670/631	800/755	1000/921
			449/410	449/410	509/458	592/550	702/670	808/770
Sound pressure level ⁽³⁾⁽⁴⁾	dB(A)		33/31/30/29	33/31/30/29	35/33/32/30	37/36/35/34	39/37/36/35	44/42/41/40
			27/25/24	27/25/24	29/27/25	32/31/30	33/31/30	38/36/34
Sound power level ⁽³⁾⁽⁴⁾	dB(A)		49/47/46/45	49/47/46/45	51/49/48/46	53/52/51/50	55/53/52/51	60/58/57/56
			43/41/40	43/41/40	45/43/41	48/47/46	49/47/46	54/52/50
Power supply	V/Ph/Hz	220-240/1/50						

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D Wireless remote controller
WDC-86E/KD Compact wired controller

WDC-120G/WK Wired controller
CE-MBQ2-01 Panel 2-way

COMPACT 4-WAY CASSETTE


Q4AN-2-XMi D17÷D52



COMPACT DESIGN, EASY INSTALLATION

Extremely compact casing suits any room's decor and requires little space for installation on a low ceiling.

Due to the compact body and light weight, all models can be installed without a hoist.




PANEL DESIGN

The panel design provide strong airflow circulation to cool or heat every corner of a room and evenly control temperature.



HIGH-LIFT DRAIN PUMP

A drain pump with a 500 mm pump head is fitted as standard.



FRESH AIR INTAKE

A reserved outside air intake port allows outdoor air to be introduced directly into the unit, negating the need for a separate ventilation system.



technical data

Q4AN-2-XMi D17-D52



4-WAY COMPACT CASSETTE

Size		Q4AN-2-XMi	D17	D22	D28	D36	D45	D52
Cooling ⁽¹⁾	Capacity	kW	1,7	2,2	2,8	3,6	4,5	5,2
	Power input	W	35	35	35	40	50	62
Heating ⁽²⁾	Capacity	kW	2,2	2,4	3,2	4,0	5,0	5,6
	Power input	W	35	35	35	40	50	62
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7
	Drain pipe	mm	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25
Main body	Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	630x260x570	630x260x570	630x260x570	630x260x570	630x260x570	630x260x570
	Weight	kg	17	17	17	18	18	18
Panel	Dimensions (Width x Height x Depth)	mm	647x50x647	647x50x647	647x50x647	647x50x647	647x50x647	647x50x647
	Weight	kg	2,5	2,5	2,5	2,5	2,5	2,5
Air flow rate ⁽³⁾		m ³ /h	380/345/313	414/380/345	414/380/345	521/485/450	521/485/450	635/580/481
			300/288	313/288	313/288	409/380	409/380	446/410
Sound pressure level ⁽³⁾⁽⁴⁾		dB(A)	35/34/33/29	35/34/33/29	35/34/33/29	41/38/35/32	41/38/35/32	52/48/35/32
			26/23/22	26/23/22	26/23/22	30/29/28	30/29/28	30/29/28
Sound power level ⁽³⁾⁽⁴⁾		dB(A)	51/50/49/45	51/50/49/45	51/50/49/45	56/53/50/47	56/53/50/47	60/55/50/47
			42/39/38	42/39/38	42/39/38	45/44/43	45/44/43	45/44/43
Power supply		V/Ph/Hz	220-240/1/50					

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D Wireless remote controller
WDC-86E/KD Compact wired controller

WDC-120G/WK Wired controller
CE-MBQ4-03B5 Panel 4-way compact

4-WAY CASSETTE

Q4DN-2-XMi D28÷D140



EASY TROUBLESHOOTING

By adding digital tube on the display board, Error Codes can be displayed directly for troubleshooting.



SUB DUCT

Connecting a sub-duct enables an indoor unit to be used to also cool a smaller nearby space.




NEW PANEL DESIGN

The panel design provide strong airflow circulation to cool or heat every corner of a room and evenly control temperature.



HIGH-LIFT DRAIN PUMP

A drain pump with a 750 mm pump head is fitted as standard.



FRESH AIR INTAKE

A reserved outside air intake port allows outdoor air to be introduced directly into the unit, negating the need for a separate ventilation system.



technical data

Q4DN-2-XMi D28÷D140



4-WAY CASSETTE

Size		Q4DN-2-XMi	D28	D36	D45	D56	D71	D80	D90	D100	D112	D140
Cooling ⁽¹⁾	Capacity	kW	2,8	3,6	4,5	5,6	7,1	8	9	10	11,2	14
	Power input	W	25	25	31	31	46	48	75	75	75	94
Heating ⁽²⁾	Capacity	kW	3,2	4	5	6,3	8	9	10	11	12,5	16
	Power input	W	25	25	31	31	46	48	75	75	75	94
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32
Main body	Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	840x230 x840	840x230 x840	840x230 x840	840x230 x840	840x230 x840	840x230 x840	840x300 x840	840x300 x840	840x300 x840	840x300 x840
	Weight	kg	21,3	21,3	23,2	23,2	23,2	23,2	28,4	28,4	28,4	30,7
Panel	Dimensions (Width x Height x Depth)	mm	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950	950x70 x950
	Weight	kg	5,8	5,8	5,8	5,8	5,8	5,8	5,8	5,8	5,8	5,8
Air flow rate ⁽³⁾		m ³ /h	801/751	801/751	893/866	893/866	977/937	1203/1131	1349/1294	1700/1600	1700/1600	1800/1650
			711/658	711/658	804/744	804/744	864/800	1064/977	1230/1201	1440/1250	1440/1250	1500/1300
			637/611	637/611	714/698	714/698	778/738	912/840	1111/1029	1200/1150	1200/1150	1250/1200
Sound pressure level ⁽³⁾⁽⁴⁾		dB(A)	32/31/30	32/31/30	35/34/31	35/34/31	35/35/34	36/35/34	37/35/34	43/42/40	43/42/40	45/44/42
			28/28	28/28	31/30	31/30	31/30	31/31	31/31	38/37	38/37	41/40
			26/23	26/23	28/26	28/26	28/27	29/28	30/28	35/34	35/34	39/37
Sound power level ⁽³⁾⁽⁴⁾		dB(A)	47/46/45	47/46/45	50/49/46	50/49/46	50/49/47	52/49/48	53/49/48	58/57/55	58/57/55	60/59/57
			43/43	43/43	46/45	46/45	47/45	46/46	46/46	53/52	53/52	56/55
			41/39	41/39	42/40	42/40	42/41	42/42	44/43	50/49	50/49	54/52
Power supply		V/Ph/Hz	220-240/1/50									

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D Wireless remote controller
WDC-86E/KD Compact wired controller

WDC-120G/WK Wired controller
T-MBQ4-01E Panel 4-way


MEDIUM STATIC PRESSURE DUCT

CNT2-2-XMi D17÷D140




COMPACT DESIGN

Models 22 to 71 are just 210 mm high whilst models 80 to 112 are 270 mm high and model 140 is 300 mm high, all easily positioned in the false ceiling.




HIGH-LIFT DRAIN PUMP

A drain pump with a 750 mm pump head is fitted as standard, simplifying installation of the drain piping.




FLEXIBILITY

To provide the flexibility to adapt to differing installation situations, the air inlet may be positioned either on the underside or the rear of the unit.

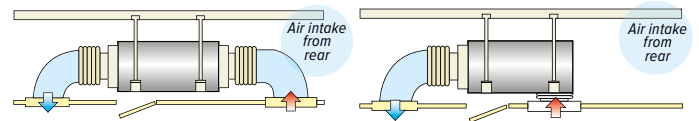

STATIC PRESSURE 10 STEPS CONTROL

Depending on the installation environment, units can be precisely set among 10 different steps of static pressure/airflow rate combinations, providing comfortable environment suitable for any application.



technical data

CNT2-2-XMi D17÷D140



MEDIUM STATIC PRESSURE DUCT

Size		CNT2-2-XMi	D17	D22	D28	D36	D45	D56	D71	D80	D90	D112	D140
Cooling ⁽¹⁾	Capacity	kW	1,7	2,2	2,8	3,6	4,5	5,6	7,1	8,0	9,0	11,2	14
	Power input	W	40	40	40	45	92	92	98	110	120	200	250
Heating ⁽²⁾	Capacity	kW	2,2	2,6	3,2	4,0	5,0	6,3	8,0	9,0	10	12,5	15,5
	Power input	W	40	40	40	45	92	92	98	110	120	200	250
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25
Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	780x210 x500	780x210 x500	780x210 x500	780x210 x500	1000x210 x500	1000x210 x500	1220x210 x500	1230x270 x775	1230x270 x775	1230x270 x775	1230x270 x775	1290x300 x865
Weight	kg	18	18	18	18	21,5	21,5	27,5	36,5	37	37	37	46,5
Air flow rate ⁽³⁾		m ³ /h	490/480 440/400 360/330 300	520/480 440/400 360/330 300	520/480 440/400 360/330 300	580/540 500/460 430/400 370	800/740 680/620 540/480 400	830/760 720/680 640/600 560	1000/960 900/840 780/720 680	1260/1180 1100/1020 940/860 780	1260/1180 1100/1020 940/860 780	1500/1430 1360/1290 1210/1140 1080	1960/1860 1760/1660 1560/1460 1360
	External static pressure	Pa	10 (0~50) 32/31/29	10 (0~70) 32/31/29	10 (0~70) 32/31/29	10 (0~70) 33/32/31	10 (0~70) 36/34/32	10 (0~70) 36/34/33	10 (0~70) 37/35/33	20 (10~100) 37/35/34	20 (10~100) 37/35/34	20 (10~100) 39/38/38	40 (30~150) 41/39/38
	Sound pressure level ^{(3) (4)}	dB(A)	28/26 25/23	28/26 25/23	28/26 25/23	30/28 27/25	31/29 27/25	32/30 29/28	32/30 29/28	33/31 29/28	33/31 29/28	33/31 29/28	37/35 34/33
Sound power level ^{(3) (4)}	dB(A)	50/49/47 46/44 43/41	50/49/47 46/44 43/41	50/49/47 46/44 43/41	51/50/49 48/46 45/43	54/52/50 49/47 45/43	54/52/51 50/48 47/46	55/53/51 50/48 47/46	55/53/52 51/49 47/46	55/53/52 51/49 47/46	55/53/52 51/49 47/46	57/56/56 55/53 52/51	59/57/56 55/54 53/51
Power supply	V/Ph/Hz	220-240/1/50											

Data measured at standard external static pressure.

- Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.
- Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

- RM12D Wireless remote controller
- WDC-86E/KD Compact wired controller
- WDC-120G/WK Wired controller


HIGH STATIC PRESSURE DUCT

CN-2-XMi D71÷D560




FLEXIBLE DUCT DESIGN

The High Static Pressure Duct indoor unit offers external static pressures of up to 400 Pa allowing air supply duct lengths of up to 14 m at a height of 6,5 m. With a height of just 420 mm (units D71 to D160), only 450 mm of ceiling space is required.

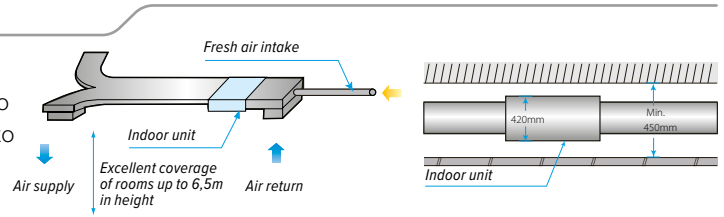

DOUBLE-SKIN DRAINAGE PAN

A double-skin drainage pan provides double protection for ceilings (units D71 to D160).



EASY INSTALLATION

Flanges for air inlet/outlet ducts are fitted as standard on the High Static Pressure Duct. On units D71 to D160, the expansion valve is fitted inside the unit, requiring no extra connection.

STATIC PRESSURE WITH 20 STEPS CONTROL

Depending on the installation environment, units can be precisely set up to 20 steps of static pressure/airflow rate combinations via wired remote controller, providing comfortable environment suitable for any application.



20 steps static pressure control

technical data

CN-2-XMi D71÷D560



HIGH STATIC PRESSURE DUCT

Size	CN-2-XMi	D71	D80	D90	D112	D140	D160	D200	D250	D280	D400	D450	D560	
Cooling ⁽¹⁾	Capacity	kW	7,1	8,0	9,0	11,2	14,0	16,0	20,0	25,0	28,0	40	45	56
	Power input	W	180	180	220	380	420	700	990	1200	1200	1800	1800	2272
Heating ⁽²⁾	Capacity	kW	8,0	9,0	10,0	12,5	16,0	17,0	22,5	26,0	31,5	45	56	63
	Power input	W	180	180	220	380	420	700	990	1200	1200	1800	1800	2272
Pipe connections	Liquid pipe	mm	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9
	Gas pipe	mm	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 22,2	Ø 22,2	Ø 22,2	Ø 28,6	Ø 28,6	Ø 28,6
	Drain pipe	mm	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 25	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32	OD Ø 32
Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	965×423 ×690	965×423 ×690	965×423 ×690	965×423 ×690	1322×423 ×691	1322×423 ×691	1454×515 ×931	1454×515 ×931	1454×515 ×931	2010×680 ×905	2010×680 ×905	2010×680 ×905	
Weight	kg	41	41	51	51	63	63	130	130	130	210	210	218	
Air flow rate ⁽³⁾		m ³ /h	1360/1327	1360/1327	1420/1373	1870/1783	2240/2133	2660/2530	4330/4230	4330/4230	4330/4230	6500/6150	6500/6150	7400/7000
		m ³ /h	1293/1260	1293/1260	1327/1280	1697/1610	2027/1920	2400/2270	4130/4030	4130/4030	4130/4030	5800/5450	5800/5450	6600/6200
		m ³ /h	1227/1193	1227/1193	1233/1187	1523/1437	1813/1707	2140/2010	3930/3830	3930/3830	3930/3830	5100/4750	5100/4750	5800/5400
External static pressure		Pa	100	100	100	100	100	100	170	170	170	300	300	300
		Pa	(30**200)	(30**200)	(30**200)	(30**200)	(30**200)	(30**200)	(20**250)	(20**250)	(20**250)	(100**400)	(100**400)	(100**400)
		Pa	42/41/40	42/41/40	45/44/43	48/47/46	45/44/43	46/45/44	51/50/50	51/50/50	51/50/50	60/59/58	60/59/58	59/58/57
Sound pressure level ⁽³⁾⁽⁴⁾		dB(A)	40/39	40/39	42/41	45/43	42/41	43/42	49/49	49/49	49/49	57/55	57/55	56/55
		dB(A)	39/38	39/38	40/39	42/41	40/40	41/40	48/47	48/47	48/47	54/52	54/52	53/51
		dB(A)	60/59/58	60/59/58	63/62/61	66/65/64	63/62/61	64/63/62	69/68/68	69/68/68	69/68/68	78/77/76	78/77/76	77/76/75
Sound power level ⁽³⁾⁽⁴⁾		dB(A)	58/57	58/57	60/59	63/61	60/59	61/60	67/67	67/67	67/67	75/73	75/73	74/73
		dB(A)	57/56	57/56	58/57	60/59	58/58	59/58	66/65	66/65	66/65	72/70	72/70	71/69
Power supply	V/Ph/Hz	220-240/1/50												

Data measured at standard external static pressure.

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoortemperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D	Wireless remote controller
WDC-86E/KD	Compact wired controller
WDC-120G/WK	Wired controller

SBH-04	Drain pump (sizes D71÷D160)
SBH-05	Drain pump (sizes D200÷D560)


FRESH AIR PROCESSING UNIT

CNFA-2-XMi D125÷D140



100% FRESH AIR PROCESSING UNIT

Both fresh air filtration and heating/cooling can be achieved in a single system. Indoor units and the Fresh Air Processing Unit can be connected to the same refrigerant system, increasing design flexibility and greatly reducing total system costs.



FLEXIBLE DUCT DESIGN

The Fresh Air Processing unit offers external static pressures of up to 200Pa, allowing air supply duct lengths of up to 14 m at a height of 6,5 m.

THE COMFORT OF FRESH AIR


Enjoy the comfort and health benefits of fresh air being drawn into your working or living environment.

STATIC PRESSURE WITH 20 STEPS CONTROL

Depending on the installation environment, units can be precisely set up to 20 steps of static pressure/airflow rate combinations via wired remote controller, providing comfortable environment suitable for any application.

SUPPLY AIR TEMPERATURE CONTROL

While other VRF indoor units control the return air temperature as set point, the fresh air processing unit controls the supply air temperature as set point, in order to more precisely manage the outdoor fresh air and release it indoor.



technical data

CNFA-2-XMI D125÷D140



FRESH AIR PROCESSING UNIT

Size	CNFA-2-XMi	D125	D140	
Cooling ⁽¹⁾	Capacity	kW	12,5	14
	Power input	W	480	480
	Operating temperature range (DB)	°C	20 ~ 43	20 ~ 43
Heating ⁽²⁾	Capacity	kW	10,5	12
	Power input	W	480	480
	Operating temperature range (DB)	°C	-5 ~ 16	-5 ~ 16
Pipe connections	Liquid pipe	mm	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 25	OD Ø 25
Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	1322×423×691	1322×423×691	
Weight	kg	68	68	
Air flow rate ⁽³⁾	m ³ /h	2000/1917/1833 1750/1667 1583/1500	2000/1917/1833 1750/1667 1583/1500	
External static pressure	Pa	180 (30~200)	180 (30~200)	
Sound pressure level ⁽³⁾⁽⁴⁾	dB(A)	48/47/46 45/44/43/42	48/47/46 45/44/43/42	
Sound power level ⁽³⁾⁽⁴⁾	dB(A)	66/65/64 63/62/61/60	66/65/64 63/62/61/60	
Power supply	V/Ph/Hz	220-240/1/50		

Data measured at standard external static pressure.

- (1) Outdoor temperature 33°C DB/28°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.
- (2) Outdoor temperature 0°C DB/-2,9°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.
- (3) Data refer to the 7 fan speeds, in descending order.
- (4) Sound values are measured in a semi-anechoic room, at a position 1,4 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

The Fresh Air Processing Unit can be used either independently or in conjunction with other types of indoor unit. If used independently, the total capacity of the Fresh Air Processing Units must be between 50% and 100% of that of the outdoor units. If used in conjunction with other types of indoor unit, the total capacity of the Fresh Air Processing Units must not exceed 30% of that of the outdoor units and the total capacity of indoor units + Fresh Air Processing Units must be between 50% and 100% of that of the outdoor units .

accessories

- RM12D Wireless remote controller
- WDC-86E/KD Compact wired controller

- WDC-120G/WK Wired controller
- SBH-04 Drain pump (sizes D125-D140)

WALL-MOUNTED

GWMN-2-XMi D17÷D90




MODERN DESIGN

The elegant appearance enhance the aesthetics of any room and are suitable for a wide variety of installation space situations.

AUTO SWING LOUVER

Multiple louver positions and the auto swing ensure precise and flexible airflow control.




HIGH EFFICIENCY, LOW SOUND LEVEL

Advanced brushless DC fan motor operates highly efficiently without generating excessive noise, saving energy at the same time as providing a low-noise work or living space.

FLEXIBILITY

To increase installation flexibility, the expansion valve is fitted internally, increasing compactness, and the refrigerant outlet direction can be left, right or rear as the installation situation requires. A new fixing plate design speeds installation and provides extra stability.



OPTIMAL COMFORT THROUGH BETTER FLOW CONTROL

A 2000-stage element mechanical expansion valve ensures precise flow control whilst generating little modulation noise. A multi-blade fan coupled with a dual-blade air guide smooth output airflow and three fan speeds provide flexibility to respond to users' particular comfort requirements.

technical data

GWMN-2-XMi D17÷D90



WALL MOUNTED

Size		GWMN-2-XMi	D17	D22	D28	D36	D45	D56	D71	D80	D90
Cooling ⁽¹⁾	Capacity	kW	1,7	2,2	2,8	3,6	4,5	5,6	7,1	8	9
	Power input	W	28	28	28	30	40	45	55	55	82
Heating ⁽²⁾	Capacity	kW	2,2	2,4	3,2	4	5	6,3	8	9	10
	Power input	W	28	28	28	30	40	45	55	55	82
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16
Dimensions (Width x Height x Depth) ⁽⁵⁾		mm	835x280x203	835x280x203	835x280x203	990x315x223	990x315x223	990x315x223	1194x343x262	1194x343x262	1194x343x262
Weight		kg	8,4	8,4	9,5	11,4	12,8	12,8	17	17	17
Air flow rate ⁽³⁾			411/402/393	422/411/402	417/402/386	656/628/591	594/563/535	747/713/685	1195/1130/1065	1195/1130/1065	1421/1300/1125
			385/378	393/380	370/353	573/544	507/478	648/613	1005/940	1005/940	1067/1005
			368/356	368/356	338/316	515/488	450/424	578/547	875/809	875/809	934/867
Sound pressure level ⁽³⁾⁽⁴⁾			31/30/30	31/30/30	31/30/30	33/32/32	35/34/33	38/37/36	44/43/42	44/43/42	48/46/45
			30/29	30/29	30/29	31/31	33/32	36/35	39/38	39/38	43/41
			29/29	29/29	29/29	30/30	31/31	34/34	37/36	37/36	40/38
Sound power level ⁽³⁾⁽⁴⁾			46/45/45	46/45/45	46/45/45	48/47/47	50/49/48	53/52/51	59/58/57	59/58/57	63/61/60
			45/44	45/44	45/44	46/46	48/47	51/50	54/53	54/53	58/56
			44/44	44/44	44/44	45/45	46/46	49/49	52/51	52/51	55/53
Power supply		V/Ph/Hz	220-240/1/50								

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1m in front and 1m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

- RM12D** Wireless remote controller
- WDC-86E/KD** Compact wired controller
- WDC-120G/WK** Wired controller



CEILING & FLOOR

DDLC-2-XMi D36÷D140



FLEXIBILITY

A sleek design suits installation either on the ceiling or floor, providing flexibility to accommodate a wide range of room designs.

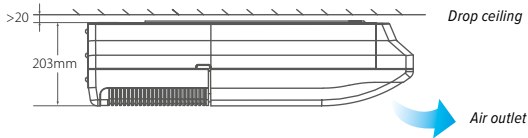

The unit can be installed either horizontally on the ceiling or vertically against the wall.

WIDE-ANGLE SWING

A wide-angle swing together with bi-directional louver swing allows the positioning of the unit to be selected to suit the room's decor, whilst ensuring that full-room cooling and heating coverage is achieved.



INCREASED COMFORT

Sound levels as low as 36dB(A) are achieved using electronic expansion valves which ensure precise flow control whilst generating little modulation noise. A multi-blade fan coupled with a dual-louver air guide smooth output airflow.

technical data

DDLC-2-XMi D36÷D140



CEILING & FLOOR

Size	DDLC-2-XMi	D36	D45	D56	D71	D80	D90	D112	D140	
Cooling ⁽¹⁾	Capacity	kW	3,6	4,5	5,6	7,1	8	9	11,2	14
	Power input	W	49	115	115	115	130	130	180	180
Heating ⁽²⁾	Capacity	kW/h	4	5	6,3	8	9	10	12,5	15
	Power input	W	49	115	115	115	130	130	180	180
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16
Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	990x660 x203	990x660 x203	990x660 x203	990x660 x203	1280x660 x203	1280x660 x203	1670x680 x244	1670x680 x244	
Weight	kg	27	28	28	28	35	35	48	48	
Air flow rate ⁽³⁾	m ³ /h	550/525/500	800/750/700	800/750/700	800/750/700	1280/1245/1210	1280/1245/1210	1890/1830/1765	1890/1830/1765	
		480/460 440/420	650/600 550/500	650/600 550/500	650/600 550/500	1170/1130 1085/1050	1170/1130 1085/1050	1700/1660 1620/1580	1700/1660 1620/1580	
Sound pressure level ⁽³⁾⁽⁴⁾	dB(A)	40/39/38	43/42/41	43/42/41	43/42/41	45/44/43	45/44/43	47/46/45	47/46/45	
		38/37/36/36	41/39/38/38	41/39/38/38	41/39/38/38	43/42/41/40	43/42/41/40	45/44/43/42	45/44/43/42	
Sound power level ⁽³⁾⁽⁴⁾	dB(A)	53/52/51 51/50/49/49	56/55/54 54/52/51/51	56/55/54 54/52/51/51	56/55/54 54/52/51/51	58/57/56 56/55/54/53	58/57/56 56/55/54/53	60/59/58 58/57/56/55	60/59/58 58/57/56/55	
Power supply	V/Ph/Hz	220-240/1/50								

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) FLOOR STANDING: Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1 m above the floor.

CEILING MOUNTED: Sound values are measured in a semi-anechoic room, at a position 1 m in front and 1 m below the unit.


(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

- RM12D** Wireless remote controller
- WDC-86E/KD** Compact wired controller
- WDC-120G/WK** Wired controller



FLOOR STANDING



FLEXIBILITY

The Floor Standing indoor unit can be installed on the floor or, for easier floor cleaning, hung on the wall with piping running from the rear. The streamlined appearance complements any room's decor.

CASING OPTIONS

At just 212 mm deep, the DZGF3B-XMi concealed floor standing unit can be installed around the perimeter of a room, hidden behind the skirting board, and special installation methods can be used to eliminate noise from the room space. The DZDF4-XMi (front air intake) and DZDF5-XMi (underside air intake) offer a choice of air intake options.



DZGF3B-XMi (concealed)



DZDF4-XMi (front air intake)



DZDF5-XMi (underside air intake)

INDOOR UNITS

technical data

DZGF3B-2-XMi D22÷D80



FLOOR STANDING

Size		DZGF3B-2-XMi	D22	D28	D36	D45	D56	D71	D80	
Cooling ⁽¹⁾	Capacity	kW	2,2	2,8	3,6	4,5	5,6	7,1	8	
	Power input	W	40	45	55	60	88	110	130	
Heating ⁽²⁾	Capacity	kW	2,4	3,2	4	5	6,3	8	9	
	Power input	W	40	45	55	60	88	110	130	
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53	
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9	
	Drain pipe	mm	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	
Dimensions (Width x Height x Depth) ⁽⁵⁾	mm	840x545x212	840x545x212	1036x545x212	1036x545x212	1340x545x212	1340x545x212	1340x545x212	1340x545x212	
Weight	kg	21	21	25,5	25,5	30,5	30,5	32		
Air flow rate ⁽³⁾		m ³ /h	530/504/478	569/540/515	624/591/557	660/625/583	1150/1094/1028	1380/1290/1205	1380/1290/1205	
			456/439	485/462	522/473	542/501	970/925	1100/1033	1100/1033	
Sound pressure level ⁽³⁾⁽⁴⁾		dB(A)	418/400	443/421	420/375	475/440	886/830	955/870	955/870	
			36/35/34/33	36/35/34/33	37/36/35/34	37/36/35/34	41/39/37	44/42/40	44/42/40	
Sound power level ⁽³⁾⁽⁴⁾		dB(A)	31/30/29	31/30/29	32/31/30	32/31/30	35/33/32/31	39/37/35/33	39/37/35/33	
			54/53/52/51	54/53/52/51	55/54/53/52	55/54/53/52	59/57/55	62/60/58	62/60/58	
Power supply	V/Ph/Hz		49/48/47	49/48/47	51/49/48	51/49/48	53/51/50/49	57/55/53/51	57/55/53/51	
			220-240/1/50							

Data are measured at 10 Pa external static pressure

(3) Data refer to the 7 fan speeds, in descending order.

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front and 1 m below the unit.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

technical data

DZDF4-2-XMi D22÷D80



FLOOR STANDING

Size		DZDF4B-2-XMi	D22	D28	D36	D45	D56	D71	D80
Cooling ⁽¹⁾	Capacity	kW	2,2	2,8	3,6	4,5	5,6	7,1	8
	Power input	W	40	45	55	60	88	110	130
Heating ⁽²⁾	Capacity	kW	2,4	3,2	4	5	6,3	8	9
	Power input	W	40	45	55	60	88	110	130
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16
Dimensions (Width x Height x Depth) ⁽⁵⁾		mm	1000x596x225	1000x596x225	1200x596x225	1200x596x225	1500x596x225	1500x596x225	1500x596x225
Weight		kg	28	28	33	33	40	40	41,5
Air flow rate ⁽³⁾	m ³ /h		530/504/478	569/540/515	624/591/557	660/625/583	1150/1094/1028	1380/1290/1205	1380/1290/1205
			456/439	485/462	522/473	542/501	970/925	1100/1033	1100/1033
Sound pressure level ⁽³⁾⁽⁴⁾	dB(A)		418/400	443/421	420/375	475/440	886/830	955/870	955/870
			36/35/34/33	36/35/34/33	37/36/35/34	37/36/35/34	41/39/37	44/42/40	44/42/40
Sound power level ⁽³⁾⁽⁴⁾	dB(A)		31/30/29	31/30/29	32/31/30	32/31/30	35/33/32/31	39/37/35/33	39/37/35/33
			54/53/52/51	54/53/52/51	55/54/53/52	55/54/53/52	59/57/55	62/60/58	62/60/58
Power supply		V/Ph/Hz	49/48/47	49/48/47	51/49/48	51/49/48	53/51/50/49	57/55/53/51	57/55/53/51
						220-240/1/50			

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front and 1 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

INDOOR UNITS

technical data

DZDF5-2-XMi D22÷D80



FLOOR STANDING

Size		DZDF5-2-XMi	D22	D28	D36	D45	D56	D71	D80
Cooling ⁽¹⁾	Capacity	kW	2,2	2,8	3,6	4,5	5,6	7,1	8
	Power input	W	40	45	55	60	88	110	130
Heating ⁽²⁾	Capacity	kW	2,4	3,2	4	5	6,3	8	9
	Power input	W	40	45	55	60	88	110	130
Pipe connections	Liquid pipe	mm	Ø 6,35	Ø 6,35	Ø 6,35	Ø 6,35	Ø 9,53	Ø 9,53	Ø 9,53
	Gas pipe	mm	Ø 12,7	Ø 12,7	Ø 12,7	Ø 12,7	Ø 15,9	Ø 15,9	Ø 15,9
	Drain pipe	mm	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16	OD Ø 16
Dimensions (Width x Height x Depth) ⁽⁵⁾		mm	1000x677x220	1000x677x220	1200x677x220	1200x677x220	1500x677x220	1500x677x220	1500x677x220
Weight		kg	28	28	33	33	40,4	40,4	41,5
Air flow rate ⁽³⁾	m ³ /h		530/504/478	569/540/515	624/591/557	660/625/583	1150/1094/1028	1380/1290/1205	1380/1290/1205
			456/439	485/462	522/473	542/501	970/925	1100/1033	1100/1033
Sound pressure level ⁽³⁾⁽⁴⁾	dB(A)		418/400	443/421	420/375	475/440	886/830	955/870	955/870
			36/35/34/33	36/35/34/33	37/36/35/34	37/36/35/34	41/39/37	44/42/40	44/42/40
Sound power level ⁽³⁾⁽⁴⁾	dB(A)		31/30/29	31/30/29	32/31/30	32/31/30	35/33/32/31	39/37/35/33	39/37/35/33
			54/53/52/51	54/53/52/51	55/54/53/52	55/54/53/52	59/57/55	62/60/58	62/60/58
Power supply		V/Ph/Hz	49/48/47	49/48/47	51/49/48	51/49/48	53/51/50/49	57/55/53/51	57/55/53/51
						220-240/1/50			

(1) Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(2) Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB. Piping length: Interconnecting piping length is 7,5 m, level difference is zero.

(3) Data refer to the 7 fan speeds, in descending order.

(4) Sound values are measured in a semi-anechoic room, at a position 1 m in front and 1 m below the unit.

(5) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

accessories

RM12D	Wireless remote controller
WDC-86E/KD	Compact wired controller
WDC-120G/WK	Wired controller

HIGH TEMPERATURE HYDRO MODULE

HWM-2-XMi 140




NEW

INTEGRATED HOT WATER PRODUCTION UP TO 80 °C

Specifically developed in combination with MV6R heat recovery series, High Temperature Hydro Module unit can produce hot water up to 80 °C to meet all possible demands: from space heating through underfloor heating, fan coils or radiators, to domestic hot water production.


Heat recovery series connection ensures all year round operation and to optimize system efficiency especially during summer season, allowing the simultaneous operation of the hydronic module producing domestic hot water and of indoor units cooling the rooms.

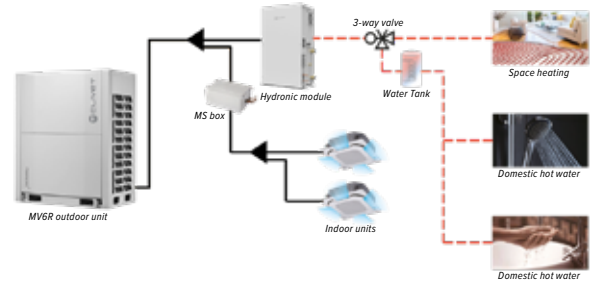

R134A CASCADE CIRCUIT


In order to raise water temperature supplied up to 80 °C, an independent R134a refrigerant circuit included in the unit is used:

- Within the main R410A refrigerant circuit common to the whole VRF system, the heat is taken from the ambient and diverted to the hydronic module through a plate heat exchanger;
- Inside the hydronic module, the heat transferred from the main circuit to the R134a cascade cycle is furtherly raised and released to the hydraulic circuit through another plate heat exchanger.

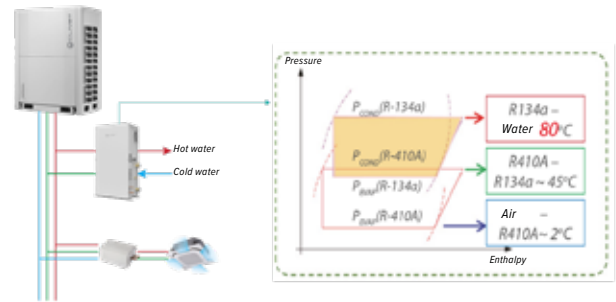

“FREE” HOT WATER PRODUCTION

Thanks to the heat recovery technology of the MV6R series, during the summer season it is possible to use the exhaust heat taken from the rooms through the indoor units operating in cooling mode and divert it to the hydro module for hot water production. Thus, it is sufficient to use the compressor included in the hydronic module to raise the thermal level and produce hot water with minimum power input.

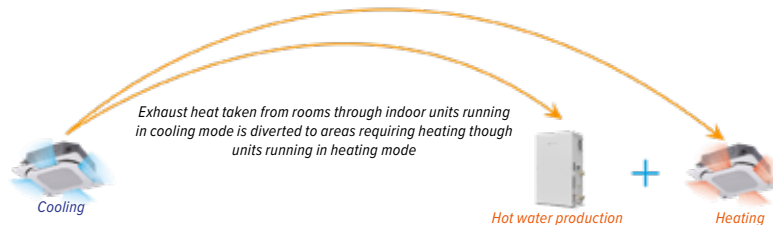


COMPACT AND LIGHT

The unit has been developed with a compact design to offer the minimum dimensions. The low weight further simplifies transportation and installation.



EXTENDED CONNECTIVITY UP TO 200%


In a mixed system composed of hydronic modules and indoor units it is possible to connect up to 200% of outdoor unit capacity, in order to fully benefit from the simultaneousness of cooling and heating loads.

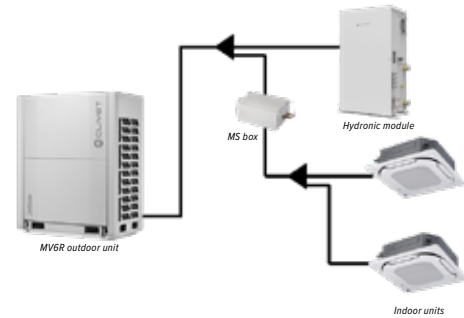

MV6R system		Capacity index
Hydronic module + VRF indoor units	Total capacity index	50%~200%
	Total VRF indoor units capacity index	50%~130%
	Total hydronic modules capacity index	0%~100%


OPTIMIZED CONNECTION

Hydronic module is connected to the refrigerant circuit on the main pipe before the MS box, avoiding occupying ports and allowing the connection of more indoor units.

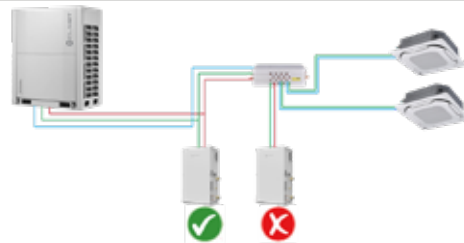


SUITABLE FOR MULTIPLE APPLICATIONS


• **Scenario 1:** space heating application with supply water temperature control.

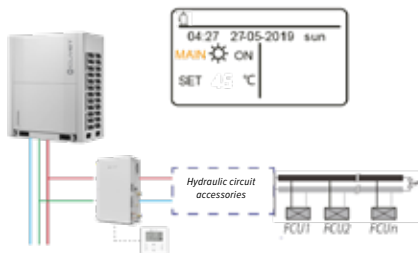


• **Scenario 2:** space heating application with room temperature control.

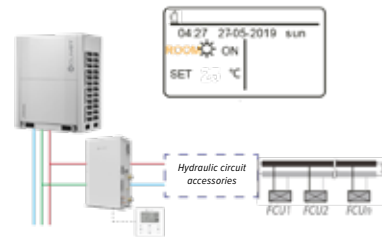


• **Scenario 3:** domestic hot water application with water tank temperature control.




• **Scenario 4:** domestic hot water application and space heating simultaneously.

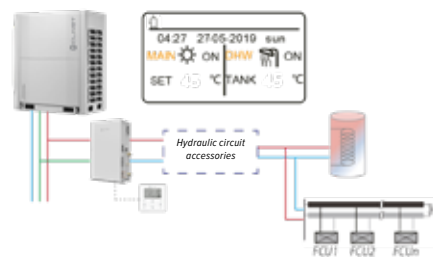

- **Scenario 5:** space heating application with multiple set point temperature for up to 3 zones management.

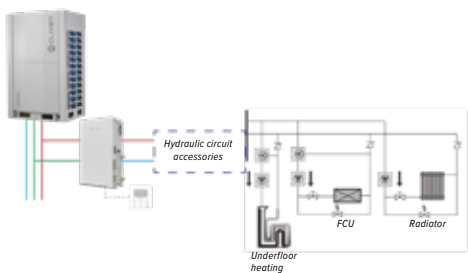


- **Scenario 6:** modular units configuration with group management and water tank temperature control.




MULTIPLE ADVANCED FUNCTIONS

- **Weekly timer and variable temperature set point:** several settings (set point, operating mode) are available to be scheduled to automate operations according to user's specific needs.

NO.	TIME	TEMP.
1	8:00	70 °C
2	12:00	60 °C
3	15:00	70 °C
4	18:00	60 °C
5	20:00	70 °C
6	23:00	60 °C

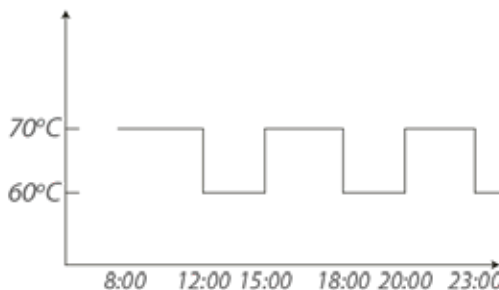

- **Weather temperature curve:** in space heating mode, supply water temperature is adjusted as function of the outdoor temperature, either when control is based on room temperature or on supply water temperature. Weather temperature curve can be modified according to user's preferences.

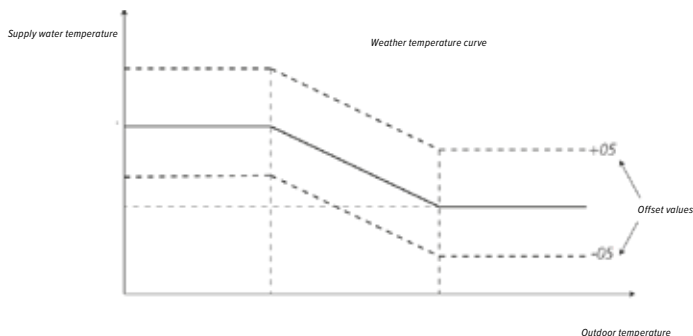

- **Disinfection mode:** in order to prevent the formation of legionella bacteria, a specific disinfection function has been designed, which can be scheduled to be performed regularly in specific days and hours.

DOMESTIC HOT WATER (DHW)


DISINFECT	DHW PUMP
CURRENT STATE	ON
OPERATION DAY	FRI.
START	23:00
<div style="display: flex; justify-content: center; align-items: center; gap: 10px;"> ⬆️ ⬇️ SCROLL </div>	

➔ CURRENT STATE=ON disinfection mode is activated

➔ Set when the disinfection mode is activated

➔ Set what time the disinfection mode is activated

- **DHW recirculating pump function:** in order to ensure the immediate supply of domestic hot water at any time, recirculating pump can be regularly activated in time periods settable by the wired controller.

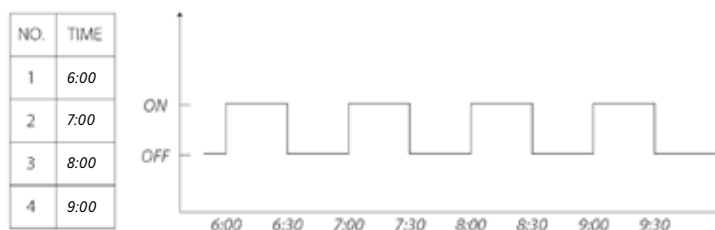

- **Silent mode:** whereas silence is a crucial requirement, noise levels of the unit can be limited in specific time periods or continuously.
- **Holiday mode:** holiday mode prevents frost formation inside the water circuit, keeping also possible schedules if needed.
- **Settings Lock** (on/off operating mode, set point temperature, maximum power input) by wired controller.
- **Parameters monitor and alarms** on wired controller.

Technical data

HWM-2-XMi 140



HIGH TEMPERATURE HYDRO MODULE

Size	HWM-2-XMi		140
Heating ⁽¹⁾	Capacity	kW	14
	Power input	kW	1,59
	Water temperature range	°C	25 ~ 80
	Operating ambient temperature range heating mode	°C	-20 ~ 30
	Operating ambient temperature range DHW mode	°C	-20 ~ 43
	Temperatura ambiente installazione	°C	0 ~ 40
Total capacity index ⁽²⁾	HTHM / ODU	-	0 ~ 100%
	IDU / ODU	-	50 ~ 130%
	(HTHM + IDU) / ODU	-	50 ~ 200%
Compressor	Type	-	Rotary DC Inverter
	Quantity	-	1
Refrigerant	Type	-	R-134a
	Factory charge	kg	1,2
Refrigerant pipe connections	CO ₂ equivalence	ton	1,72
	Liquid pipe	mm	Ø 9,53
Water pipe connections	Gas pipe	mm	Ø 12,7
	Inlet	mm	Ø 25,4
Dimensions (Width x Height x Depth)	Outlet	mm	Ø 25,4
	Weight	kg	63
Water flow rate nominal (Min. ~ Max.)	mm	mm	450x795x300
Water circuit pressure	m³/h	Mpa	2,4 (1,2 ~ 2,9)
Sound pressure level ⁽³⁾	0,1 ~ 0,3	dB(A)	43
Sound power level ⁽³⁾	dB(A)	54	
Power supply	v/Ph/Hz		220-240/1/50

(1) Outdoor air temperature 7°C DB/6°C WB; water inlet/outlet temperature 40°C/45°C, water flow rate 2,4 m³/h

(3) Sound values are measured in a semi-anechoic room, at a position 1 m in front of the unit and 1 m above the floor.

(2) ODU = Outdoor units; IDU = Indoor units; HTHM = High Temperature Hydro Module

accessories

(HTHM)WDC-120G/WK

Wired controller (already supplied with standard version)

HRV and PRIMARY AIR Units - Product Lineup

Features

Name	Series	Application	Recovery	Air Purification	Free Cooling	EC Fans	Variable Airflow	Temperature Control
HRV	HRV-2-Mi	local	passive	80%	✓	✓	-	-
	<i>NEW</i>							
	HRV-DX-2-XMi	local	passive	90%	✓	✓	-	Return
HRV - DX	<i>NEW</i>							
	HRV-DXL-2-XMi	local	passive	80/90%	✓	✓	-	Return
	AQX VRF Standard	central	passive	80%	✓	✓	-	Return
AQX VRF								
	AQX VRF Custom	central	passive	variable	✓	✓	-	Return
ZEPHIR ³	CPAN-XHE3	central	thermodynamic	99%	✓	✓	✓	Fixed point supply

HRV and PRIMARY AIR

Air Flow (m³/h)

200 300 400 500 800 1000 1300 1500 2000 2200 2300 3000 3100 5000 7500 10000 12500 15000 20000 48000

✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓

D200 - D300 - D400 - D500 - D800 - D1000 - D1500 - D2000

✓ ✓

D500 D1000

✓ ✓ ✓

D1500 D2300 D3100

✓ ✓ ✓ ✓ ✓ ✓ ✓

3000 - 5000 - 7500 - 10000 - 12500 - 15000 - 20000

✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓

500 m³/h ~ 48000m³/h

✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓

Size 1 - Size 2 - Size 3 - Size 4 - Size 5 - Size 6


HEAT RECOVERY VENTILATOR

HRV-2-Mi D200÷D2000




ENHANCED EFFICIENCY

The heat recovery ventilator (HRV) can greatly reduce energy losses and room temperature fluctuations caused by the ventilation process. The HRV's strong performance is a result of the advanced technology incorporated into its design. The heat exchanger core is made of specially treated paper which gives enhanced temperature and humidity control. Exchange efficiencies are over 80%.

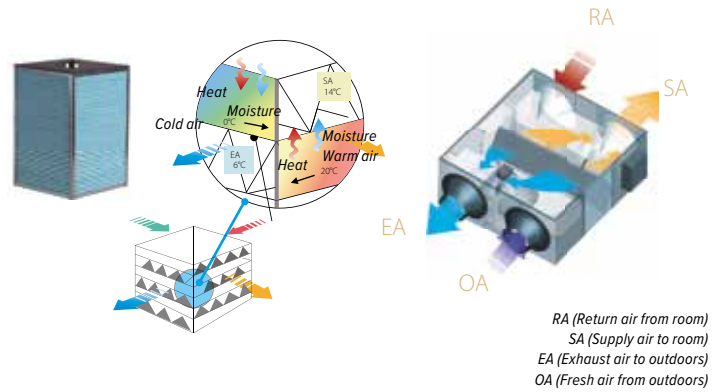

FLEXIBILITY

Heights starting from as little as 272 mm and weights from as little as 46 kg mean that the HRV can be easily installed even where space is limited.




LOW NOISE

Soundproofing is used to guarantee quiet operation.

MULTIPLE MODES

Heat exchange mode

The flows of incoming and outgoing air pass close to each other, allowing heat transfer between the two channels. During summer, incoming air is cooled by the indoor air being exhausted and in winter, incoming air is warmed.



Air supply mode


Air supply mode is a form of bypass mode where the supply fan is set to run faster than the exhaust fan, which is useful in mild climate installations with high fresh air ventilation requirements.

Auto mode

The controller chooses heat exchange mode or bypass mode according to the temperature difference between outdoors and indoors. Both fans are set to run at low speed.

Bypass mode

In mild climates or seasons, where temperature and humidity differences between indoors and outdoors are small, the HRV can work as a conventional ventilation fan. In standard bypass mode the supply and exhaust fans run at the same speed.

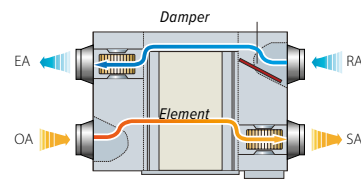

Exhaust mode

Exhaust mode is a form of bypass mode where the exhaust fan is set to run faster than the supply fan, which is useful in mild climate installations with large amounts of exhaust air to be expelled.

ECO-DESIGN


The unit complies with regulation (EU) 1253/2014 requirements for ventilation units.



FLEXIBLE CONTROL

NEW

The HRV unit can be controlled by its own command, or together with other indoor units by a centralized control.

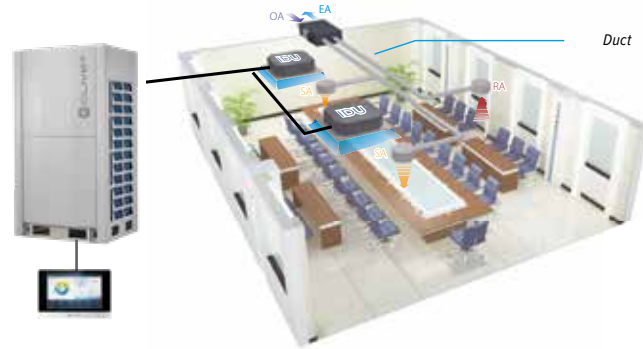

technical data

HRV-2-Mi D200÷D2000



HEAT RECOVERY VENTILATOR

Size	HRV-2-Mi	D200	D300	D400	D500	D800	D1000	D1500	D2000
Temperature exchange efficiency ⁽¹⁾	%	81,1	75,5	77,7	80,6	78,7	82,8	75,5	77,2
Enthalpy exchange efficiency ⁽¹⁾	%	77,5	72,1	73,5	74	72,3	76	69,4	74,7
Power supply wire	Wire's quantity	-	3	3	3	3	3	3	3
	Code wire cross section	mm ²	2,5	2,5	2,5	2,5	2,5	2,5	2,5
Input power	W	70	100	110	150	320	380	680	950
Current	A	0,64	0,84	0,97	1,2	2,4	2,9	3,8	5,7
Indoor external static pressure (Hi)	Pa	100	90	100	90	140	160	180	200
Nominal air flow	m ³ /h	200	300	400	500	800	1000	1500	2000
Sound power level ⁽²⁾	dB(A)	45	48	48	50	55	54	69	70
Dimensions (Width x Height x Depth)	mm	1195x272x801	1195x272x914	1276x272x1204	1311x390x1106	1311x390x1286	1311x390x1526	1740x615x1375	1811x685x1575
Weight	kg	46,5	56,5	71,5	76	80	90	181,5	208,5
Fresh Air Diameter	mm	Ø 144	Ø 144	Ø 198	Ø 244	Ø 244	Ø 244	Ø 346x326	Ø 346x326
Operating temperature range ⁽³⁾	°C	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43
Power supply	V/Ph/Hz	220-240/1/50-60							

For HRV-2-Mi D200~HRV-2-Mi D2000, there are 3-speed adjustable air-volume (Hi, Med, Low).

All the parameters are measured at the high speed air-volume.

(1) Temperature Exchange Efficiency is the mean value between cooling and heating
Cooling: air exhaust temp 27°C DB, 19.5°C WB; fresh air temp. 35°C DB, 28°C WB.
Heating: air exhaust temp 21°C DB, 13°C WB; fresh air temp. 5°C DB, 2°C WB.

(2) Sound level is measured 1,4 m below the center of the unit in an anechoic chamber.

(3) DB temperatures with 80% RH or less

accessories

KJR-27B

Wired controller

HRV and PRIMARY AIR

HRV-DX-2 HEAT RECOVERY VENTILATOR WITH DX COIL


HRV-DX-2-XMI D500-D1000



NEW


ENHANCED EFFICIENCY

Heat recovery ventilator with coil DX HRV-DX-2 combines technological advantages of enthalpic energy exchange between exhaust and supply air through a special core realized with pre-treated paper and of DX coil connected to VRF system to which is connected. Thus, the unit can both heat or cool and ventilate the rooms, improving both comfort and energy saving.

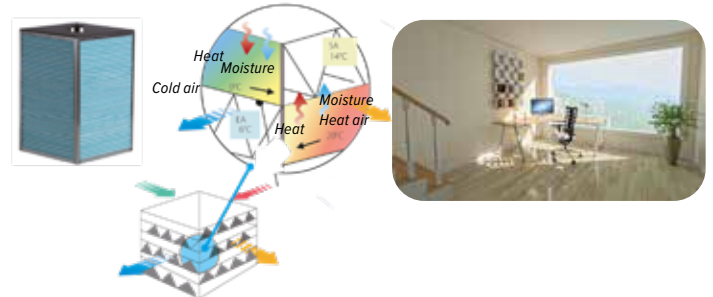

FLEXIBILITY

Due to a minimum height of 270 mm, the unit can be installed in limited false ceilings. As components are cabled and included in the unit, installation is simple as for other VRF indoor units since it is sufficient to perform electric and refrigerant connections with the system.



HIGH FILTRATION GRADE AND AIR QUALITY

The healthiness of the air and the minimum fouling of the exchanger are guaranteed by filters G3 and F9 on the supply section and G3 on the exhaust section, in order to increase the air quality supplied to the environment. For maximum air quality, the Bioxigen® purification system is available as an accessory, which allows, through a controlled bipolar ionization process, multiple benefits such as an antibacterial effect and the removal of odors, pollutants, mold and pollen.

BYPASS FOR FREE COOLING

During summer, when external temperatures are lower than internal, air is diverted, excluding the recovery, directly to the ambient, reducing the requested load of the installation and enhancing energy efficiency.

3 FAN SPEEDS

The unit is equipped with DC fan with 3 speeds available optimizing the air flow rate according to the requests.

CONTROLLER INCLUDED AND FLEXIBLE CONTROL

Wired controller to manage the unit is supplied with the unit.. Moreover, the unit is totally compatible with VRF control systems via centralized controls or BMS together with other indoor units of the system.



HRV and PRIMARY AIR



HRV-DX - HEAT RECOVERY VENTILATOR WITH DX COIL

Size	HRV-DX-2-XMi	D500	D1000	
Cooling ⁽¹⁾	Power	kW	3,0	5,8
	Input power	W	150	390
	Temperature exchange efficiency	%	76,0	76,0
	Enthalpy exchange efficiency	%	63,0	60,0
Heating ⁽²⁾	Power	kW	2,5	5,2
	Input power	W	150	390
	Temperature exchange efficiency	%	76,0	76,0
	Enthalpy exchange efficiency	%	67,0	62,0
Pipe connections	Liquid	mm	Ø 6,35	Ø 6,35
	Gas	mm	Ø 12,7	Ø 12,7
Nominal air flow	m ³ /h	500	1000	
External static pressure	Pa	90	115	
Sound pressure level ⁽³⁾	dB(A)	39	43	
Dimensions (Width x Height x Depth) ⁽⁴⁾	mm	1590x270x1000	1880x390x1320	
Weight	kg	90	105	
Fresh Air Diameter	mm	Ø 200	Ø 250	
Operating temperature range ⁽⁵⁾	°C	-15 - 40	-15 - 40	
Power supply	V/Ph/Hz	220-240/1/50-60		

(1) Powers calculated with inlet coil air 28,5°C DB, 50% UR. Exchange efficiencies calculated with outdoor temperature 32°C DB 50%UR; inlet air 26°C DB 50% UR.

(2) Powers calculated with inlet coil air 13°C DB, 40% UR. Exchange efficiencies calculated with outdoor temperature -5°C DB 80%UR; inlet air 20°C DB 50% UR.

(3) Sound values are measured at a position 1m from service side of casing, with ducted supply, exhaust, return and fresh air, at nominal conditions.

(4) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

(5) For outdoor temperatures below -5°C it is recommended that the unit is supplied with a pre-heater.

accessories

- WDC-86E/KD** Wired controller (already supplied with standard version)
- WDC-120G/WK** Wired controller
- BIOX-DX** Bioxygen purification system® (already supplied with standard version)
- PRE-DX-500** Electric pre-heater (size D500)
- PRE-DX-1000** Electric pre-heater (size D1000)

HRV-DXL-2 HEAT RECOVERY VENTILATOR WITH DX COIL

HRV-DXL-2-XMI D1500-D3100



NEW

ENHANCED EFFICIENCY

Heat recovery ventilator with coil DX HRV-DXL-2 combines technological advantages of enthalpic energy exchange between exhaust and supply air through a special core realized with pre-treated paper and of DX coil connected to VRF system to which is connected. Thus, the unit can both heat or cool and ventilate the rooms, improving both comfort and energy saving.



WIDER RANGE

In addition to the units of the HRV-DX-2 series with 500 and 1000 m³/h, the HRV-DXL-2 series can treat air flow rates up to 3100 m³/h, further expanding the offer of air handling units in combination with Clivet VRF systems.

HIGH FILTRATION GRADE AND AIR QUALITY

The healthiness of the air and the minimum fouling of the exchanger are guaranteed by filters F7 on the supply section and M5 on the exhaust section, in order to increase the air quality supplied to the environment. For maximum air quality, the Bioxigen® purification system is available as an accessory, which allows, through a controlled bipolar ionization process, multiple benefits such as an antibacterial effect and the removal of odors, pollutants, mold and pollen.

BYPASS FOR FREE COOLING


During summer, when external temperatures are lower than internal, air is diverted, excluding the recovery, directly to the ambient, reducing the requested load of the installation and enhancing energy efficiency.

3 FAN SPEEDS

The unit is equipped with DC fan with 3 speeds available optimizing the air flow rate according to the requests.

CONTROLLER INCLUDED AND FLEXIBLE CONTROL

Wired controller to manage the unit is supplied with the unit. Moreover, the unit is totally compatible with VRF control systems via centralized controls or BMS together with other indoor units of the system.

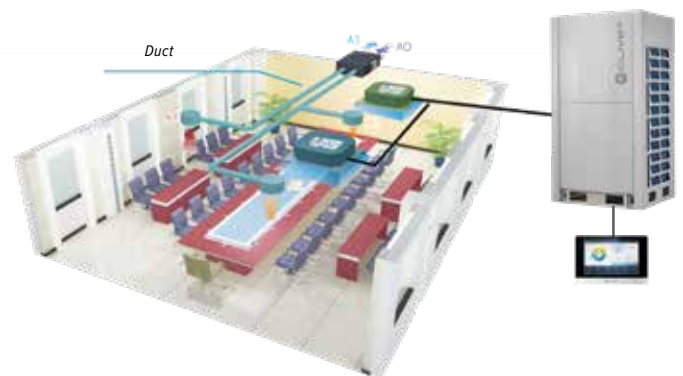

HRV and PRIMARY AIR



HRV-DXL-2 - HEAT RECOVERY VENTILATOR WITH DX COIL

Sizes		HRV-DXL-2-XMi	D1500	D2300	D3100
Cooling ⁽¹⁾	Power	kW	9,9	14,2	19,3
	Input power	kW	0,62	1,31	1,50
	Temperature exchange efficiency	%	60,1	60,2	57,4
	Enthalpy exchange efficiency	%	58,3	58,5	52,5
Heating ⁽²⁾	Power	kW	8,6	12,2	17,1
	Input power	kW	0,62	1,31	1,50
	Temperature exchange efficiency	%	73,0	73,2	71,4
	Enthalpy exchange efficiency	%	62,5	62,7	55,5
Pipe connections	Liquid	mm	Ø 9,53	Ø 9,53	Ø 9,53
	Gas	mm	Ø 15,9	Ø 15,9	Ø 15,9
Nominal air flow		m ³ /h	1500	2300	3100
External static pressure		Pa	190 / 520	210 / 425	190 / 370
Sound pressure level ⁽³⁾		dB(A)	53	59	58
Dimensions (Width x Height x Depth) ⁽⁴⁾		mm	2535x670x1290	2535x670x1290	2635x670x1400
Weight		kg	230	250	270
Fresh Air Diameter		mm	300x410, 230x260	500x410, 330x290	400x510, 330x285
Operating temperature range ⁽⁵⁾		°C	-15 - 45	-15 - 45	-15 - 45
Power supply		V/Ph/Hz		220-240/1/50-60	

(1) Powers calculated with inlet coil air 28,5°C DB, 50% UR. Exchange efficiencies calculated with outdoor temperature 32°C DB 50%UR; inlet air 26°C DB 50% UR.

(3) Sound values are measured at a position 1m from service side of casing, with ducted supply, exhaust, return and fresh air, at nominal conditions.

(2) Powers calculated with inlet coil air 13°C DB, 40% UR. Exchange efficiencies calculated with outdoor temperature -5°C DB 80%UR; inlet air 20°C DB 50% UR.

(4) Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments

(5) For outdoor temperatures below -5°C it is recommended that the unit is supplied with a pre-heater.

accessories

WDC-86E/KD

Wired controller (already supplied with standard version)

WDC-120G/WK

Wired controller

configurations

Model	Clivet code	Bioxigen purification system®	Electric pre-heater	Description
HRV-DXL-2-XMi D1500	AAWPG60001	-	-	Standard unit
	AAWPG60002	•	-	Bioxigen purification system® included unit
	AAWPG60003	-	•	Electric pre-heater included unit
	AAWPG60004	•	•	Bioxigen purification system® and electric pre-heater unit
HRV-DXL-2-XMi D2300	AAWPK60001	-	-	Standard unit
	AAWPK60002	•	-	Bioxigen purification system® included unit
	AAWPK60003	-	•	Electric pre-heater included unit
	AAWPK60004	•	•	Bioxigen purification system® and electric pre-heater unit
HRV-DXL-2-XMi D3100	AAWPK70001	-	-	Standard unit
	AAWPK70002	•	-	Bioxigen purification system® included unit
	AAWPK70003	-	•	Electric pre-heater included unit
	AAWPK70004	•	•	Bioxigen purification system® and electric pre-heater unit

AQX VRF


AQX VRF 3000÷20000



EFFICIENT AND FLEXIBLE

Direct expansion coil air handling units combine fresh air ventilation with the flexibility and air conditioning efficiency typical of Clivet VRF systems.

The unit is easy to install: thanks to the dedicated kit to manage air handling unit pre-cabled and included in AQX VRF, it is sufficient to connect it to VRF system from refrigerant and electrical point of view.

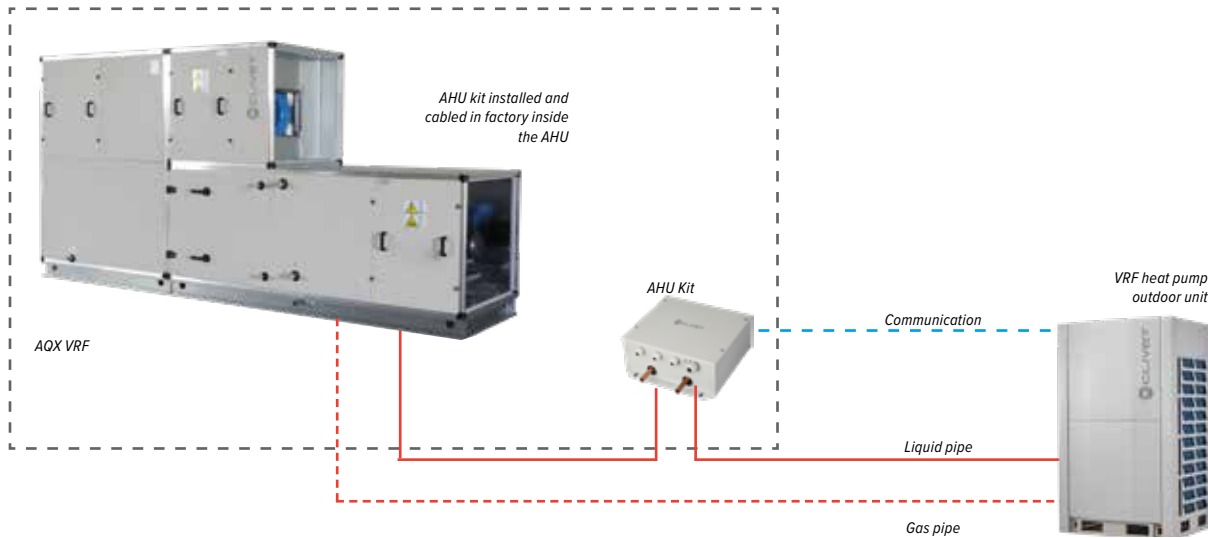


ONE SOLUTION, TWO POSSIBLE CONFIGURATIONS

Designed to control return air temperature, the solution is available in two versions:

- AQX VRF standard → 7 pre-defined configurations (3000, 5000, 7500, 10000, 12500, 15000, 20000 m³/h);
- AQX VRF custom → completely configurable based on specific project needs (airflow range 500-48000 m³/h, capacity 2,2-224 kW), with multiple accessories available.

AQX VRF air handling units are available in single configuration connected in a 1-to-1 combination to a dedicated VRF outdoor unit (A), or in multiple configuration with more AQX VRF units connected to the same VRF outdoor unit (B), or in mixed configuration with other VRF indoor units all managed by the same VRF outdoor unit (C).

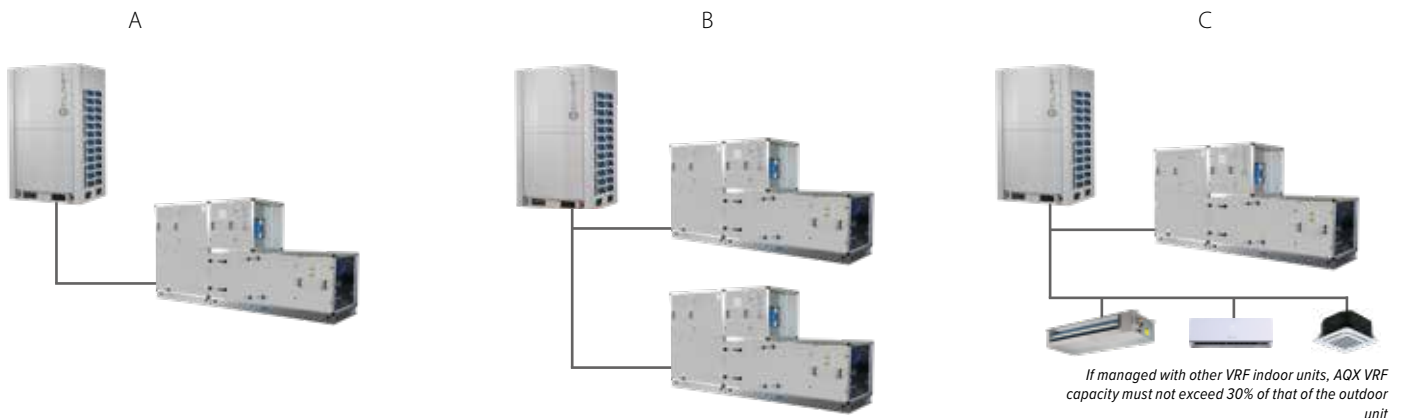


AQX VRF Standard

AQX VRF STANDARD COMBINATIONS WITH VRF OUTDOOR UNITS


AQX VRF standard units are designed to be coupled with Clivet VRF outdoor units with the following combinations:

Size	AQX VRF	3000	5000	7500	10000	12500	15000	20000
Outdoor unit		MSAN-XMi 180T	MSAN-XMi 260T / MV6-XMi 252T	MSAN-XMi 400T / MV6-XMi 400T	MV6-XMi 500T	MV6-XMi 615T	MV6-XMi 730T	MV6-XMi 850T

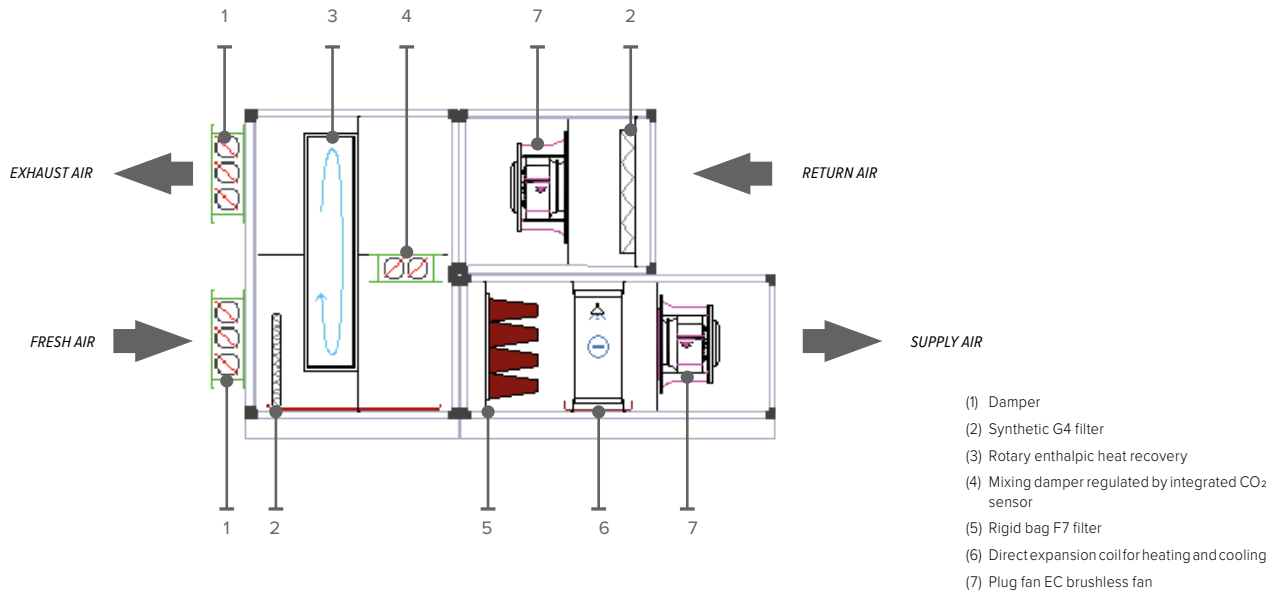

STRUCTURE

Frame is composed of profiles having 50x50 mm sections for its light weight and extra corrosion resistance, ensuring the best thermal break. Profiles are double chamber type so that fixing screws are totally to have the maximum seal. Closing panels are double skin type, with double sheet steel and insulation through polyurethane foam with gasket on all external perimeter for thermal break.

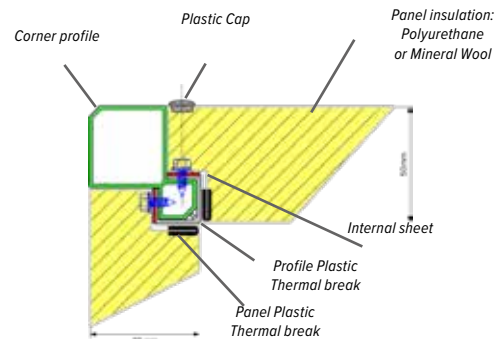

HRV and PRIMARY AIR

FILTERS

In order to provide quality of supply air, filter section is composed of synthetic G4 filters placed on exhaust and outdoor air sections and F7 rigid bag filter on supply air.



FANS

Supply and exhaust air fans are plug fan type, directly coupled to high efficiency EC brushless motor in order to ensure an external static pressure of 300 Pa.



ROTARY ENTHALPIC HEAT RECOVERY

Energy recovery from indoor exhaust air from is ensured by a rotary enthalpic heat recovery: in the first half of rotation, the sensible and latent heat is transferred to the heat-adsorbing materials of the wheel and gives that energy in the second part of rotation to the side that has lower energy.

The rotary wheel is composed of a special hygroscopic aluminum matrix designed with a special distribution to increase sensible and latent heat transfer area and efficiency.



MIXING DAMPER WITH INTEGRATED CO₂ SENSOR

In addition to bypass damper, AQX VRF air handling units are equipped as standard with a mixing damper with integrated CO₂ sensor. As a result, fresh air airflow is mixed with exhaust air from indoor in a variable percentage depending on environmental air quality measured in CO₂ ppm.

Besides a better energy efficiency, this system facilitates system start-up, accelerating steady operation of the plant

INTEGRATED ELECTRICAL BOX

Electrical panel, complete with VRF outdoor unit control interface, is included and pre-cabled inside the AQX VRF unit, strongly simplifying installing operations.

technical data

AQX VRF 3000÷20000



AQX VRF STANDARD

Size	AQX VRF	3000	5000	7500	10000	12500	15000	20000	
Nominal air flow	m ³ /h	3000	5000	7500	10000	12500	15000	20000	
Air flow range	m ³ /h	2400-3000	4000-5000	6000-7500	8000-10000	10000-12500	12000-15000	16000-20000	
Max. available pressure	Pa	300	300	300	300	300	300	300	
Cooling ⁽¹⁾	DX coil capacity	kW	17,5	26	40	50	61,5	73	85
	Heat recovery capacity	kW	13	21,8	34,9	44,4	54,3	66,6	87,4
	Power input	kW	2,1	3,3	5,1	6,6	7,9	9,5	12,7
	Sensible exchange efficiency	%	73,3	73,5	77,9	73,9	73,4	74	73,5
Heating ⁽²⁾	DX coil capacity	kW	17,5	26	40	50	61,5	73	85
	Heat recovery capacity	kW	24,4	40,9	65,1	82,5	101,9	123,9	136,7
	Power input	kW	2,1	3,3	5,1	6,6	7,9	9,5	12,7
	Sensible exchange efficiency	%	73,3	73,5	77,9	73,9	73,4	74	73,5
Energy class	-	A+	A+	A+	A	A	A	A	
Dimensions (Width x Height x Depth) ⁽³⁾	mm	2790x1580x1070	2840x1980x1320	3040x1930x1570	3140x2130x1820	3290x2380x1970	3140x2530x2170	3290x2680x2470	
Weight	kg	484	662	772	931	1131	1267	1567	
Power supply	V/Ph/Hz	400/3/50							

(1) Indoor temperature 27°C DB/50% R.H.; Outdoor temperature 35°C DB/50% R.H.

(2) Indoor temperature 20°C DB/50% R.H.; Outdoor temperature -5°C DB/80% R.H.

(3) Height including base


(4) Some technical specifications may vary if components are updated. Please refer to the AHU data sheet supplied with your order.

THE MOST FLEXIBLE AIR HANDLING UNITS THAT CAN BE COMBINED WITH VRF

In addition to AQX VRF standard version, multiple variations are available with direct expansion coil capacity ranging from 2,2 to 224 kW and airflow rate between 1500 and 48000 m³/h, in combination with various accessories depending on specific design needs.

Possible customizations can concern:

- Fans and motors
- Heat recovery section
- Filters
- Humidifiers
- Pre-heating, post-heating auxiliary sections
- Internal panels
- Silencers
- Additional accessories

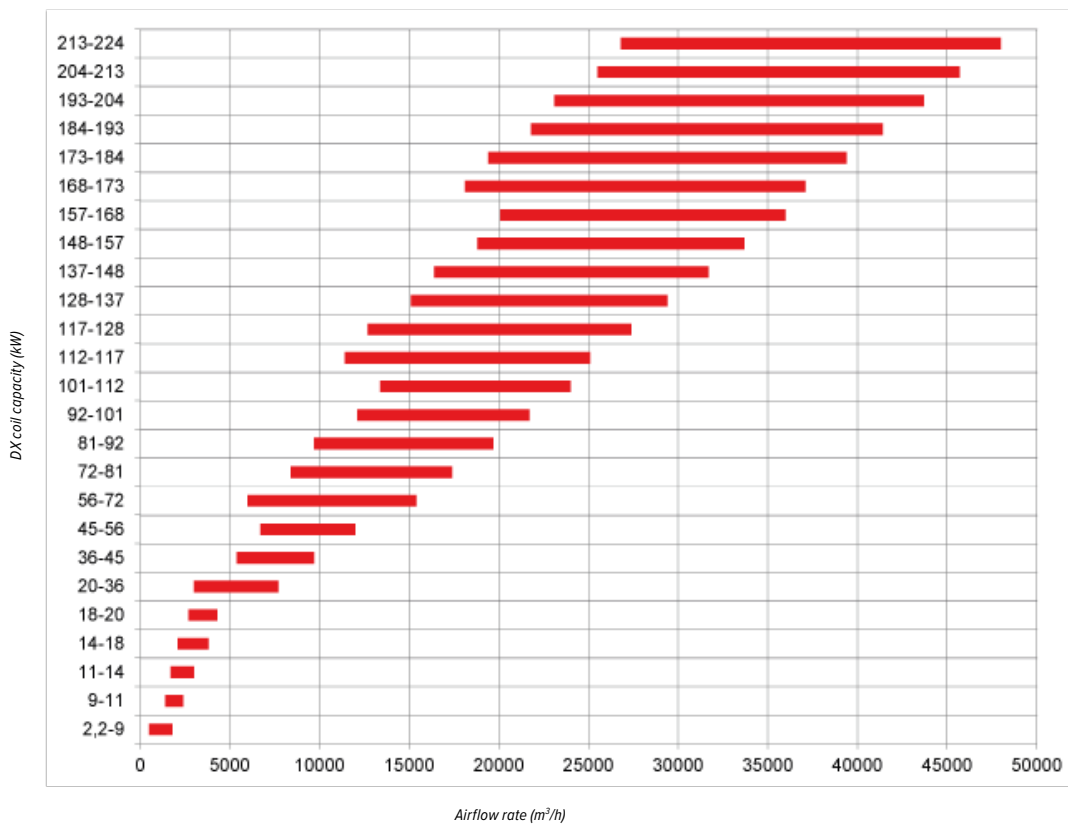

ZEPHIR³


CPAN-XHE3 SIZE 1÷SIZE 6



THE WHOLE PRIMARY AIR PLANT IN A SINGLE STAND-ALONE SYSTEM

ZEPHIR3 contains all the components required to operate perfectly. These have already been optimised and tested by Clivet to ensure 100% efficient and reliable results.

Built-in controls allow operation with constant supply temperature, at maximum available capacity, at high airflow. Central and local application.

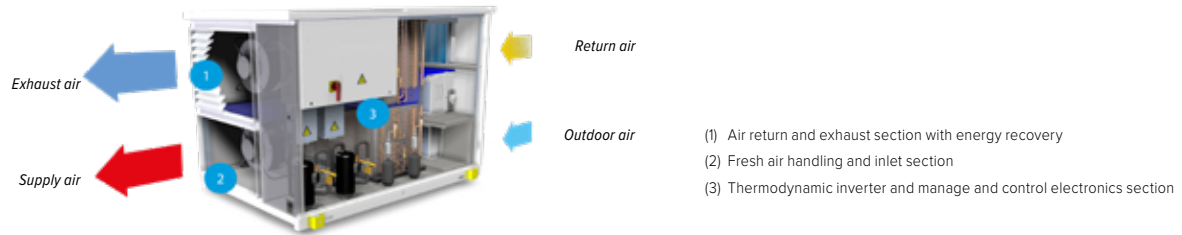

EFFICIENT AND RELIABLE

Reversible heat pump technology:

- Recovers energy from exhaust air, a heat source that is favourable and steady over time
- The active thermodynamic circuit produces capacity amplifying the energy contained in the exhaust air
- The capacity produced satisfies most of the whole system's demand
- Eliminate the waste typical of central systems, such as pumping, storage, thermal loss on the pipework
- 30% saving on ventilation


SELF CONTAINED. EASY

It autonomously produces heating and cooling capacity to handle Primary Air:

- No connection to external heating and cooling stations
- 80% less works on site
- Industrial product optimized and tested for maximum reliability of results

CONTINUOUS HUMIDITY CONTROL

The quality of the indoor air depends largely on humidity: one of Primary Air system's main tasks is to control it. In summer mode, ZEPHIR³ always dehumidifies outdoor air via the thermodynamic circuit. Therefore it corrects the temperature until it reaches the supply air desired value, free of charge, thanks to the post-heating modulating system with hot gas recovery. In winter mode, when required by the outdoor conditions and system application, ZEPHIR³ can humidify renewal air with the optional steam section, with immersed electrodes or steam-powered section.



NO CROSS CONTAMINATION

A resistant steel wall keeps the two flows separate. All the technological components are located in individual compartments that can be easily accessed for routine maintenance.

COMPACT

Requires 50% less space compared with a primary air handling unit at modular sections. It has already all the settings and power components.

NO WASTE FILTRATION

High efficiency electronic filters:

- Equivalent to the traditional H10
- Negligible pressure drops
- Savings on ventilation above 10% compared with conventional filters.



UNIFIED CONTROL ZEPHIR³+VRF

NEW

By providing the VRF gateway option, the Zephir³ units can be managed from the CCM270 centralized touchscreen control in addition to the VRF systems, to the benefit of plant management.



ZEPHIR³

Size	CPAN-XHE3		Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	
Operation with constant supply temperature	Standard airflow	Nominal air flow	l/s	361	611	1278	2000	2638	3333
		Nominal air flow	m ³ /h	1300	2200	4600	7200	9500	12000
		Max external static pressure (supply)	Pa	630	630	630	600	420	630
	Cooling	Max external static pressure (extraction)	Pa	630	630	630	630	540	630
		Total cooling capacity ⁽¹⁾	kW	10,6	17,5	38,7	58,4	79	95,9
		Re-heating capacity ⁽¹⁾	kW	2,74	4,23	11	15,2	21,7	23,4
		Compressor power input ⁽¹⁾	kW	2,91	4,92	11,1	15,7	20,4	23,2
		EER_C ⁽¹⁾	-	4,59	4,43	4,48	4,67	4,94	5,13
		Heating capacity ⁽²⁾	kW	5,93	10	21	32,9	43,4	54,9
	Heating	Compressor power input ⁽²⁾	kW	0,71	1,23	2,54	4,22	5,75	8,77
		COPc ⁽²⁾	-	8,38	7,45	8,28	7,8	7,55	6,26
Operation at maximum available capacity	Standard airflow	Nominal air flow	l/s	361	611	1278	2000	2638	3333
		Nominal air flow	m ³ /h	1300	2200	4600	7200	9500	12000
		Max external static pressure (supply)	Pa	630	630	630	600	420	630
	Cooling	Max external static pressure (extraction)	Pa	630	630	630	630	540	630
		Total cooling capacity ⁽³⁾	kW	10,6	17,5	38,7	58,4	79	95,9
		Re-heating capacity ⁽³⁾	kW	3,26	5,52	12,5	17,7	22,9	26,1
		Add. available capacity to space ⁽³⁾	kW	3,62	5,72	14,2	20	28,2	31,5
		EER_C ⁽³⁾	-	3,25	3,18	3,1	3,31	3,45	3,68
		Heating capacity ⁽⁴⁾	kW	10,5	17,8	37,1	58,2	76,8	96,9
	Heating	Compressor power input ⁽⁴⁾	kW	2,28	3,77	7,1	11,2	14,4	18,3
		COPc ⁽⁴⁾	-	4,61	4,72	5,21	5,2	5,33	5,29
Operation with high airflow	Maximum airflow	Nominal air flow	l/s	528	972	1944	2556	3194	3889
		Nominal air flow	m ³ /h	1900	3500	7000	9200	11500	14000
		Max external static pressure (supply)	Pa	630	470	630	450	345	630
	Cooling	Max external static pressure (extraction)	Pa	630	630	630	530	400	630
		Total cooling capacity ⁽⁵⁾	kW	9,2	18,2	31,9	45,1	62	80,6
		Compressor power input ⁽⁵⁾	kW	1,56	3,38	4,46	6,97	13,8	17,8
		EER_C ⁽⁵⁾	-	5,89	5,38	7,15	6,48	4,5	4,51
		Heating capacity ⁽⁶⁾	kW	6	11,1	22,1	29,1	36,3	44,2
		Compressor power input ⁽⁶⁾	kW	0,54	1,31	2,48	3,11	3,4	5,44
	Heating	COPc ⁽⁶⁾	-	11,1	8,46	8,94	9,36	10,7	8,14
Refrigeration circuits	Nr	1	1	2	2	2	2	2	
No. of compressors	Nr	1	1	2	2	3	3	3	
Type of compressors ⁽⁷⁾	-	ROT	SCROLL	SCROLL	SCROLL	SCROLL	SCROLL	SCROLL	
Type of supply fan ⁽⁸⁾	-	RAD	RAD	RAD	RAD	RAD	RAD	RAD	
Number of supply fans	Nr	1	1	1	1	1	2	2	
Fan diameter	mm	310	355	500	630	630	500	500	
Type of exhaust fan	-	RAD	RAD	RAD	RAD	RAD	RAD	RAD	
Number of exhaust fans	Nr	1	1	1	1	1	1	2	
Minimum air flow	l/s	278	444	917	1444	2083	2639	2639	
Minimum air flow	m ³ /h	1000	1600	3300	5200	7500	9500	9500	
Maximum air flow ⁽⁹⁾	l/s	528	972	1944	2556	3194	3889	3889	
Maximum air flow ⁽⁹⁾	m ³ /h	1900	3500	7000	9200	11500	14000	14000	
Sound pressure level ⁽¹⁰⁾	dB(A)	53	57	61	60	62	69	69	
Dimensions (Width x Height x Depth)	mm	1895x1025x950	1895x1625x950	2465x1810x1735	2465x2260x1735	2465x2260x2025	2465x2260x2330	2465x2260x2330	
Weight	kg	320	450	1070	1285	1450	1670	1670	
Power supply					400/3/50				

Erp (Energy Related Products) European Directive, that includes the Commission delegated Regulation (EU) No 2016/2281 also known as Ecodesign Lot21, does not report this Product category.

DB = dry bulb; WB = wet bulb; EERc = Thermodynamic efficiency of the system in cooling;

COPc = Thermodynamic efficiency of the system in heating

(1) Outdoor air temperature: 35°C D.B./24°C W.B.; Exhaust air temperature: 26°C D.B. Supply air humidity ratio: 11g/kg; Supply air temperature: 24°C D.B.

(2) Outdoor air temperature: 7°C D.B./6.0°C W.B. Exhaust air temperature: 20°C D.B./12°C W.B.; Supply air temperature: 20°C D.B.

(3) Outdoor air temperature: 35°C D.B./24°C W.B.; Exhaust air temperature: 26°C D.B. Supply air humidity ratio: 11g/kg

(4) Outdoor air temperature: 7°C D.B./6.0°C W.B. Exhaust air temperature: 20°C D.B./12°C W.B.; Supply air temperature: 28°C D.B.

(5) Outdoor air temperature: 35°C D.B./24°C W.B.; Exhaust air temperature: 26°C D.B. Supply air temperature: 22°C D.B.

(6) Outdoor air temperature: 7°C D.B./6.0°C W.B. Exhaust air temperature: 20°C D.B./12°C W.B.; Supply air temperature: 16°C D.B.

(7) ROT = rotary compressor; SCROLL = scroll compressor

(8) RAD = radial fan

(9) In case of use with high air flow only the maximum flow rate value is possible

(10) The sound pressure level is referred at a distance of 1 m from the ducted unit surface operating in free field conditions. External static pressure 50 Pa. Please note that when the unit is installed in conditions different from nominal test conditions (e.g. near walls or obstacles in general), the sound levels may undergo substantial variations. Sound levels refer to unit with standard air flow rate

versions, configurations and accessories

RTA	Active thermodynamic recovery (Standard)
RECH	Hydronic recovery device for extended operating range
EPWRC	EXTRAPOWER-C (with additional chilled water heat exchanger)
EPWRH	EXTRAPOWER-H (with additional hot water heat exchanger, without electronic filters)
CCA	Copper/aluminium exchanger on exhaust air with acrylic lining
CEA	Copper/aluminium exchanger on outdoor air with acrylic lining
PVARC	Variable air flow on supply and exhaust with CO ₂ probe
PVARCV	Variable air flow on supply and exhaust with CO ₂ +VOC probe
PVARP	Variable air flow on supply and exhaust air with supply pressure probe
MHSEX	Immersed electrodes steam humidifying module
MCHSX	Steam-powered humidifying module
MOB	Serial port RS485 with Modbus protocol
LON	Serial port RS485 with LonWorks protocol





















CPHGM	Refrigeration circuit with capacity modulation(Standard)
IO	Outdoor installation (Standard)
II	Indoor installation
BACIP	BACnet-IP serial communication module
VSXSA	Modification of the supply humidity ratio setpoint "X_SA"
DESM	Smoke detector
AMRX	Rubber antivibration mounts
AMRUX	Rubber antivibration mounts for unit and humidification module
RSSX	Remote supply air sensor
PTCO	Set up for shipping via container
F7	High efficiency F7 air filter (ISO 16980 ePM1 60%)
VRF	VRF Gateway

Control Systems - Product Lineup

Type

Individual controllers	Wireless	Wireless remote controller
	Wired	Wired controllers
Centralized controllers		Advanced centralized controllers
		Simplified centralized controllers
Network controls and gateways		Data cloud converter
		Network Control System
		BMS integration (Gateways)
Accessories		

CONTROL SYSTEMS

Name	
RM12D / RM12F	
WDC-86E/KD	
WDC-120G/WK	
CCM-180A/WS	
CCM-270A/WS	
CCM30-B	
Data Cloud Converter CCM15	
IMMPRO Software and Hardware	
IMM Software and Hardware	
BACnet Gateway GW-BAC / IMMP-BAC / IMMP-BAC(A) / CCM08	
LonWorks Gateway GW-LON / GW-LON(A) / LonGW64	
Modbus Gateway GW-MOD / GW-MOD(A) / CCM18A / CCM18ANU	
KNX Gateway GW-KNX / GW-KNX(A)	
XYE MA-EK extension kit	
Infrared Sensor Controller NIM09	
Remote sensor package RT01	
Digital Power Meter DTS634 / DTS634F	
Network Electricity Distribution Module NIM10	
Online kit MCAC-PIDU	
AHU Kit	


WIRELESS REMOTE CONTROLLER

BACKGROUND LIGHT

The background light allows users to operate the device in the dark. The device lights up when a button is pressed, and turns off when the selected operation is completed.


ADDRESS SETTING

In addition to the unit's auto addressing function, users can set the indoor unit's address on the wireless remote controller.




TEMPERATURE SETTING

Set temperature can be adjusted in 0.5°C or 1°C steps, enabling precise comfort control.

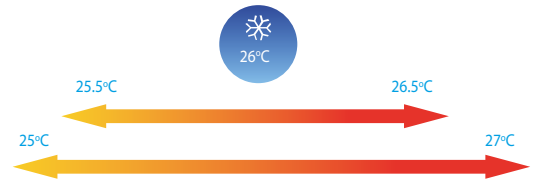

7-SPEED FAN CONTROL

7 indoor fan speeds provide control flexibility to meet the needs of different indoor conditions.

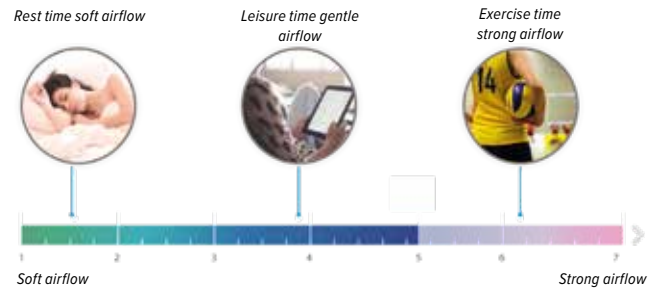


FOLLOW ME

With the follow me function, the indoor unit responds to the temperature measured by the temperature sensor built-in to the wireless remote controller, rather than the temperature sensor in the indoor unit itself, enabling more precise control of the temperature in the user's immediate environment.

5-STEP SWING LOUVER

The air is comfortably spread upwards and downwards thanks to the 5-step swing louver that can be programmed via the controller.

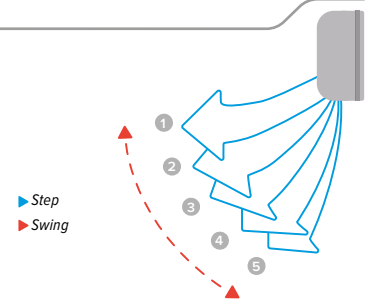

DISPLAY SHUT-OFF

Indoor unit displays can be shut off at night, creating a better environment for rest.

ECO MODE

Eco mode saves energy whilst retaining a comfortable indoor environment.

features



RM12D / RM12F

On/Off	●
7-speed fan control	●
Mode selection	●
Auto Mode	●
Temperature setting (0,5°C or 1°C steps)	●
Dual temperature set points	-
Eco mode	●
Keyboard lock	●
Auto swing	●
5-step swing louver	●
Air direction control	●
Background light	●
Daily timer	●
Clock display	●
Address setting	●
Remote signal receiver	-
Clean filter reminder	-
Follow me function	●
Silent mode	●
Display shut-off	●
Indoor temperature display	-
°F/°C display	-
Weekly schedule timer	-
Delay function	●
Auto restart	-
Error reporting	-
2 permission levels	-
Bidirectional communication	-
Group control	-
Main or secondary controller setting	-
Extension function	-
Daylight saving time	-
Dot matrix display	-
IDU error check function	-
IDU parameter querying	-
Operate parameter setting	-

technical data


RM12D

Dimensions (Width x Height x Depth)	mm	48x170x20
Power supply	-	1,5V(LR03/AAA)x2

WIRED CONTROLLERS


REMOTE SIGNAL RECEIVER

A signal receiver is incorporated into the controllers, allowing the system status to be adjusted using a remote control.



GROUP CONTROL*

One controller can be used to unify the settings across up to 16 indoor units.



* Function available for WDC-120G/WK controller

SILENT MODE


In cooling and heating modes, selecting silent mode reduces the fan speed, lowering the running noise and creating a quieter environment.

2 PERMISSION LEVELS

2 permission levels ensure users can easily access control functions and allow administrators convenient access to operating parameters.

MAIN OR SECONDARY CONTROLLER SETTING

Two controllers can be used together, with the indoor units' operating mode and settings being set according to the most recent instruction received. The controller display screens are synchronized so that both displays update when a setting is adjusted.

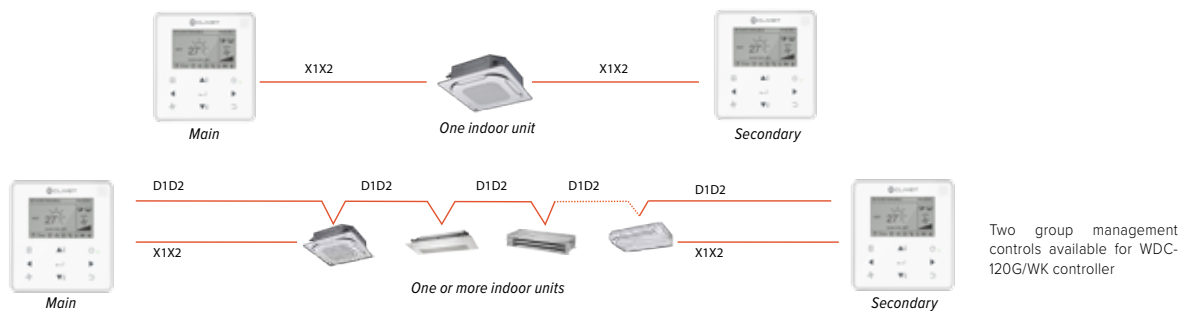

EXTENSION FUNCTION*


The extension function is specifically designed for users working overtime. Pressing the delay button postpones system shutdown by 1 or 2 hours.



* Function available for WDC-120G/WK controller


DUAL TEMPERATURE SET POINTS

With dual temperature set point control, in auto mode, it is possible to control in a customized way set temperatures for which units switch automatically between heating and cooling mode, adapting each indoor unit to specific users' needs.



WEEKLY SCHEDULE TIMER


The weekly schedule timer allows users to set multiple schedules each with its own operating mode, temperature settings and fan speeds.



*Function available for WDC-120G / WK command *

BI-DIRECTIONAL COMMUNICATION

The wired controller can query the system operating parameters thanks to the new bi-directional communication functionality. In addition, settings including static pressure, cold draft prevention and temperature compensation can be configured on the wired controller.

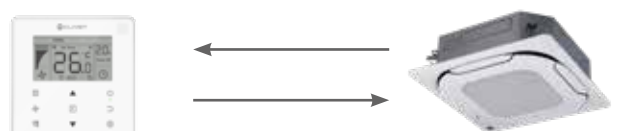

features



WDC-86E/KD

WDC-120G/WK

	WDC-86E/KD	WDC-120G/WK
On/Off	•	•
7-speed fan control	•	•
Mode selection	•	•
Auto Mode	•	•
Temperature setting (0,5°C or 1°C steps)	•	•
Dual temperature set points	•	•
Eco mode	•	•
Keyboard lock	-	-
Auto swing	•	•
5-step swing louver	•	•
Air direction control	•	•
Background light	•	•
Daily timer	•	•
Clock display	-	•
Address setting	•	•
Remote signal receiver	•	•
Clean filter reminder	•	•
Follow me function	•	•
Silent mode	•	•
Display shut-off	•	•
Indoor temperature display	•	•
°F/°C display	•	•
Weekly schedule timer	-	•
Auto restart	•	•
2 permission levels	•	•
Bidirectional communication	•	•
Group control	-	•
Main or secondary controller setting	•	•
Extension function	-	•
Daylight saving time	-	•
Dot matrix display	-	•
IDU error check function	•	•
IDU parameter querying	•	•
Operate parameter setting	•	•


technical data

WDC-86E/KD

WDC-120G/WK

	mm	WDC-86E/KD	WDC-120G/WK
Dimensions (Width x Height x Depth)		86x86x18	120x120x20
Power supply (by indoor unit)	-	18V DC	18V DC

ADVANCED CENTRALIZED CONTROLLERS



TOUCH SCREEN

The colorful touch screen and lively display make the interface more convenient and simple.



UNIT MODEL RECOGNITION

The controller recognizes the model of indoor and outdoor units and different models are represented by different icons.



GROUP MANAGEMENT

Units can be viewed according to group, system or location, making unit management clearer and more convenient.




SCHEDULE MANAGEMENT

Daily, weekly or annual schedules can be used to set unit settings such as on/off, operating mode, set temperature, fan speed and swing.



ENERGY MANAGEMENT

User can set limits or locks on an indoor unit, such as minimum cooling temperature, maximum heating temperature, fan speed lock, operation mode lock, swing lock, remote controller lock and wired controller lock.

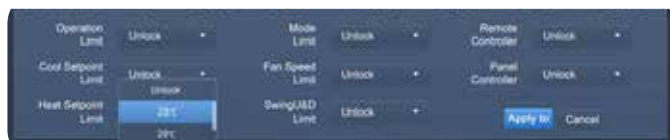

VISUAL SCHEMATIC

By importing floor plans and then dragging and dropping the indoor units to their actual positions on the floor plan, users can create a tailored system schematic which enables monitoring and control of the indoor units through a clear visual representation of the system layout.



* Function available for CCM-270A/WS controller

LAN ACCESS


A desktop or laptop PC can be used for browser-based access via a LAN connection.


* Function available for CCM-270A/WS controller



WIRING SCHEME

The controllers can be connected to the master outdoor unit directly.

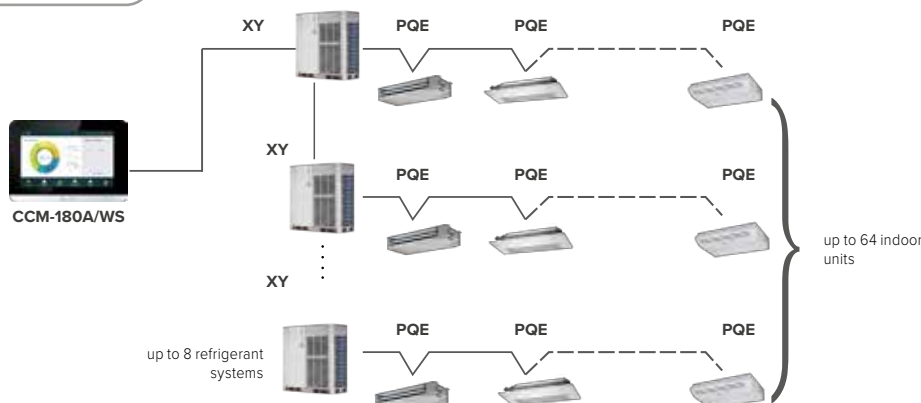

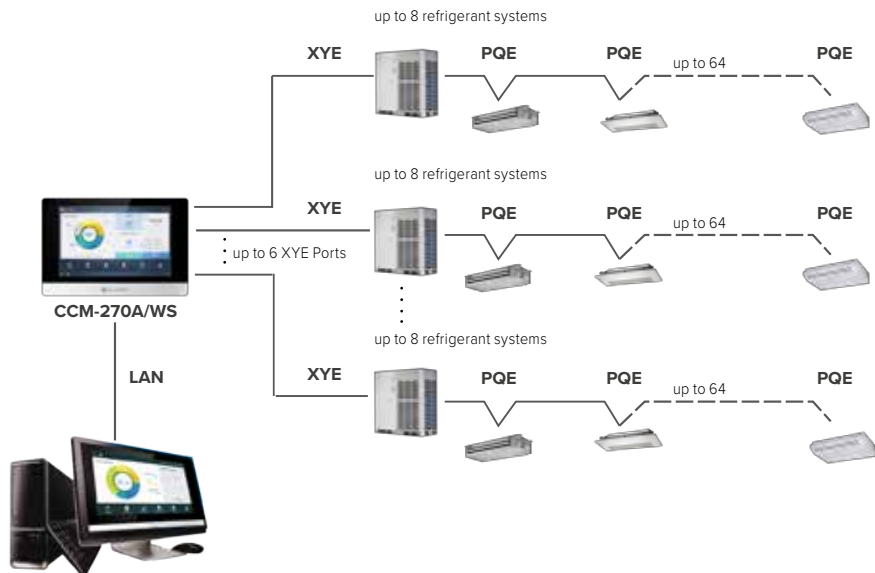

features



CCM-180A/WS



CCM-270A/WS



	CCM-180A/WS	CCM-270A/WS
Max. number of indoor units	64 *	384
Max. number of refrigerant systems	8	48
Touch screen	6,2"	10,1"
On/Off	●	●
7-speed fan control	●	●
Mode selection	●	●
Temperature setting (0,5°C steps)	●	●
Swing function	●	●
5-step swing louver	●	●
Clock display	●	●
Indoor temperature display	●	●
°F/°C display	●	●
2 permission levels	●	●
Extension function	●	●
Holiday setting	●	●
Schedule management	●	●
Indoor unit type/ model recognition	●	●
Visual schematic	-	●
Energy management	●	●
Group management	●	●
Error check function	●	●
Parameter querying	●	●
USB output	●	●
Report display	Error report	Error report and operation record
Operating log	-	●
LAN access	-	●

*Not compatible with mixed VRF/SPLIT systems. VRF mixed systems are possible between MV6, MV6i and MV6R OR between Mini VRF and MW.

Not compatible with HWM-2-XMi high temperature hydro module management.

technical data


		CCM-180A/WS	CCM-270A/WS
Dimensions (Width x Height x Depth)	mm	182x123x34	270x183x32
Power supply	-	100-240V (50/60Hz) (adapter supplied)	24V AC (adapter not included)

SIMPLIFIED CENTRALIZED CONTROLLERS



CENTRALIZED CONTROL

Centralized controllers are multifunctional devices that can control up to 64 indoor units within a maximum connection length of 1200 m. Users enjoy the flexibility of either controlling multiple units as a group or assigning individual temperature settings to each unit.

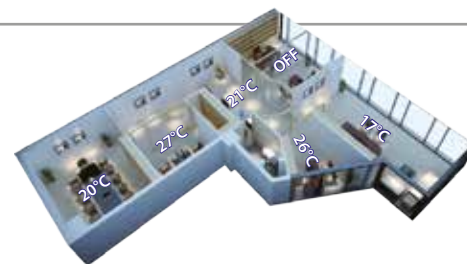

MULTIPLE LOCK MODES

In addition to locking the centralized controller's own keyboard, the centralized controller may also be used to lock each unit's operating mode or remote controller.

- Locking Running Mode
- Locking Remote Controller
- Locking Keyboard

WIRING FLEXIBILITY

To simply and centralize wiring configurations, centralized controllers can be connected directly to the master outdoor unit. In addition to the CCM30, the CCM15 can be connected in series with external units of the Mini VRF, MHR and MW series.



MULTI-SYSTEM CONTROL

Ensure the address is not repeated. Units can be from different systems, with up to 64 indoor units. This greatly reduces system limitations.



With 2-pipe systems, all the indoor units must operate in the same mode. With 3-pipe systems, the indoor unit operation mode may be set as required.


CLEAN FILTER REMINDER



The CCM30 centralized controller records the total running time of each indoor unit. When the accumulated running time reaches the value pre-set by the user, the system reminds the user to clean the indoor unit's filter, ensuring that the airflow does not become obstructed.

SINGLE/UNIFIED CONTROL MODE

Controllers can be toggled between unified and single control modes, to enable either unified control of all units or control of a specific unit. Operating mode feedback is used to ensure that all units are operating in the mode specified by the user.

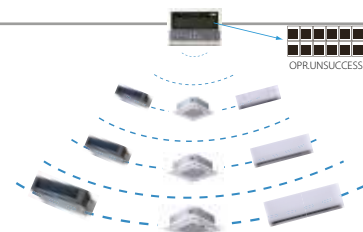

INDOOR UNITS OPERATING STATUS DISPLAY

Error and protection codes are shown directly on centralized controllers' displays, avoiding the need to access outdoor units' PCBs to obtain codes during a system event. A wide range of error and protection codes provide system status information to building management professionals before contacting a service engineer.

Error code or protection code										Connection status matrix									
Current	88#	ALL	Protect	Sat. temp	88°C	Mode	Auto	Query Set Opr. unsuccess											
Online	ON	OFF	Error	88°C	Mode	Auto													
T2A	T2B	T3	Period	Room temp	88:00	88:00													
Week	Sun	Mon	Tue	Wed	Thu	Fri	Sat												
Year	18	28	28:00																
										Weekly Timer Off									

STYLISH DESIGN

The stylish design of centralized controllers complements the interior ambience of high-specification homes and workplaces.



features



CCM30-B

Max. number of indoor units	64
Max. number of refrigerant systems	8
Touch screen	-
On/Off	●
7/3-speed fan control	3
Mode selection	●
Temperature setting (0,5°C steps)	-1°C
Swing function	●
5-step swing louver	-
Clock display	-
Indoor temperature display	●
*F/°C display	●
2 permission levels	●
Extension function	-
Holiday setting	-
Schedule management	-
Indoor unit type/ model recognition	-
Visual schematic	-
Energy management	Mode / Remote controller limit
Group management	●
Error check function	●
Parameter querying	●
USB output	-
Report display	-
Operating log	-
LAN access	-

technical data

		CCM30-B
Dimensions (Width x Height x Depth)	mm	180x122x78
Power supply	-	198-242V (50/60Hz)


DATA CLOUD CONVERTER



The cloud server controller enables remote control on the VRF system through the Internet. Smart phones, tablets, laptops, and desktop PCs can serve as a web controller for up to 64 indoor units.

SIMPLE CONTROL INTERFACE

- Software control/ Cloud server control (WEB access).
- Click & Operate: the user-friendly interface.
- Allows single and group control.
- Simplified user control interface.
- Color indication and icons makes it easy to recognize unit status.
- Includes a full-screen display, and allows temperature adjustment by swiping.

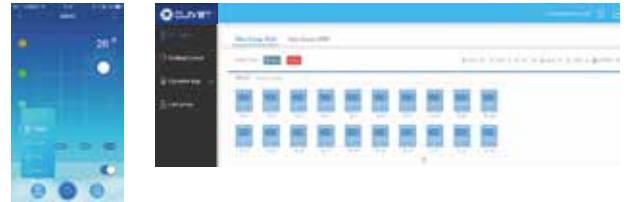

WEB SITE CLOUD SERVER




In addition to the app, you can check and monitor the status of the system at any time and anywhere from the cloud server website

GROUP CONTROL

Different groups can be created to manage multiple indoor units simultaneously with a single touch

WEEKLY SCHEDULE CONTROL

Users can set a weekly schedule either for specific units or for groups of units. Each day may be divided into multiple sections. The controller automatically controls each units' on/off status, operating mode, fan speed and temperature settings according to the schedule.

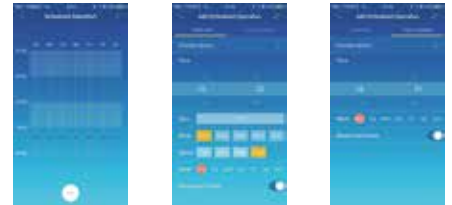


CLEAR ICONS

The operating mode can be seen at first glance through colored icons.



2 USER LEVELS


The administrator can set up different sub-users with different permissions to better manage the system.



ADDED CONVENIENCE

The air conditioner can be remote controlled by a phone or tablet. Query and control the running state of the A/C anytime, anywhere, and schedule queries and actions in advance. Remotely turn off the air conditioner to avoid wasting power.

WIRING SCHEME

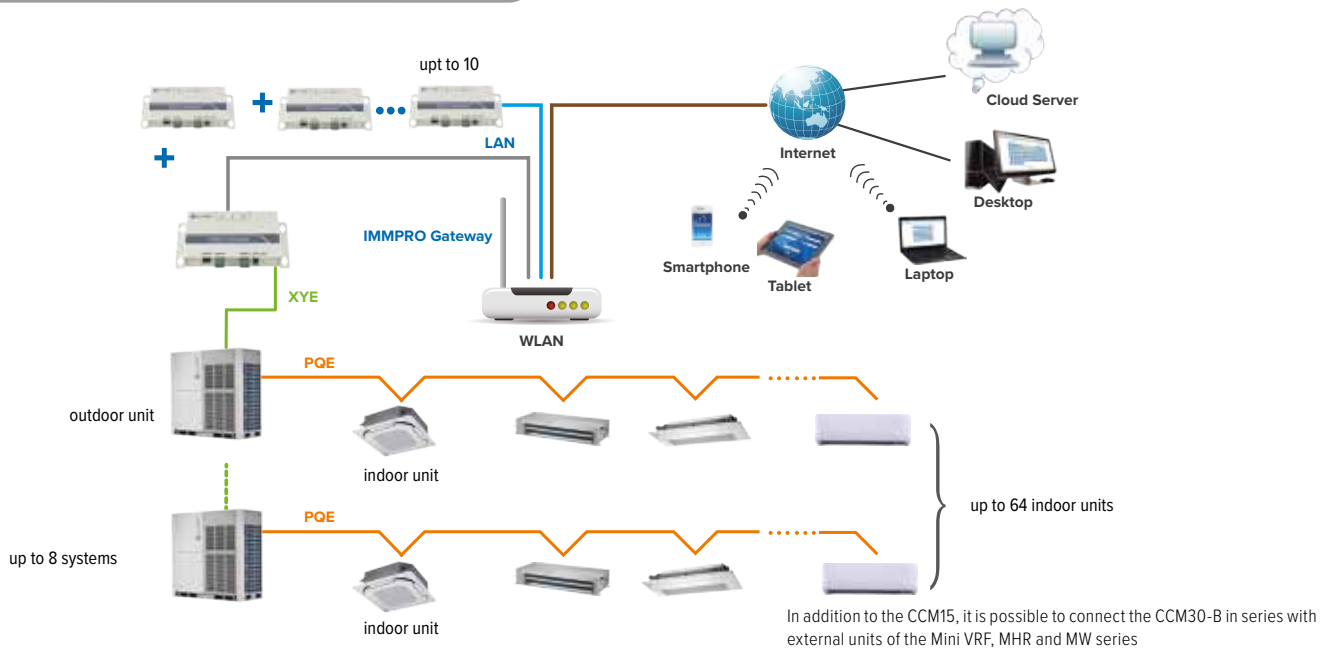

features



CCM15

Application scenario	Smartphone via APP	PC via Cloud Web
Max. number of indoor units	64	64
Max. number of refrigerant systems	8	8
Application name	M-control	M-control
Max number per Application system	10	10
On/Off	●	●
Mode selection	●	●
Temperature setting	●	●
Swing function	●	●
Ambient temperature display	●	●
°F/°C display	●	●
2 permission levels	●	●
Schedule management	●	●
Energy management	●	●
Group management	●	●
Error check function	●	●
Parameter querying	●	●
Configuration	●	-
Account registration	●	-
Demo	●	-
Report display	3 (parameters, account logs, alarms)	3 (parameters, account logs, alarms)
LAN access	●	●

technical data

	mm	CCM15
Dimensions (Width x Height x Depth)		187X115X28
Power supply	-	AC 220V - 50/60Hz (adapter included)

IMMPRO NETWORK CONTROL SYSTEM



IMMPRO network control system is specially designed to control VRF systems. With a centralized system architecture, it monitors and controls all the parameters and functions of the VRF system. IMMPRO's built-in flexibility suit it to building solutions that vary widely in scale, purpose and control schema.


USER-FRIENDLY INTERFACE

Simple, practical user interface makes for a user-friendly experience even for first-time users.



OUTDOOR UNIT CONFIGURATION

Outdoor unit configuration and settings can be monitored and controlled without having to go outdoors.

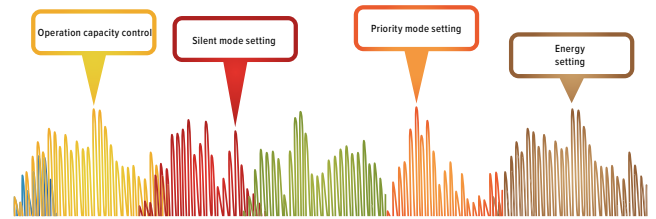

ELECTRICITY CHARGE DISTRIBUTION

The IMMPRO uses a patented Calculation Method to estimate the electricity consumption of the outdoor units and then divide it among the indoor units so that the electricity charges can be equitably divided among building occupants.




VISUAL SCHEMATIC

By importing floor plans and then dragging and dropping the indoor units to their actual positions on the floor plan, users can create a tailored system schematic which enables monitoring and control of the indoor units through a clear visual representation of the system layout.



PUBLIC AND IDLE DEVICES

Marking a unit as a public device or idle device ensures the electricity charge distribution is more accurate and reasonable.



SCHEDULE MANAGEMENT


Daily, weekly or annual schedules can be used to set unit settings such as on/off, operating mode, set temperature, fan speed and swing.




XPRESS INSTALLATION

With the Xpress Installation wizard, IMMPRO can be installed quickly and easily without requiring support from a technical support engineer.


LAN access

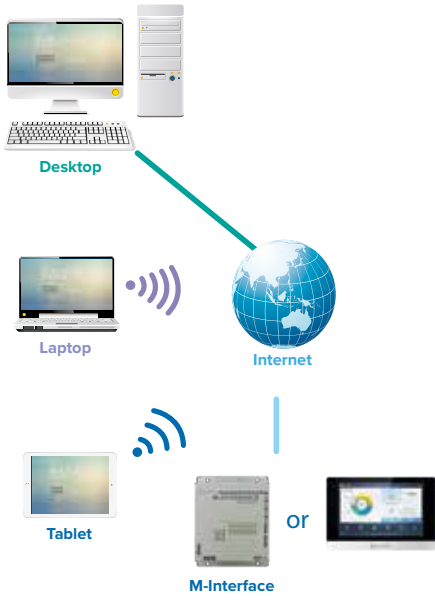


Access from remote VPN

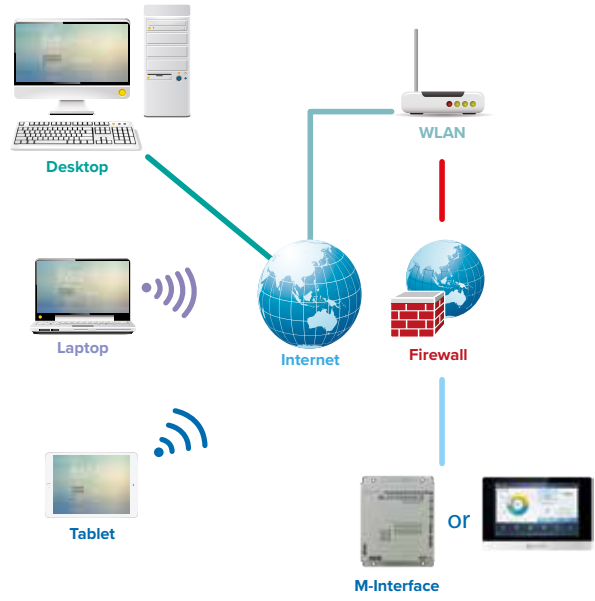

Wiring diagram with IMMP-M or IMMP-BAC or IMMP-BAC(A) as IMMPRO gateway

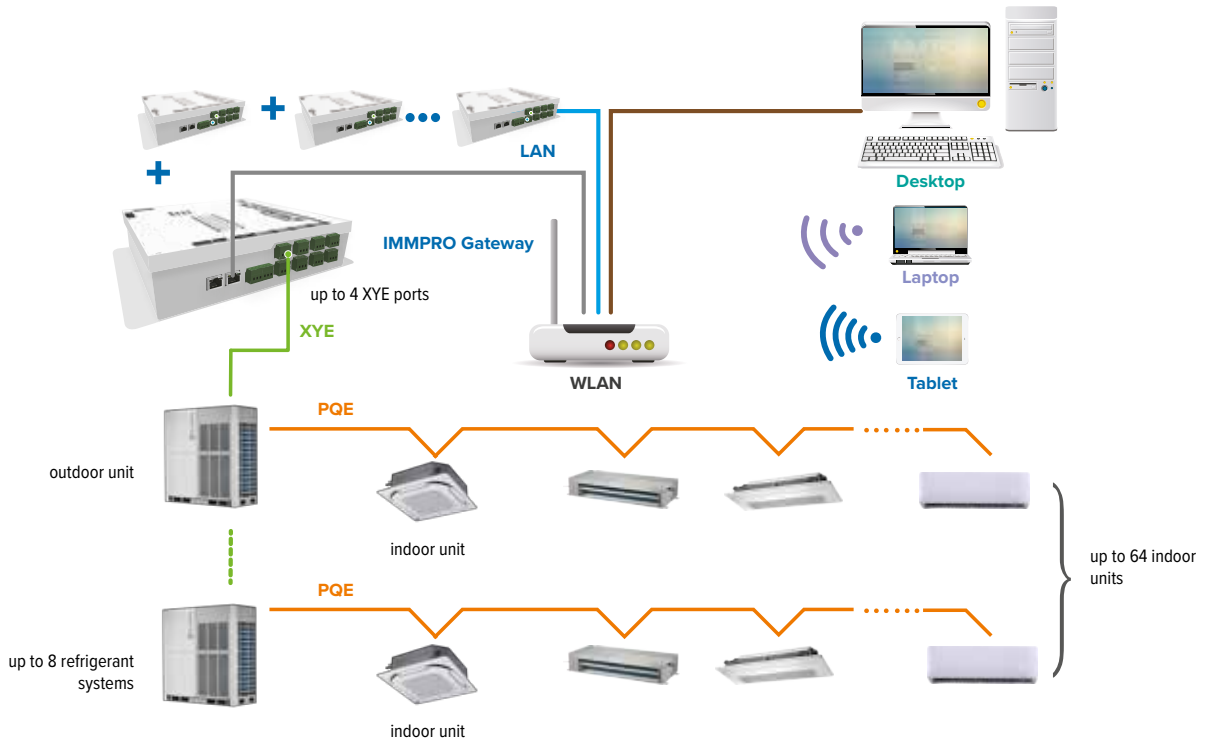

Wiring diagram with CCM-270A/WS as IMMPRO gateway

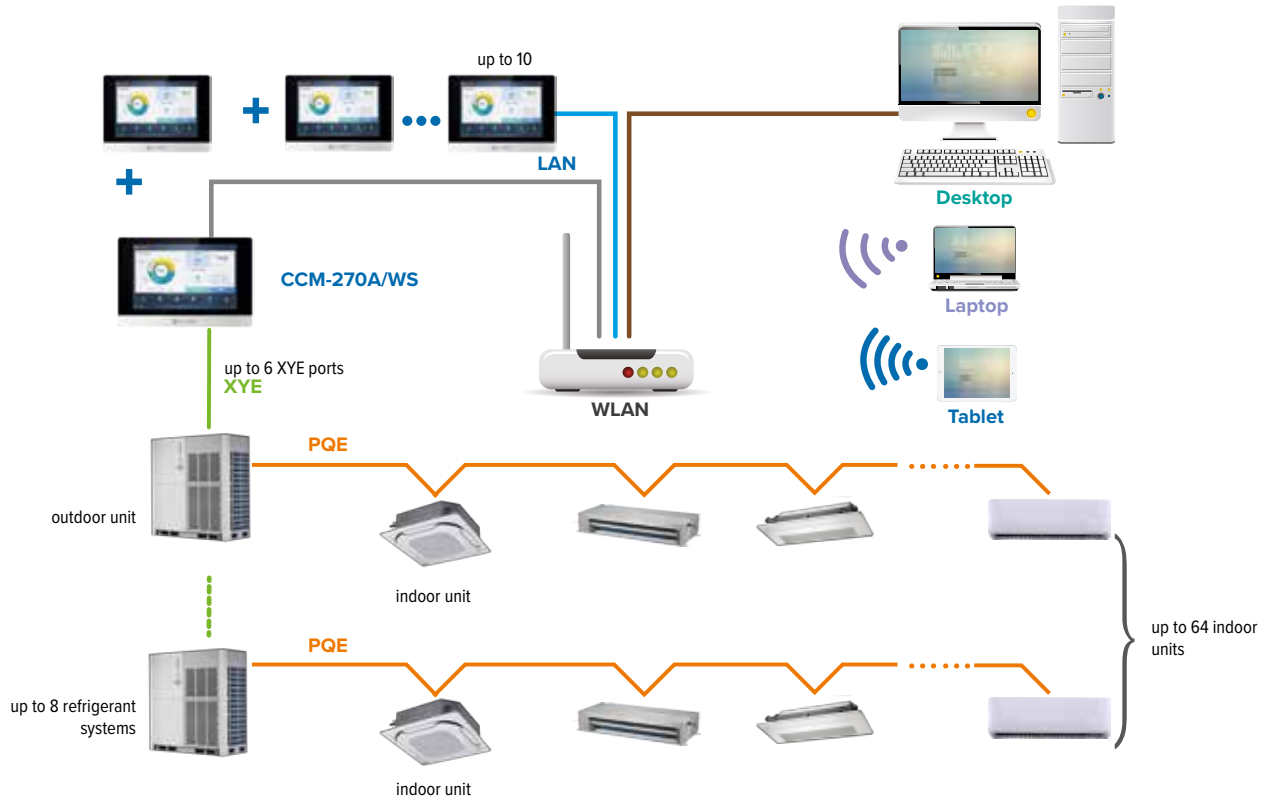

features



Hardware

	IMMP-M / IMMP-BAC / IMMP-BAC(A)	IMMP-S	CCM-270A/WS
Software		IMMP-S	IMMP-S
Max. IMMPRO interfaces number per IMMPRO software		10	10
Max. number of indoor units per IMMPRO software		2560	3840
Max. number of refrigerant systems per IMMPRO software		320	480
Temperature setting (0,5°C steps)	●	●	●
7-speed fan control	●	●	●
Auto swing	●	●	●
5-step swing louver	●	●	●
Outdoor unit Eco mode setting	●	●	●
Holiday setting	●	●	●
Annual schedule management	●	●	●
Clock display	●	●	●
2 permission levels	●	●	●
Unit model recognition	●	●	●
Electricity charge distribution	●	●	●
Visual schematic	●	●	●
Energy management	●	●	●
Group management	●	●	●
Error check function	●	●	●
System parameter querying	●	●	●
Emergency stop and Alarm signal output	-	-	-
Report output	●	●	●
Operating log	●	●	●
LAN access	●	●	●
Data backup	●	●	●
Remote VPN access	●	●	●


IMM NETWORK CONTROL SYSTEM



IMM network control system is specially designed to control VRF systems. With a centralized system architecture, it monitors and controls all the parameters and functions of the VRF system. IMM's built-in flexibility suit it to building solutions that vary widely in scale, purpose and control schema.

NETWORK CONTROL

- Compatible with Windows XP 32 bit, Windows 7 32/64 bit and Windows 8
- Browser-based access on a PC, tablet computer or smart phone
- Remote access via VPN link to network allows anytime, anywhere monitoring and control
- Full support for access via IE, Firefox, Safari and Chrome

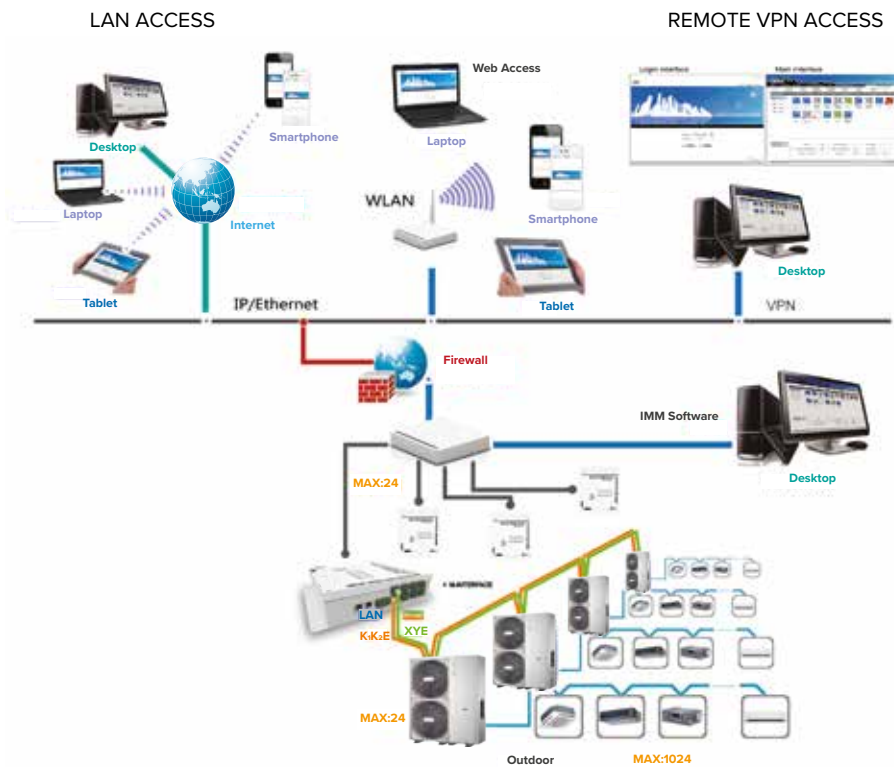

SIMPLE OPERATION AND MANAGEMENT

- Flexible and highly efficient centralized management system
- User-friendly 'click and operate' interface allows non-experts to easily run the building management system



VISUAL SCHEMATIC

By importing floor plans into IMM and using the drag and drop interface to position the indoor units on the floor plan, users can create a tailored system schematic which enables monitoring and control of each unit's status and parameters through a clear visual representation of the system layout.



WEB ACCESS FUNCTION

A PC, tablet computer or smart phone can be used for browser-based access to IMM via a LAN connection or VPN/WAN connection. Using a VPN link on a WAN enables remote anytime, anywhere access, allowing facilities management professionals to monitor and control VRF systems whilst on business trips or working from home. Up to four registered users may connect concurrently.



WAN access needs to set up the VPN.

SCHEDULE MANAGEMENT


A daily or weekly schedule can be set to control the on/off status, operating mode, temperature setting and remote control lock status of each indoor unit.

- Daily/weekly task scheduling
- Individual schedules can be applied to each indoor unit
- Advanced energy conservation options



ELECTRICITY CHARGE DISTRIBUTION (PATENTED)

IMM uses the patented Calculation Method to estimate the energy consumption of each indoor unit (or group of units) in order that air conditioning electricity charges can be equitably divided among building occupants. The Calculation Method takes account of temperature setting, room temperature, return air temperature, operating mode, running time, refrigerant flow, indoor unit power rating and nighttime use to estimate the energy consumption of each indoor unit before apportioning the estimated energy consumption of units in public areas among building occupiers. Unit-by-unit electrical energy consumption data also greatly facilitates the optimization of energy consumption management.

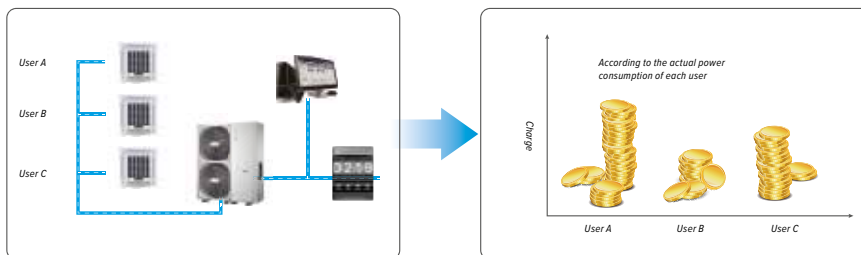

ENERGY MANAGEMENT

Based on a predetermined schedule, the Intelligent Manager executes capacity control and intermittent operations on all air conditioning units to maintain a high comfort index.

User can set a limit on any running unit, any parameter, such as cooling temp., heating temp., fan speed, operation mode, and so on*.

- Meet with the Public building energy efficiency management regulations.
- Matches the corresponding indoor units.



AUTOMATIC OR MANUAL NETWORK CONFIGURATION

IMM offers a choice of automatic or manual network configuration.



Automatic configuration

Each IMM controller can support up to 4 refrigerant systems, 16 outdoor units and 256 indoor units.



Manual configuration

Each IMM controller can support up to 16 refrigerant systems, 64 outdoor units and 256 indoor units.

DATA BACKUP

Double data backup stored on the IMM controller and IMM database.

The IMM controller automatically backs up power data for 1 or 2 months if a system failure occurs.

Examples: if there is a PC power failure or a system crash, the IMM controller will automatically backup the data to the gateway.

IMM software also stores running data on the software database.

ZONE MANAGEMENT

Zones can be set up to enable the easy management of areas with differing heating/cooling requirements such as offices, restaurants, gyms and lobbies.

MULTIPLE LANGUAGE OPTIONS

Nine languages are supported and can be selected by the user:

- English
- French
- Italian
- Russian
- German
- Spanish
- Simplified Chinese
- Polish
- Korean

features



Hardware	IMM controller
Software	IMM Software
Max. IMM interfaces number per IMM software	4
Max. number of indoor units per IMM software	1024
Max. number of refrigerant systems per IMM software	64
Temperature setting (0,5°C steps)	- (1°C)
7-speed fan control	-3
Auto swing	●
5-step swing louver	-
Outdoor unit Eco mode setting	-
Holiday setting	-
Annual schedule management	●
Clock display	●
2 permission levels	●
Unit model recognition	-
Electricity charge distribution	●
Visual schematic	●
Energy management	●
Group management	●
Error check function	●
System parameter querying	●
Emergency stop and Alarm signal output	●
Report output	●
Operating log	●
LAN access	●
Data backup	●
Remote VPN access	●




FULL INTEGRATION

Bacnet Gateway allow VRF systems to be monitored and controlled alongside other building management technology that use the BACnet protocol such as access control, fire detection and lighting systems.


WIRING SCHEME IMMP-BAC / IMMP-BAC(A)

The gateway can be connected directly to the XYE ports of the master external units.

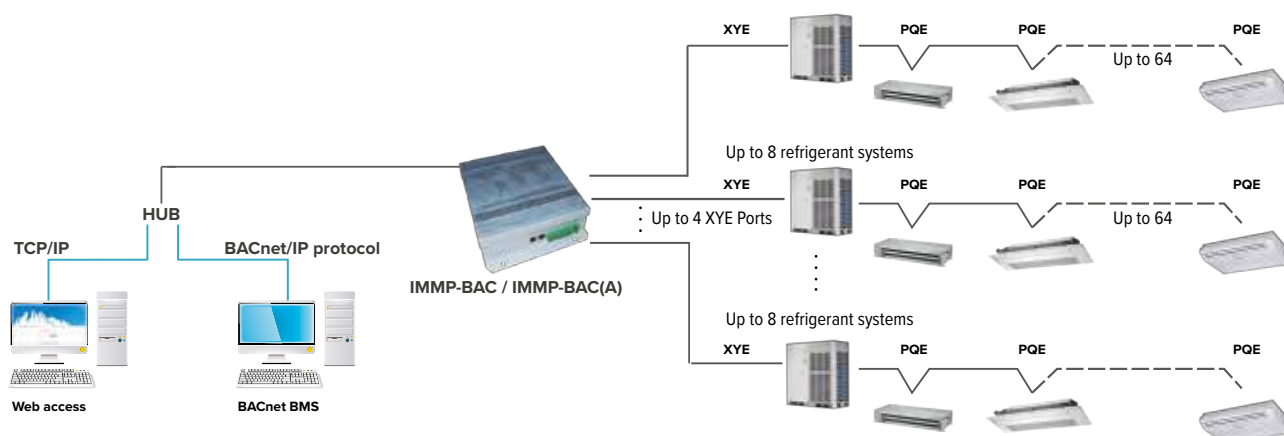

WIRING SCHEME CCM08

The gateway can be connected to an outdoor unit's XYE or K1K2E. It is also compatible with connection to an CCM30 centralized controller, through F1F2E port.

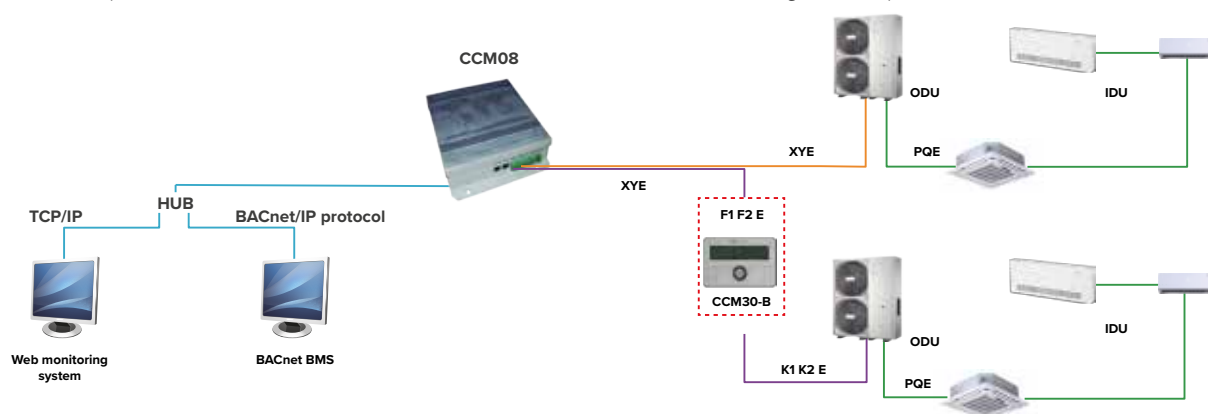

CONTROL SYSTEMS

features



NEW

	GW-BAC/IMMP-BAC*	CCM08*	IMMP-BAC(A)
Max number of indoor units connectable	256	256	256
Max. number of refrigerant systems connectable	32	32	32
Control ⁽¹⁾	On / Off	●	●
	Mode selection	●	●
	Temperature setting	●	●
	Fan speed	●	●
	Energy management	●	●
	Auto mode	-	-
	High Temperature Hydromodule	-	-
Indoor unit monitoring ⁽¹⁾	Room temperature display	●	●
	Error status	●	●
	Error alarms	●	●
	Operating mode	●	●
Outdoor unit monitoring ⁽¹⁾	Outdoor ambiente temperature	●	●
	Fan speed	●	●
	Compressor operating frequency	●	●
	Compressor discharge temperature	●	●
	System pressure	●	●
LAN access	Error status	●	●
	Error alarms	●	●
BTL certification	●	●	●
Compatibility	Siemens	APOGEE	APOGEE
	Trane	TRACER	TRACER
	Honeywell	ALERTON	ALERTON
	Schneider	Andover Continuum	Andover Continuum
	Johnson Controls	METASYS	METASYS

compatibility



	VRF MV6/MV6i /MV6R only	Mini VRF VRF MW only
 GW-BAC / IMMP-BAC	✓	-
 CCM08	-	✓
 IMMP-BAC(A)	✓	✓

technical data

	GW-BAC / IMMP-BAC	CCM08	IMMP-BAC(A)
Dimensions (Width x Height x Depth)	mm 319x251x61	251x319x61	190x116x67
Power supply	- AC 100-240V - 50/60Hz	AC 220V - 50/60Hz	24V AC - 50/60Hz (adapter not included)

(1) Refer to technical documentation for a complete list of controllable/monitorable parameters

*Available while stocks last

LONWORKS® GATEWAY




FULL INTEGRATION

Gateway LonWorks allow Clivet VRF systems to be monitored and controlled alongside other building management technology on the LonWorks platform such as security, fire safety and lighting systems.


WIRING SCHEME GW-LON / GW LON(A)

The gateway can be connected directly to the XYE ports of the master external units.

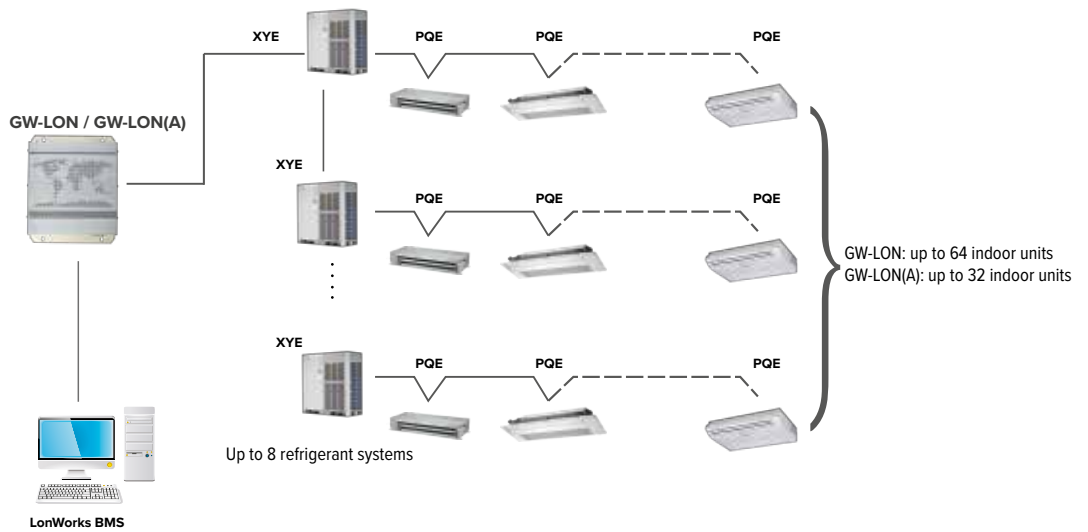

WIRING SCHEME LonGW64

Connection to external units via XYE ports.

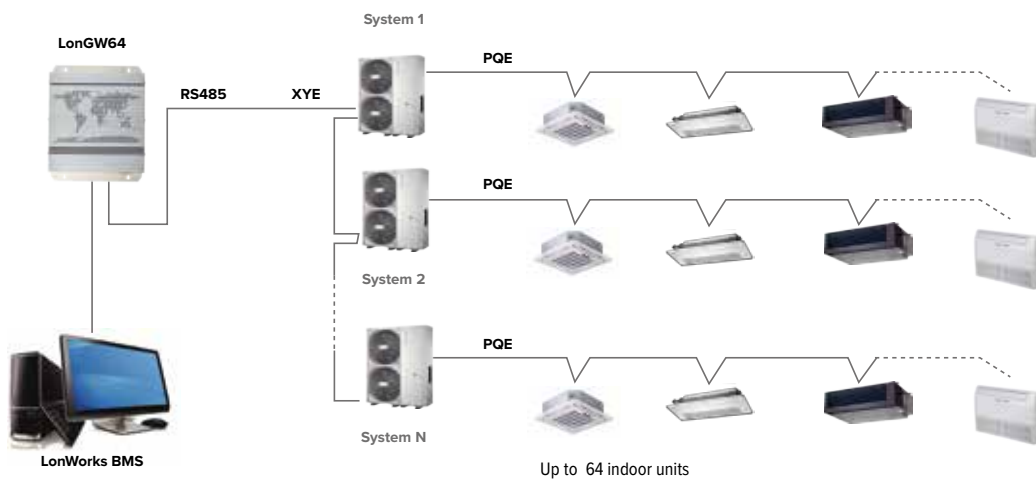

CONTROL SYSTEMS

features



GW-LON*



LonGW64*



GW-LON(A)

NEW

		GW-LON*	LonGW64*	GW-LON(A)
Max number of indoor units connectable		64	64	32
Max. number of refrigerant systems connectable		8	8	8
Control ⁽¹⁾	Mode selection	●	●	●
	Temperature setting	●	●	●
	Fan speed	●	●	●
	Group shut down	●	●	●
	On / Off	●	●	●
	Auto mode	-	-	●
	High temperature Hydromodule	-	-	●
Indoor unit monitoring ⁽¹⁾	Mode selection	●	●	●
	Temperature setting	●	●	●
	Fan speed	●	●	●
	Online status	●	●	●
	Operating status	●	●	●
	Room temperature	●	●	●
Outdoor unit monitoring	Error status	●	●	●

compatibility



	VRF MV6/MV6i /MV6R only	Mini VRF VRF MW only
 GW-LON	✓	-
 LonGW64	-	✓
 GW-LON(A)	✓	✓

technical data

		GW-LON	LonGW64	GW-LON(A)
Dimensions (Width x Height x Depth)	mm	319×251×61	251×319×61	170×116×67
Power supply	-	AC 100-240V - 50/60Hz	AC 220V - 50/60Hz	24V AC - 50/60Hz (adapter not included)

(1) Refer to technical documentation for a complete list of controllable/monitorable parameters

*Available while stocks last

MODBUS® GATEWAY




FULL INTEGRATION

The GW-MOD Gateway enable seamless connection of Clivet VRF systems with building management systems built on the Modbus communication protocol.

WIRING SCHEME GW-MOD / GW-MOD(A)


The gateway can be connected directly to the XYE ports of the master external units.

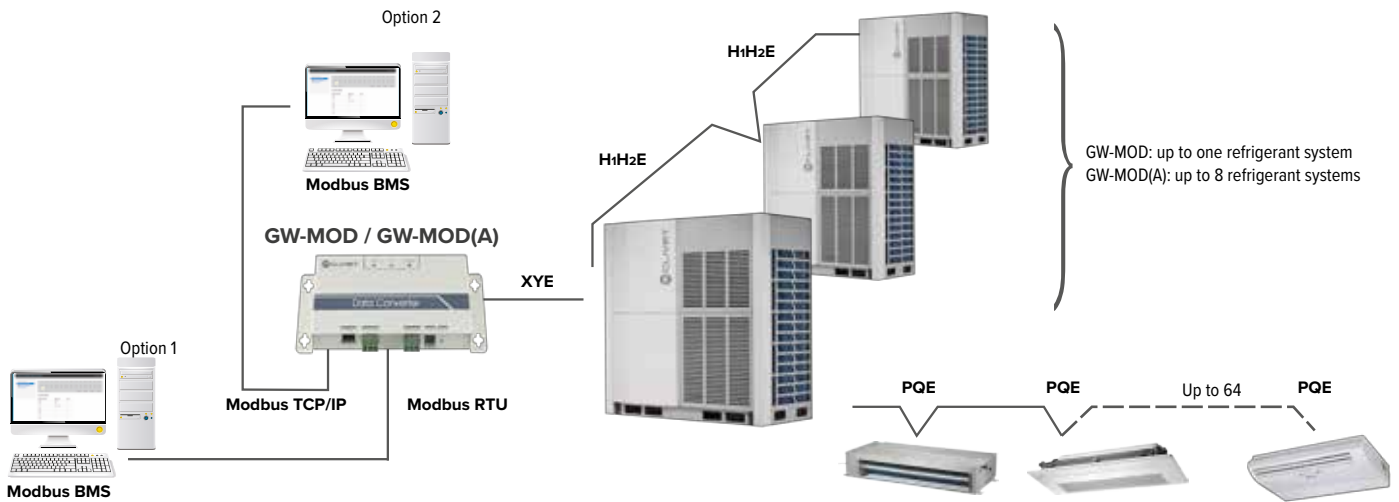

WIRING SCHEME I CCM18A / CCM18ANU

The gateway can be connected directly to the XYE ports of the master external units.

CONTROL SYSTEMS

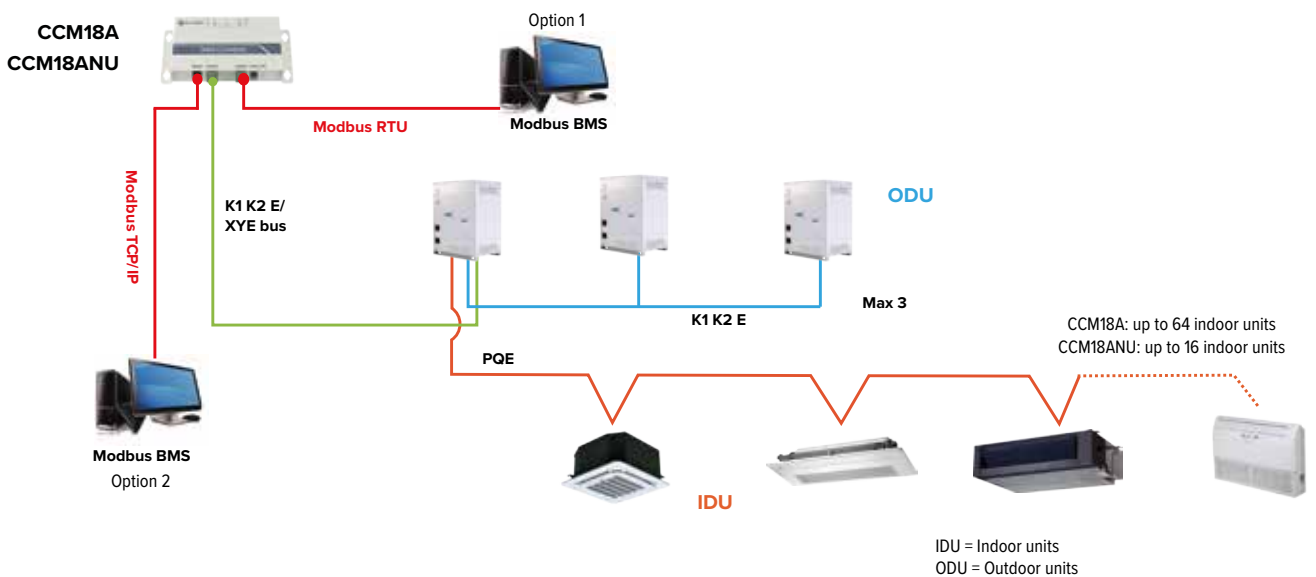

features




NEW

	GW-MOD*	CCM18A	CCM18ANU	GW-MOD(A)
Max number of indoor units connectable	64	64	16	64
Max. number of refrigerant systems connectable	1	1	1	8
Connects to BMS through either TCP/IP or RTU	●	●	●	●
Control ⁽¹⁾				
On / Off	●	●	●	●
Mode selection	●	●	●	●
Temperature setting	●	●	●	●
Fan speed	●	●	●	●
Group on/off	●	●	●	●
Auto mode	-	-	-	●
High temperature Hydromodule	-	-	-	●
Indoor unit monitoring ⁽¹⁾				
Online status	●	●	●	●
Room temperature	●	●	●	●
Error status	●	●	●	●
Operating mode	●	●	●	●
Operating mode	●	●	-	●
Block status	●	●	-	●
Outdoor unit monitoring ⁽¹⁾				
Fan speed	●	●	-	●
Temperature setpoint	●	●	-	●
Outdoor temperature	●	●	-	●
Error status	●	●	-	●

compatibility



	VRF MV6/MV6i / MV6R only	Mini VRF VRF MW only
 GW-MOD	✓	-
 CCM18	-	✓
 CCM18ANU	-	✓
 GW-MOD(A)	✓	-

technical data

		GW-MOD	CCM18A	CCM18ANU	GW-MOD(A)
Dimensions (Width x Height x Depth)	mm	187×115×28	187×115×28	187×115×28	128×225×28
Power supply	-	AC 100-240V - 50/60Hz	AC 220V - 50/60Hz	AC 220V - 50/60Hz	AC 100-240V - 50/60Hz

(1) Refer to technical documentation for a complete list of controllable/monitorable parameters

*Available while stocks last


KNX GATEWAY

FULL INTEGRATION

KNX Gateway enable full integration of Clivet VRF systems with home and building management systems built on the NKX network communications protocol.


BROAD INTEGRATION

Being compatible with the KNX protocol means that Clivet's VRF air conditioners can be integrated into control systems alongside the wide range of KNX compatible products that are available.

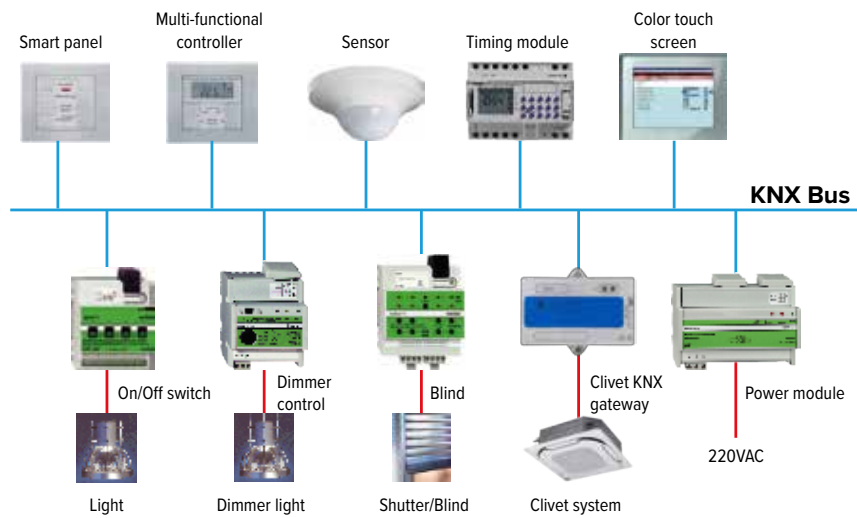

WIRING SCHEME

Each Gateway can be connected to each indoor unit on D1D2E port.

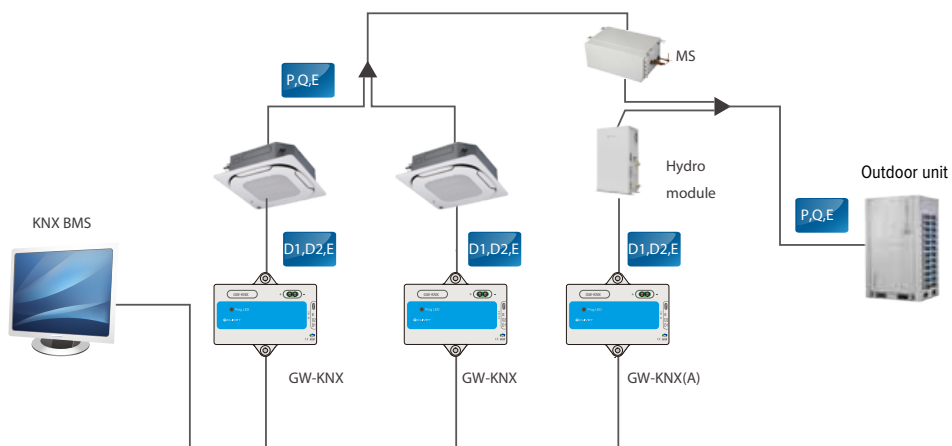

CONTROL SYSTEMS

caratteristiche



GW-KNX

Max number of indoor units connectable		1
Control ⁽¹⁾	On / Off	●
	Mode selection	●
	Temperature setting	● (intervals of 1 °C)
	Fan speed	● (3 speed)
Indoor unit monitoring ⁽¹⁾	Swing	●
	On / Off	●
	Mode selection	●
	Temperature setting	●
Outdoor unit monitoring ⁽¹⁾	Fan speed	●
	Swing	●
	Ambient temperature	●
	Fan speed	●
	Set temperature	●
	Outdoor ambient temperature	●
	Error status	●



GW-KNX(A)

NEW

Max number of indoor units connectable		1
Control ⁽¹⁾	On / Off	●
	Ambient temperature	●
	Supply water temperature	●
	Mode selection	●
	DWH mode water temperature	●
Monitoring ⁽¹⁾	On / Off	●
	Current operating mode	●
	Supply water temperature	●
	Ambient temperature	●
	Control status	●
	DWH mode current temperature	●
	Error codes	●

compatibility



All indoor units except for High Temperature Hydromodule

High Temperature Hydromodule



GW-KNX

✓

-



GW-KNX(A)

-

✓

technical data

		GW-KNX / GW-KNX(A)
Dimensions (Width x Height x Depth)	mm	85x51x16
Power supply	-	29VDC (KNX bus power supply)

(1) Please refer to the technical documentation for a complete list of controllable/monitorable variables.


XYE EXTENSION KIT

PRACTICAL CONNECTION IN ONE POINT

The XYE duplication kit allows to connect 2 centralized controls or gateways to the same system in a single point on the external units.

In this way it is possible to manage the VRF systems by combining different control interfaces, to the advantage of plant flexibility.

INSTALLATION SCHEME

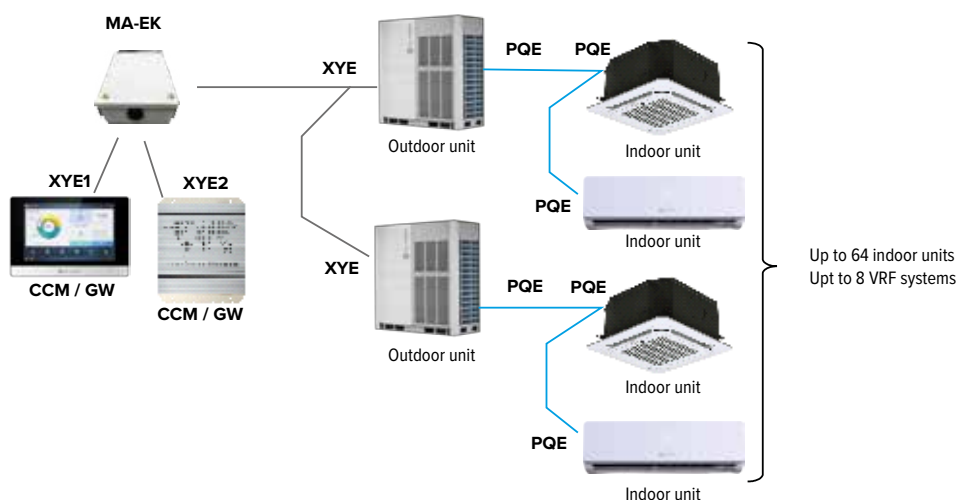

technical data



MA-EK

Dimensions (Width x Height x Depth)	mm	225x128x28
Power supply	-	12V DC (adapter not included)

INFRARED SENSOR CONTROLLER

Using infrared sensors to detect movement, the NIM09 Infrared Sensor Controller automatically turns indoor units on or off upon sensing that the room is occupied or unoccupied. Suitable for hotels, offices, conference rooms and residences, the Infrared Sensor Controller ensures climate control whilst minimizing energy consumption.

- Automatically extends shut down time to avoid frequent on/off actions
- Simple design discretely blends in with hotel, office or apartment complex decors


FLEXIBILITY

The sensor may be fixed either to a wall or a ceiling, providing flexibility to tailor the arrangement of sensors to the particular geometry of any space. Users may additionally use remote or wired controllers to adjust the air conditioning settings.*




* Wired controls compatible with NIM09 only if connected via display board

INSTALLATION SCHEME

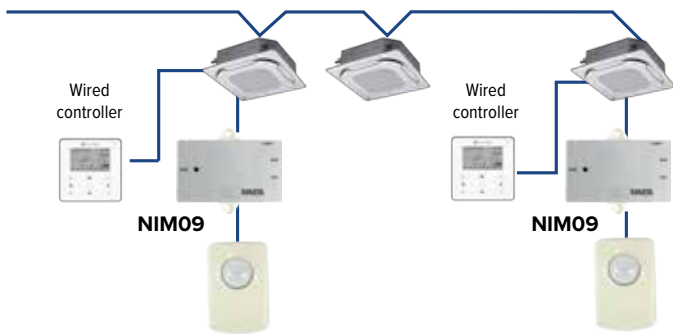

ELECTRICAL WIRING

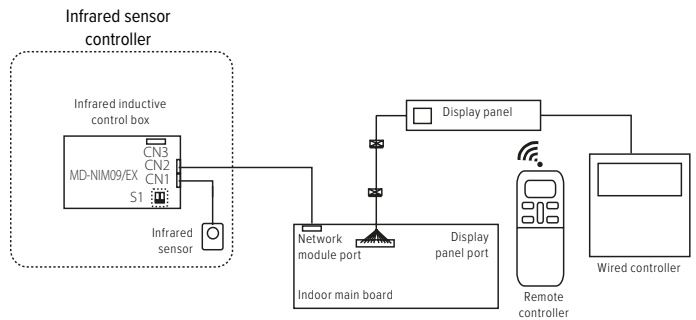

technical data



		NIM09	
Sensor - Dimensions (Width x Height x Depth)	mm	30x46x25.6	
Control box- Dimensions (Width x Height x Depth)	mm	72.8x86x15.5	
Power supply (from IDU)	-	DC 5V	

REMOTE SENSOR PACKAGE


ROOM TEMPERATURE READING IN THE RIGHT PLACE

Remote room temperature sensor RT01 allows to regulate indoor unit operation depending on air temperature read by its probe instead of temperature sensor placed on return air.

Ideal for applications in which it is required to control systems exclusively via centralized controllers or BMS and user prefers not to install remote controllers locally, this sensor allows to read air temperature in the most representative point in the room and to regulate the indoor unit consequently

SENSOR SUPPLIED WITH EXTENSION CABLE TO MEET EVERY NEED

Accessory is composed of a 5 m temperature sensor and of a 14 m adapter working as an extension cable, for a total length of 14 m. In this way every possible installation in terms of distance between indoor unit and detection point can be realized.

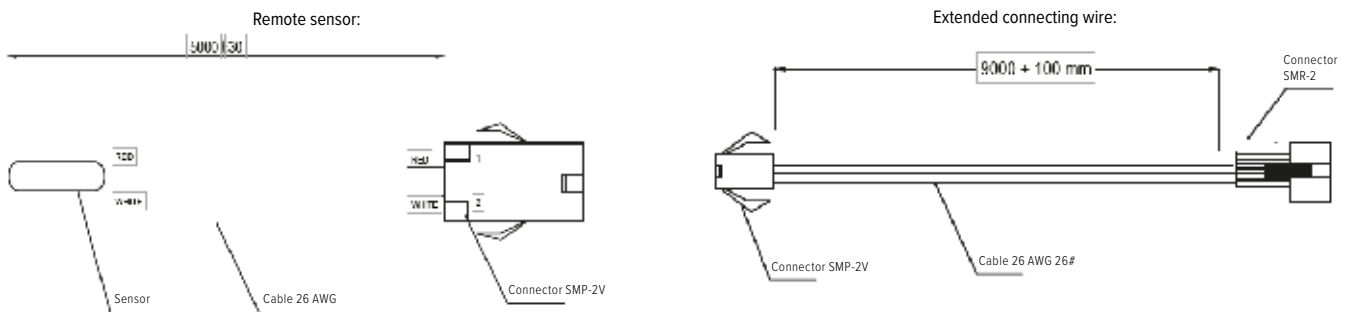

INSTALLATION SCHEMATIC

Temperature sensor installation is extremely simple: it is sufficient to disconnect return air thermistor pre-cabled by factory from unit PCB and replace it with adapter cable connector, once connected it to temperature sensor.



technical data



RT01

Lenght	mm	1400 (= 5000 + 9000)
Power supply	-	DC 5V

DIGITAL POWER METER

The DTS634 (380V, 50 Hz, 60A) and DTS634-F (380V, 50 Hz, 100A) digital energy meters can be fitted to outdoor units (on a one meter per unit basis) to measure power consumption.

LOW POWER CONSUMPTION


The digital power meter consumes minimal energy.

Voltage circuit: less than 2W/10VA

Current circuit: less than 2.5VA

INSTALLATION SCHEMATIC

The digital power meter is tested after manufacture so it can be immediately deployed and used on-site. The LED indicators and installation schematic are shown in the figure on the left.

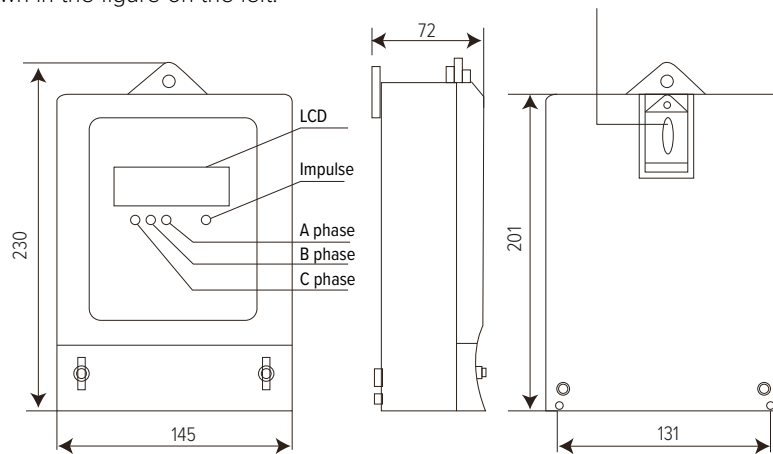

It is recommended to install Online Kit MCAC-PIDU accessory if it is required electricity charge distribution among different tenants requiring independent power supply for indoor units.

technical data



		DTS634	DTS634-F
Dimensions (Width x Height x Depth)	mm	145x230x72	145x230x72
Power supply	mm	220V - 500V (50/60Hz)	220V - 500V (50/60Hz)

NETWORK ELECTRICITY DISTRIBUTION MODULE

SIMPLE DESIGN


- External contact interface module
- Designed specifically for Mini VRF up to 180T size
- Provides the OAE ports for Mini VRF to connect with the IMM network control system, and distributes electricity across the network.

WIRING DIAGRAM

OAE ports: connects to the OAE port of the ammeter.

PQE ports: connects to the PQE port of the outdoor unit.

Each port on IMM controller can only be connected with one NIM10 through K1K2E ports.

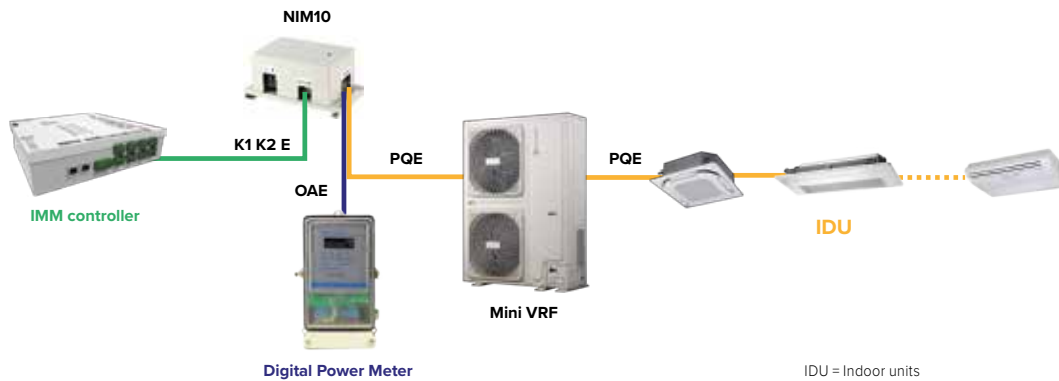

technical data



NIM10


Dimensions (Width x Height x Depth)	mm	150x85x70
Power supply	-	198-242V (50/60Hz)

ONLINE KIT

IDEAL FOR MULTI-TENANT APPLICATIONS

The online kit, to be provided for each indoor unit in the system, allows to provide separate power supplies between the different room terminals. The accessory, in fact, brings voltage to the expansion valve of the indoor unit, ensuring its closure and isolating from the refrigerant point of view in case of power failure.

In this way, in case it is required to disconnect the power supply and section a part of the system (e.g. disconnection of voltage from a tenant), the rest of the system continues to operate regularly, avoiding anomalies.

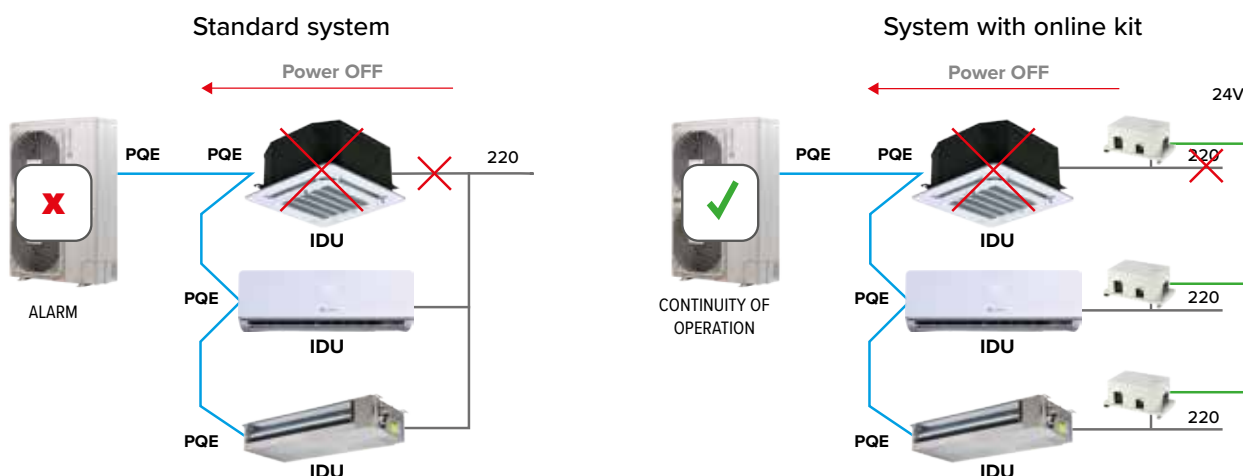

technical data



MCAC-PIDU

Dimensions (Width x Height x Depth)	mm	146,6x100,6x46,8
Power supply	mm	220V AC + 24V AC (adapter not included)

AHU KIT

WIDE CAPACITY RANGE

Four kits can be used in parallel, giving an overall capacity range of 0,8 to 80 HP



CE-AHUKZ-00B
2,2-9kW



CE-AHUKZ-01B
9-20 kW



CE-AHUKZ-02B
20-36 kW



CE-AHUKZ-03B
36-56 kW



AHUKZ-00D
2,2-9kW

NEW



AHUKZ-01D
9-20 kW

NEW



AHUKZ-02D
20-36 kW

NEW



AHUKZ-03D
36-56 kW


NEW

MULTIPLE WAYS OF USE

The units managed through the kit can be managed in a simplified way through the Clivet wired control provided, making the main settings from the control and letting the module send and receive the signals directly to the unit.

For applications requiring greater complexity, it is possible to interpose a third party controller (PLC) delegating to it the control of the equipment and communicating with the VRF system through the AHU kit by means of input/output signals.


In this way it is possible to guarantee maximum flexibility of use and customisation of the functions specifically required by each application.

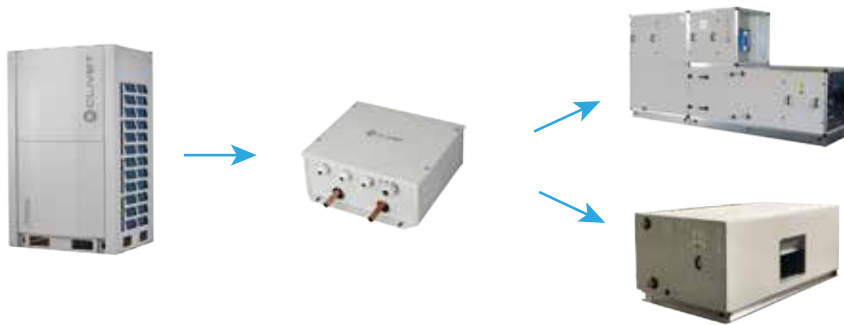


INTEROPERABILITY

AHU kit can be used to connect VRF outdoor units with direct expansion air handling units or compatible other-brand AC fan motor indoor units, giving flexibility to adapt to the specific needs of each large project.


AHU kits are compatible with Clivet VRF systems in combination also with all other indoor units series. Whole system can be managed via centralized controllers or other gateways.

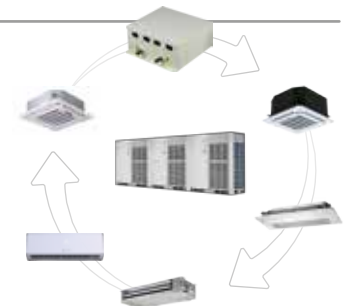

SINGLE AHU CONTROL BOX CONNECTION

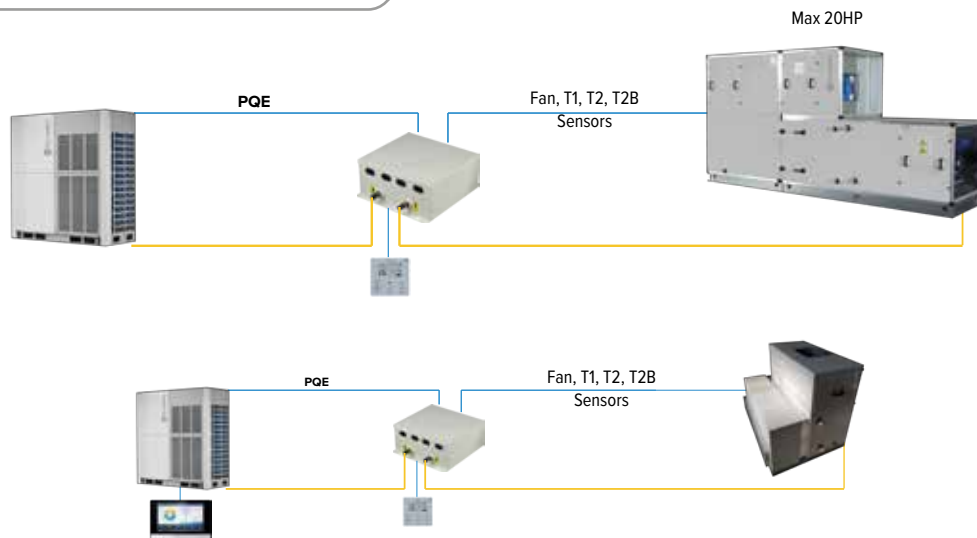

MULTI AHU CONTROL BOXES CONNECTION

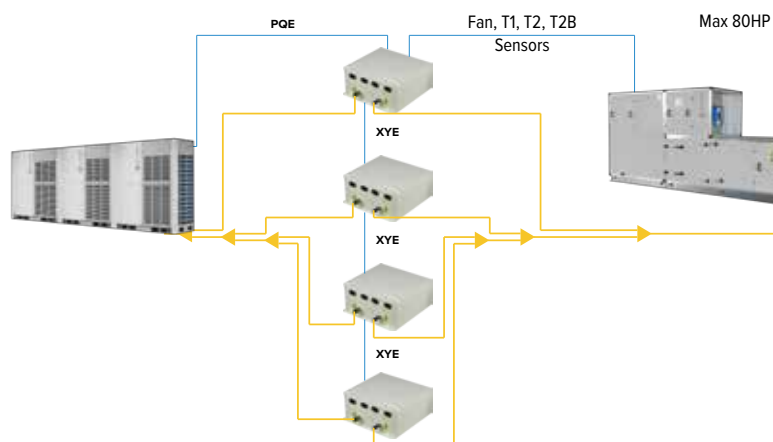

technical data



		AHUKZ-00D	AHUKZ-01D	AHUKZ-02D	AHUKZ-03D
Air flow range	m ³ /h	500 ~ 1800	1400 ~ 4300	3000 ~ 7700	5400 ~ 12000
Capacity range	kW	2,2 ~ 9	9 ~ 20	20 ~ 36	36 ~ 56
Dimensions (Width x Height x Depth)	mm	344x360x125	344x360x125	344x360x125	344x360x125
Power supply	-	220-240V (50/60Hz)	220-240V (50/60Hz)	220-240V (50/60Hz)	220-240V (50/60Hz)







		CE-AHUKZ-00B	CE-AHUKZ-01B	CE-AHUKZ-02B	CE-AHUKZ-03B
Air flow range	m ³ /h	500 ~ 1800	1400 ~ 4300	3000 ~ 7700	5400 ~ 12000
Capacity range	kW	2,2 ~ 9	9 ~ 20	20 ~ 36	36 ~ 56
Dimensions (Width x Height x Depth)	mm	350x375x150	350x375x150	350x375x150	350x375x150
Power supply	-	220-240V (50/60Hz)	220-240V(50/60Hz)	220-240V(50/60Hz)	220-240V(50/60Hz)






*AHUKZ-**B available while stocks last.

AHUKZ-**D compatible with MV6R series in addition to other outdoor units already compatible with kit "B" and possibility to control supply air temperature in addition to return air temperature control and 0-10V signal for capacity step

BRANCH JOINTS

Type	Name	Packed Dimensions (mm)	Gross Weight (kg)	Description		
Branch joint for heat pump outdoor unit		FQZHW-02N1D	255×150×185	1,5	For two MW series outdoor units connection	
		FQZHW-02N1E	255×150×185	2,0	For two MV6 series outdoor units connection	
		FQZHW-03N1D	345×160×285	3,4	For three MW series outdoor units connection	
		FQZHW-03N1E	345×160×285	4,3	For three MV6 series outdoor units connection	
	Branch joint indoor unit		FQZHN-01D	290×105×100	0,4	$A^* < 16.6/16.8kW$
			FQZHN-02D	290×105×100	0,6	$16.6/16.8kW \leq A^* < 33kW$
		FQZHN-03D	310×130×125	0,9	$33kW \leq A^* < 66/71kW$	
		FQZHN-04D	350×180×170	1,5	$66/71kW \leq A^* < 92/104kW$	
		FQZHN-05D	365×195×215	1,9	$92/104kW \leq A^* < 245kW$	
		FQZHN-06D	390×230×255	3,1	$245kW \leq A^* < 269kW$	
		FQZHN-07D	390×230×255	3,4	$269kW \leq A^*$	
VRF Header		DXFQT4-01	450x240x100	1,4	VRF Header - 4 branches	
		DXFQT8-01	755x275x130	3,1	VRF Header - 4 branches	

A* = total capacity of indoor units connected to this branch joint. Different values depend on series

Type		Name	Packed Dimensions (mm)	Gross Weight (kg)	Description
Branch joint between heat recovery outdoor unit		FQZHW-02SB1	272×167×232	3,5	For two MV6R series outdoor units connection
		FQZHW-03SB1	472×157×312	6,1	For three MV6R series outdoor units connection
Branch joint between MS BOX unit and outdoor unit		FQZHN-01SB1	257×127×107	0,4	$A^* < 16.8\text{kW}$
		FQZHN-02SB1	287×137×107	1,0	$16.8 \leq A^* < 33\text{kW}$
		FQZHN-03SB1	297×167×177	1,6	$33\text{kW} \leq A^* < 71\text{kW}$
		FQZHN-04SB1	372×197×187	2,4	$71\text{kW} \leq A^* < 104\text{kW}$
		FQZHN-05SB1	432×222×227	3,5	$104\text{kW} \leq A^*$
Branch joint between MS BOX and indoor unit		FQZHN-01D	290×105×100	0,4	$A^* < 22.4\text{kW}$
		FQZHN-02D	290×105×100	0,6	$22.4\text{kW} \leq A^* < 28\text{kW}$
Branch joint kit for MS box for 16-28 kW indoor units connection		FQZHN-09A	287×137×107	0,7	$16\text{kW} \leq A^* \leq 28\text{kW}$

A* = total capacity of indoor units connected to this branch joint

CONTENTS

SERIES	SIZE FROM	TO	TRADE NAME	GROUP	PAGE
AHUKZ-00D	-	-	AHU KIT	CONTROL SYSTEMS	118
AHUKZ-01D	-	-	AHU KIT	CONTROL SYSTEMS	118
AHUKZ-02D	-	-	AHU KIT	CONTROL SYSTEMS	118
AHUKZ-03D	-	-	AHU KIT	CONTROL SYSTEMS	118
AQX VRF Custom	-	-	AQX VRF		80
AQX VRF Standard	3000	20000	AQX VRF	HRV and PRIMARY AIR	80
CCM08	-	-	BACnet® GATEWAY	CONTROL SYSTEMS	104
CCM15	-	-	DATA CLOUD CONVERTER	CONTROL SYSTEMS	96
CCM-180AWS	-	-	INDOOR CENTRALIZED CONTROLLERS	CONTROL SYSTEMS	92
CCM18A	-	-	Modbus® GATEWAY	CONTROL SYSTEMS	108
CCM18ANU	-	-	Modbus® GATEWAY	CONTROL SYSTEMS	108
CCM-270A/WS	-	-	INDOOR CENTRALIZED CONTROLLERS	CONTROL SYSTEMS	92, 98
CCM30-B	-	-	Simplified centralized control	CONTROL SYSTEMS	94
CE-AHUKZ-00B	-	-	AHU KIT	CONTROL SYSTEMS	118
CE-AHUKZ-01B	-	-	AHU KIT	CONTROL SYSTEMS	118
CE-AHUKZ-02B	-	-	AHU KIT	CONTROL SYSTEMS	118
CE-AHUKZ-03B	-	-	AHU KIT	CONTROL SYSTEMS	118
CN-2-XMi	D71	D560	HIGH STATIC PRESSURE DUCT	INDOOR UNITS	61
CNFA-2-XMi	D125	D140	FRESH AIR PROCESSING UNIT	INDOOR UNITS	62
CNT2-2-XMi	D17	D140	MEDIUM STATIC PRESSURE DUCT	INDOOR UNITS	60
CPAN-XHE3	Size 1	Size 6	ZEPHIR3	HRV and PRIMARY AIR	84
DDL-2-XMi	D36	D140	CEILING & FLOOR	INDOOR UNITS	64
DTS634	-	-	DIGITAL POWER METER	CONTROL SYSTEMS	115
DTS634-F	-	-	DIGITAL POWER METER	CONTROL SYSTEMS	115
DXF	-	-	Branch Joints	BRANCH JOINTS	120
DZDF4-2-XMi	D22	D80	FLOOR STANDING	INDOOR UNITS	67
DZDF5-2-XMi	D22	D80	FLOOR STANDING	INDOOR UNITS	67
DZGF3B-2-XMi	D22	D80	FLOOR STANDING	INDOOR UNITS	66
FQZ	-	-	Branch Joints	BRANCH JOINTS	120
GW-BAC	-	-	BACnet® GATEWAY	CONTROL SYSTEMS	104
GW-KNX	-	-	KNX GATEWAY	CONTROL SYSTEMS	110
GW-KNX(A)	-	-	KNX GATEWAY	CONTROL SYSTEMS	110
GW-LON	-	-	LONWORKS® GATEWAY	CONTROL SYSTEMS	106
GW-LON(A)	-	-	LONWORKS® GATEWAY	CONTROL SYSTEMS	106
GWMN-2-XMi	D17	D90	WALL-MOUNTED	INDOOR UNITS	63
GW-MOD	-	-	Modbus® GATEWAY	CONTROL SYSTEMS	108
GW-MOD(A)	-	-	Modbus® GATEWAY	CONTROL SYSTEMS	108
HRV-2-Mi	D200	D2000	HRV - HEAT RECOVERY VENTILATOR	HRV and PRIMARY AIR	74
HRV-DX-2-XMi	D500	D1000	HRV-DX-2 HEAT RECOVERY VENTILATOR WITH DX COIL	HRV and PRIMARY AIR	76
HRV-DXL-2-XMi	D1500	D3100	HRV-DXL-2 HEAT RECOVERY VENTILATOR WITH DX COIL	HRV and PRIMARY AIR	78
HWM-2-XMi 140	140	-	HIGH TEMPERATURE HYDRO MODULE	INDOOR UNITS	68
IMM CONTROLLER	-	-	IMM NETWORK CONTROL SYSTEM	CONTROL SYSTEMS	101
IMM SOFTWARE	-	-	IMM NETWORK CONTROL SYSTEM	CONTROL SYSTEMS	101
IMMP-BAC	-	-	IMMPRO NETWORK CONTROL SYSTEM / BACnet® GATEWAY	CONTROL SYSTEMS	98, 104
IMMP-BAC(A)	-	-	IMMPRO NETWORK CONTROL SYSTEM / BACnet® GATEWAY	CONTROL SYSTEMS	98, 104
IMMP-M	-	-	IMMPRO NETWORK CONTROL SYSTEM	CONTROL SYSTEMS	98
IMMP-S	-	-	IMMPRO NETWORK CONTROL SYSTEM	CONTROL SYSTEMS	98
LonGW64	-	-	LONWORKS® GATEWAY	CONTROL SYSTEMS	106
MA-EK	-	-	XYE EXTENSION KIT	CONTROL SYSTEMS	112
MCAC-PIDU	-	-	ONLINE KIT	CONTROL SYSTEMS	117
MS	01N1-D	12N1-D	MS BOX	OUTDOOR UNITS	45
MSAN-XMi	80M	450T	MINI VRF	OUTDOOR UNITS	18
MV6i-XMi	252T	900T	VRF MV6i	OUTDOOR UNITS	30
MV6-XMi	252T	2700T	VRF MV6	OUTDOOR UNITS	22
MV6R-XMi	252T	1500T	VRF MV6R	OUTDOOR UNITS	36
MW-XMi	252T	1005T	VRF MW	OUTDOOR UNITS	46
NIM09	-	-	INFRARED SENSOR CONTROLLER	CONTROL SYSTEMS	113
NIM10	-	-	NETWORK ELECTRICITY DISTRIBUTION MODULE	CONTROL SYSTEMS	116
Q1DN-2-XMi	D18	D71	1-WAY CASSETTE	INDOOR UNITS	56
Q2DN-2-XMi	D22	D71	2-WAY CASSETTE	INDOOR UNITS	57
Q4AN-2-XMi	D17	D52	COMPACT 4-WAY CASSETTE	INDOOR UNITS	58
Q4DN-2-XMi	D28	D140	4-WAY CASSETTE	INDOOR UNITS	59
RM12D	-	-	WIRELESS REMOTE CONTROLLER	CONTROL SYSTEMS	88
RT01	-	-	REMOTE SENSOR PACKAGE	CONTROL SYSTEMS	114
WDC-120G/WK	-	-	WIRED CONTROLLERS	CONTROL SYSTEMS	90
WDC-86E/KD	-	-	WIRED CONTROLLERS	CONTROL SYSTEMS	90

VRF MV6 ALTO DESIGN

Reliability, power and high efficiency



FROM -25°C TO 24°C
HEATING MODE



ENHANCED
VAPOR INJECTION



FROM -15°C TO 48°C
COOLING MODE

HIGH EFFICIENCY HEAT PUMP EXTERNAL UNITS:

EVI injection compressor, full capacity at -5 °C, wide operation field, multiple functions for energy saving and simplified maintenance.



COMFORT FOR THE
PLANET & PEOPLE



www.clivet.com

NOTES

Clivet, in compliance with Regulation 517/2014, informs that its products contain or function with the use of fluorinated greenhouse gases: R-32 (GWP 675), R-410A (GWP 2087,5), R-134a (GWP 1430) and R-407C (GWP 1773,85), R-513A (GWP 631), R-1234ze (GWP 7).

Data contained in this catalogue are not binding and may be changed by the Manufacturer without notice.
No part of this publication may be reproduced.
Updated data available on site www.clivet.com


Clivet also respects the environment with printing:



FOR OVER 30 YEARS WE HAVE BEEN OFFERING
SOLUTIONS TO ENSURE SUSTAINABLE COMFORT
AND THE WELL-BEING OF
PEOPLE AND THE ENVIRONMENT

Valid from: May 2021
DG21A017GB-01

www.clivet.com



CLIVET S.p.A.
Via Camp Lonc 25, Z.I. Villapaiera
32032 Feltre (BL) - Italy
Tel. +39 0439 3131 - Fax +39 0439 313300
info@clivet.it

MideaGroup
humanizing technology